
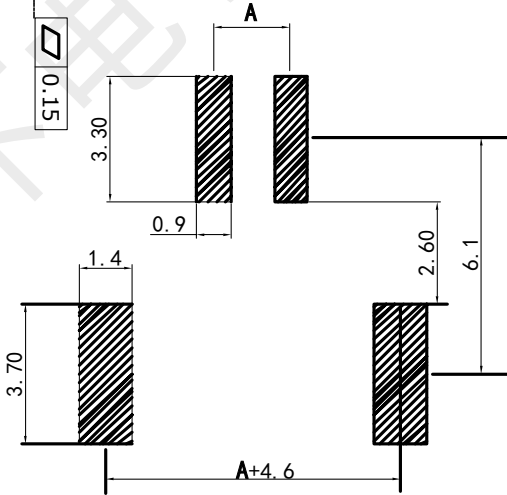

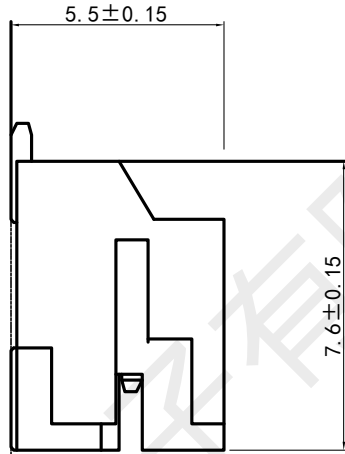


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面		2020.5.13

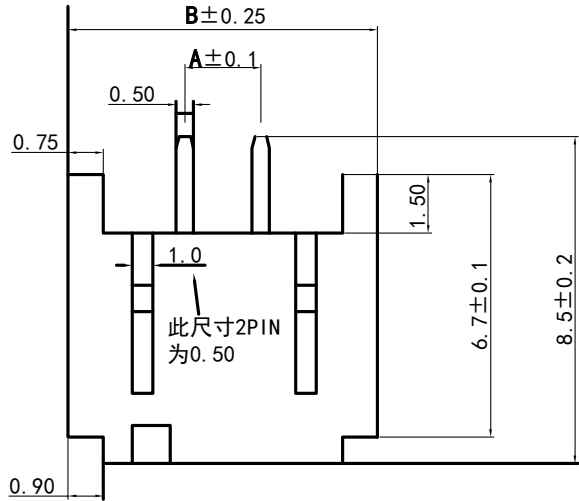

孔数	型号	尺寸 (mm)	
		A	B
2	PH-2ALT	2.0	8
3	PH-3ALT	4.0	10
4	PH-4ALT	6.0	12
8	PH-8ALT	14	20
...
16	PH-16ALT	30.0	36

Specifications 技术规格:

Current rating: 2A
 额定电流: 2A
 Voltage rating: 100V AC, DC
 额定电压: 100V AC, DC
 Insulation Resistance: 1000M \square Min.
 绝缘电阻: 最小1000M \square
 Dielectric Withstanding: 800V AC 1Min
 耐电压: 800V AC 1分钟
 Contact Resistance: 20m \square Max.
 接触电阻: 最大20m \square
 Operating Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C
 工作温度: -25 $^{\circ}$ C 到85 $^{\circ}$ C

Materials/材料:

Contact Material: Brass (Sn plating)
 接触铜针材料: 黄铜 (镀锡)
 Soldering Terminal: Bronze (Sn plating)
 焊片材料: 磷铜 (镀锡)
 Insulation Material: LCP UL94V-0 Beige
 绝缘体材料: LCP UL94 V-0 米黄色

 深圳市韩下电子有限公司

GENERAL TOLERANCE	
X. $^{\circ}$ \pm 3 $^{\circ}$.XXX \pm 0.10
.X $^{\circ}$ \pm 2 $^{\circ}$.XX \pm 0.15
.XX $^{\circ}$ \pm 1 $^{\circ}$.X \pm 0.25
.XXX $^{\circ}$ \pm 0.5 $^{\circ}$	X. \pm 0.35

DESIGN:	黄彬	DATE:	2020.5.13
CHECKED:	张伟	DATE:	2020.5.13
AUDITED:		DATE:	
APPROVED:	罗小春	DATE:	2020.5.13

DWG. NO.	
PART NO.	PH-NAWT

TITLE:
HX-PH2.0-8PWT

REV.	UNIT.	SCALE.
A1	MM	1:1