
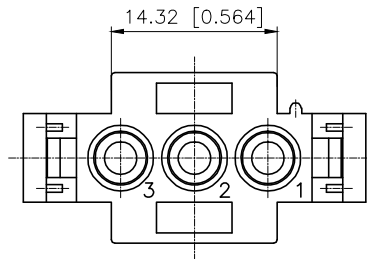
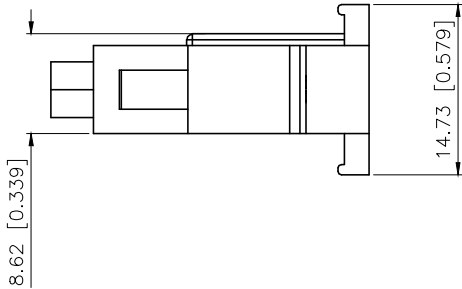


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.23	阿树



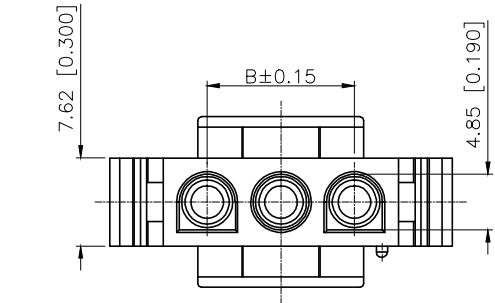


- SPECIFICATIONS
- Voltage rating:600V AC/DC
 - Current rating:13A AC/DC
 - Withstanding Voltage:3500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤15mΩ


PART NO.:

X9635 H M-XX N2
① ② ③ ④ ⑤

- 1.Series No
2.Category:H-HSG
3.Category:M-Male Housing
4.Row No.Pin No:XX-02~10P
5.Material:N0-Nylon 66 UL94V-0 (White)
N2-Nylon 66 UL94V-2 (White)

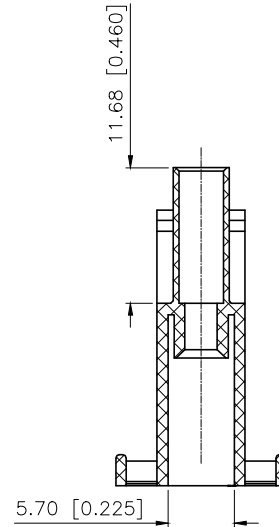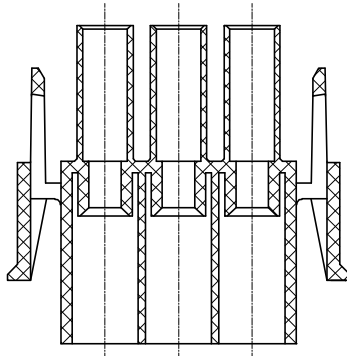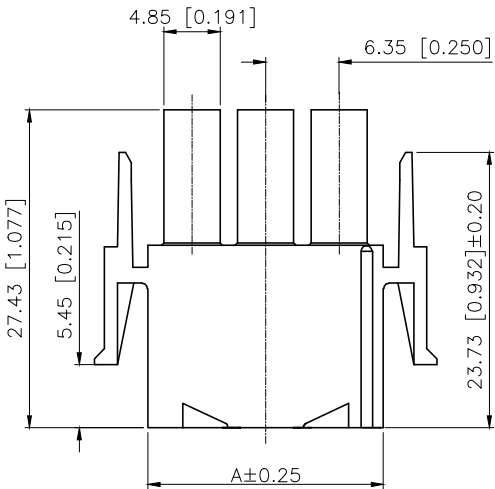

Poles	Dimensions(mm)	
	A	B
2	13.97	6.35
3	20.32	12.70
4	26.67	19.05
5	33.02	25.40
6	39.37	31.75
8	52.07	44.45
10	64.77	57.15



X9635HM-XX-N0	Nylon 66 UL94V-0	X9635W	X9635TF
X9635HM-XX-N2	Nylon 66 UL94V-2		
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 6.35mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X9635HM-XX-N2
APPROVED		SIZE: A4	DWG NO.: