



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图框升级整理图面	2024.08.08	阿 树



2 Pin样式



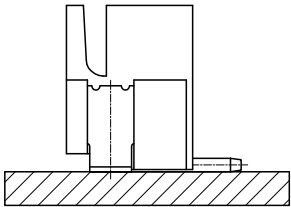


Assembly Layout


- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:1000V AC/minute
 - Temperature range:-45°C+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ

PART NO.:
X8821 W V-S XX S-9T SN
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No
② Category:W-Wafer
③ Welding Board Angle:V-Stright 180°
④ Welding Way:S-SMT
⑤ Row No-Pin No: XX-02P~20P
⑥ Material:9t-PA9t UL94V-0
⑦ Planting Category:SN-Tin Plated

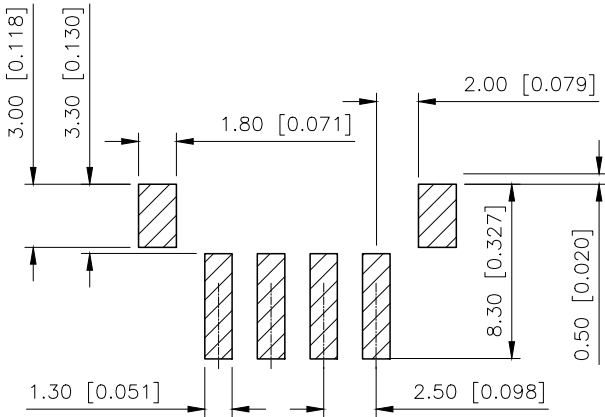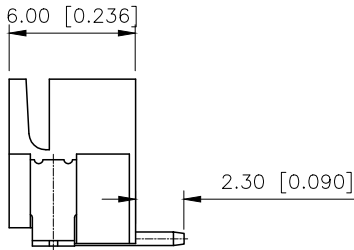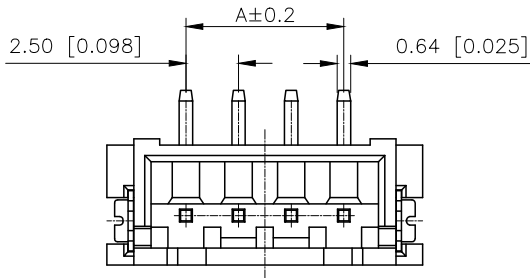

PCB Layout

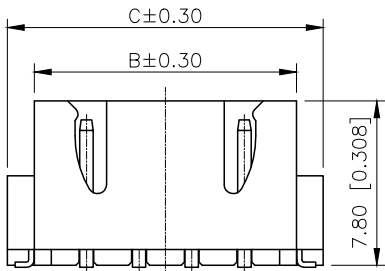

3~16 Pin样式

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.50	7.45	10.00	10	22.50	27.45	30.00
03	5.00	9.95	12.50	11	25.00	29.95	32.50
04	7.50	12.45	15.00	12	27.50	32.45	35.00
05	10.00	14.95	17.50	13	30.00	34.95	37.50
06	12.50	17.45	20.00	14	32.50	37.45	40.00
07	15.00	19.95	22.50	15	35.00	39.95	42.50
08	17.50	22.45	25.00	16	37.50	42.45	45.00
09	20.00	24.95	27.50				

X8821WVS-XX-9TSN	PA9T	Brass	X8821H
PART NO	Material	Material(Brass)	Suitable XKB Housing

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW:		MODEL TYPE: 2.50 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X8821WVS-XX-9TSN
APPROVED		SIZE:	A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1