
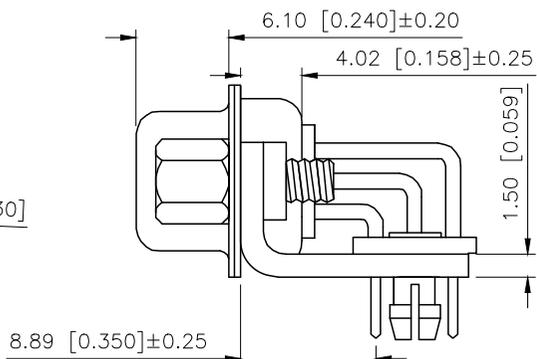


| REVISIONS |         |          |                     |            |        |
|-----------|---------|----------|---------------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION         | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE     | /          | /      |
| A1        | N/A     |          | 独立各PIN数图纸, 增加开孔定位尺寸 | 2024.12.12 | 阿树     |


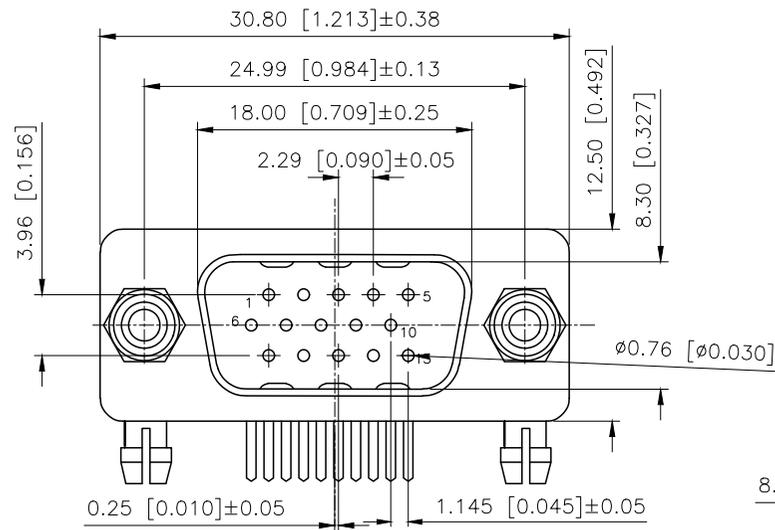


Specifications:  
规格:  
Current rating:5A AC/DC  
额定电流: 5A AC/DC  
Voltage rating:500V AC  
额定电压: 500V AC  
Withstanding voltage:1000V AC/MIN  
耐受电压: ≥1000V AC/分钟  
Temperature range:-55℃-+105℃  
温度范围: -55℃-+105℃  
Insulation resistance:1000MΩMIN  
绝缘电阻: ≥1000MΩ  
Contact resistance:30mΩMAN  
接触电阻: ≤30mΩ  
Material And FINISHED:  
材料和成本:  
INSULATOR:PBT+30% GLASS FILLED UL 94V-0  
绝缘体: PBT+30% 玻璃填充 UL 94V-0  
SHELL: Steel Plated Ni  
外壳: 钢 镀锡  
CONTACT MATERIAL:Brass  
触点材料: 黄铜

PART NO.:

X06 15 W C X X X  
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series NO.
- ②Row No.Pin No:15PIN
- ③Welding Board Angle :W-Male
- ④C: Car-pin
- ⑤Planting Category:  
1:1U' ;2:2U' ;3:3U' ;4:5U' ;5:15U' 6:30U' ;7:AuSn
- ⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
- ⑦1:TYPE-1; 2:TYPE-2;

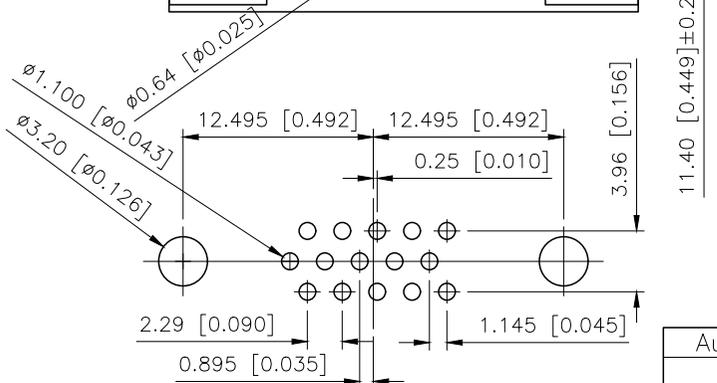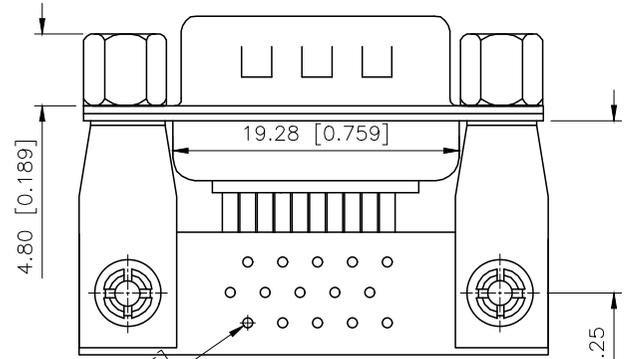

PCB LAYOUT

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |







|          |    |       |       |             |            |
|----------|----|-------|-------|-------------|------------|
| DESIGN   | 阿树 | VIEW: |       | MODEL TYPE: | D-SUB      |
| CHECKED  |    | UNIT: | mm/in | PART NO.:   | X0615WCXXX |
| APPROVED |    | SIZE: | A4    | DWG NO.:    |            |

XKB INDUSTRIAL PRECISION CO.,LIMITED

|       |      |          |
|-------|------|----------|
| SCALE | PAGE | REVISION |
| N/A   | 1/1  | A1       |

| REVISIONS |         |          |                     |            |        |
|-----------|---------|----------|---------------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION         | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE     | /          | /      |
| A1        | N/A     |          | 独立各PIN数图纸, 增加开孔定位尺寸 | 2024.12.12 | 阿树     |

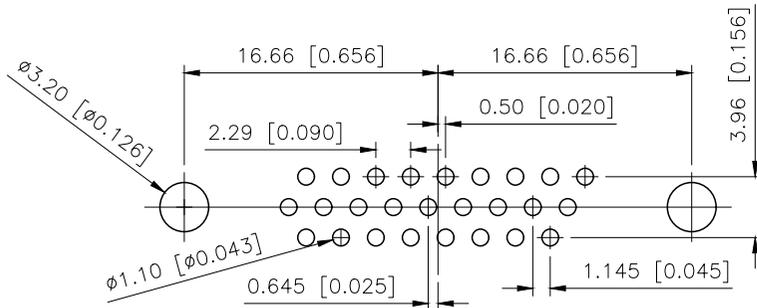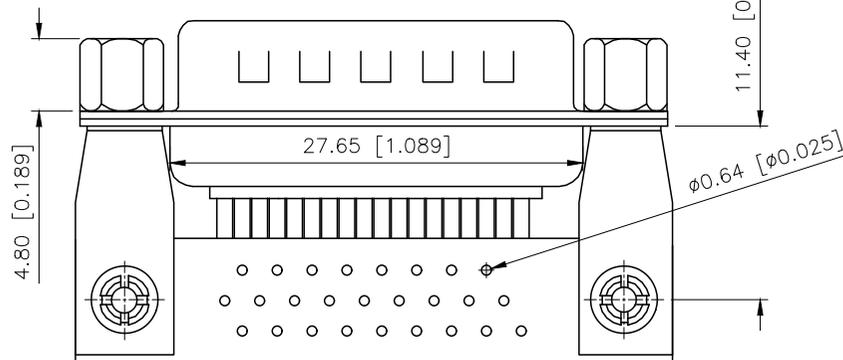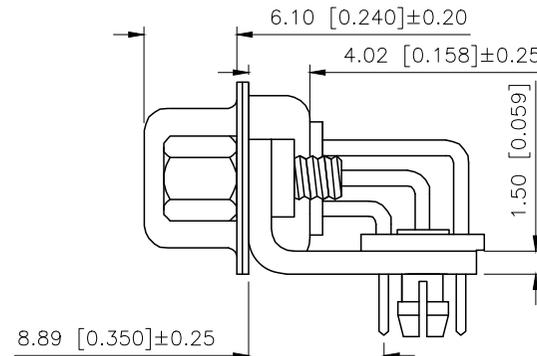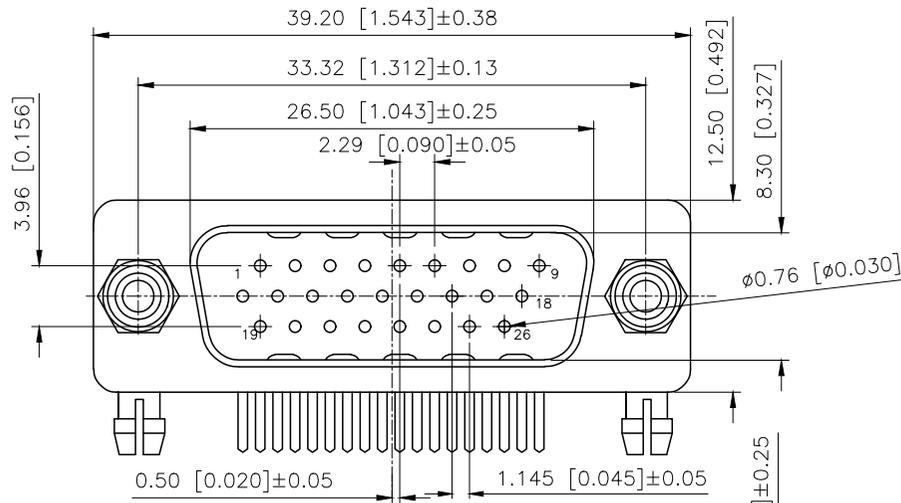

Specifications:

规格:

Current rating:5A AC/DC  
 额定电流: 5A AC/DC  
 Voltage rating:500V AC  
 额定电压: 500V AC  
 Withstanding voltage:1000V AC/MIN  
 耐受电压: ≥1000V AC/分钟  
 Temperature range:-55℃+105℃  
 温度范围: -55℃+105℃  
 Insulation resistance:1000MΩMIN  
 绝缘电阻: ≥1000MΩ  
 Contact resistance:30mΩMAN  
 接触电阻: ≤30mΩ  
 Material And FINISHED:  
 材料和成本:  
 INSULATOR:PBT+30% GLASS FILLED UL 94V-0  
 绝缘体: PBT+30% 玻璃填充 UL 94V-0  
 SHELL: Steel Plated Ni  
 外壳: 钢 镀锡  
 CONTACT MATERIAL:Brass  
 触点材料: 黄铜

PART NO.:

X06 26 W C X X X  
 ① ② ③ ④ ⑤ ⑥ ⑦





- ①Series NO.
- ②Row No.Pin No:26PIN
- ③Welding Board Angle :W-Male
- ④C: Car-pin
- ⑤Planting Category:  
1:1U' ;2:2U' ;3:3U' ;4:5U' ;5:15U' 6:30U' ;7:AuSn
- ⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
- ⑦1:TYPE-1; 2:TYPE-2;

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |    |             |                         |
|----------|----|-------------|-------------------------|
| DESIGN   | 阿树 | VIEW:       | MODEL TYPE:<br>D-SUB    |
| CHECKED  |    | UNIT: mm/in | PART NO.:<br>X0626WCXXX |
| APPROVED |    | SIZE: A4    | DWG NO.:                |

| REVISIONS |         |          |                     |            |        |
|-----------|---------|----------|---------------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION         | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE     | /          | /      |
| A1        | N/A     |          | 独立各PIN数图纸, 增加开孔定位尺寸 | 2024.12.12 | 阿树     |

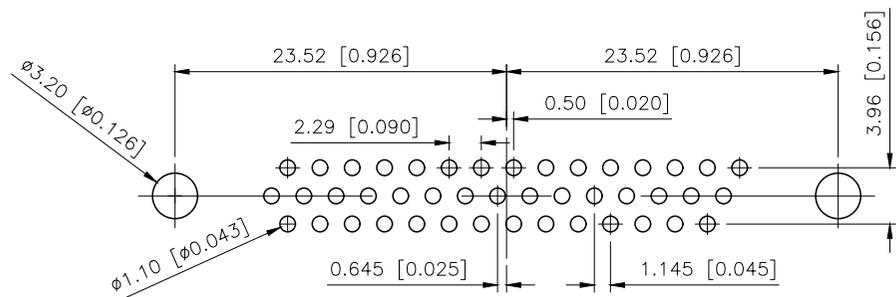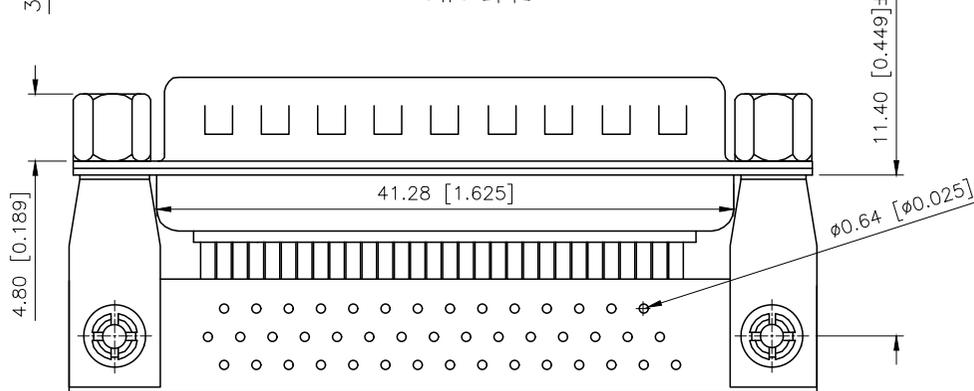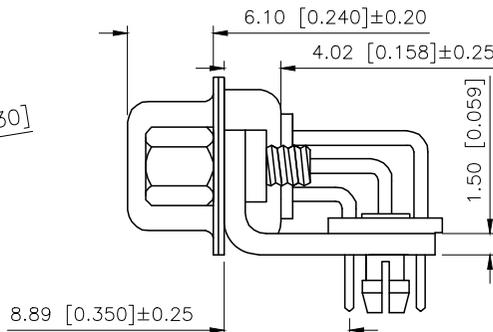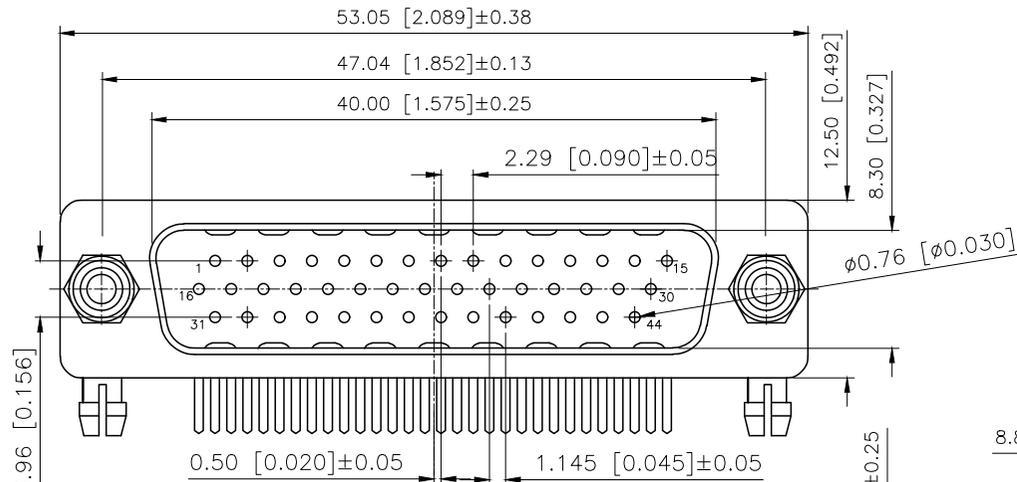

PCB LAYOUT

Specifications:

规格:  
 Current rating:5A AC/DC  
 额定电流: 5A AC/DC  
 Voltage rating:500V AC  
 额定电压: 500V AC  
 Withstanding voltage:1000V AC/MIN  
 耐受电压: ≥1000V AC/分钟  
 Temperature range:-55℃-+105℃  
 温度范围: -55℃-+105℃  
 Insulation resistance:1000MΩMIN  
 绝缘电阻: ≥1000MΩ  
 Contact resistance:30mΩMAN  
 接触电阻:≤30mΩ  
 Material And FINISHED:  
 材料和成本:  
 INSULATOR:PBT+30% GLASS FILLED UL 94V-0  
 绝缘体: PBT+30% 玻璃填充 UL 94V-0  
 SHELL: Steel Plated Ni  
 外壳: 钢 镀锡  
 CONTACT MATERIAL:Brass  
 触点材料: 黄铜

PART NO.:

X06 44 W C X X X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ①Series N0.
- ②Row No.Pin No:44PIN
- ③Welding Board Angle :W-Male
- ④C: Car-pin
- ⑤Planting Category:  
 1:1U' ;2:2U' ;3:3U' ;4:5U' ;5:15U' 6:30U' ;7:AU SN
- ⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
- ⑦1:TYPE-1; 2:TYPE-2;

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |    |       |       |             |            |
|----------|----|-------|-------|-------------|------------|
| DESIGN   | 阿树 | VIEW: |       | MODEL TYPE: | D-SUB      |
| CHECKED  |    | UNIT: | mm/in | PART NO.:   | X0644WCXXX |
| APPROVED |    | SIZE: | A4    | DWG NO.:    |            |

