
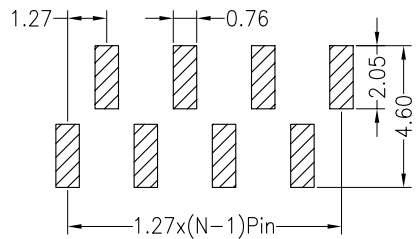
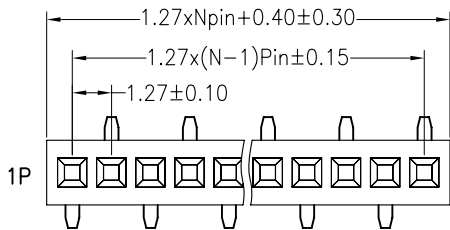
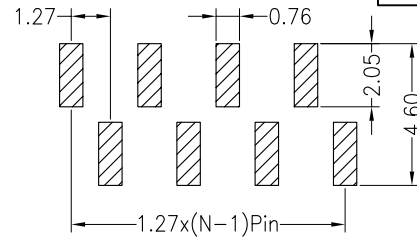


SAMZO

REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2013.06.21

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)


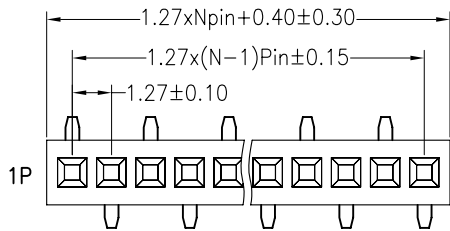


SPECIFICATIONS

Rated Current:1.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°c to +105°c

Contact Material:Phosphor Bronze  
Contact Plating:Au Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

- A. 名称: 5B-排母
- B. 间距: I-1.27mm
- C. 方式: E-180° SMT
- D. 塑高(H): 6-4.3mm
- E: 总长(L): 46-4.6mm
- F: 板针宽(PC): 35-3.5
- G: 针数: 102-1\*2P(2-50PIN)
- H: 定位: W-无定位
- I: 物料编码: 0-常规

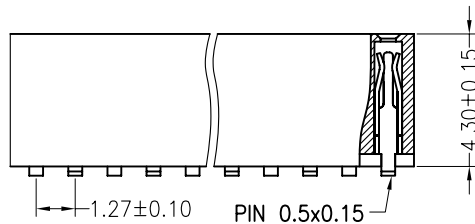

5B I E 6 - 46 35 - 1\*\* - W 0  
A B C D E F G H I

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR	FIRST VIEW				The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM	TITLE::	
1	针	黄铜	N	镀金						1.27PF 1*NP H4.3 PC3.5 180°SMT	
2	主体	PA6T	1	黑色	GENERAL TOLERANCE				DWG NO: 5BIE6-P672402		
					≥0~2<	±0.15	SCALE	1:1	UNIT	mm	PART NO: 5BIE6180614
					DESIGN	WANGGUIFA	2018.06.12	≥2~5<	SAMZO COMPONENTS		MODEL NO: 5BIE6-4635-1NP-W0
					CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	Electronic switch and connector manufacturer		NAME:
					APPROVED	LILIANJIANG	2018.06.14	≥5			PIN-F CONNECTOR