



Thermal Management Solutions
For Electronics

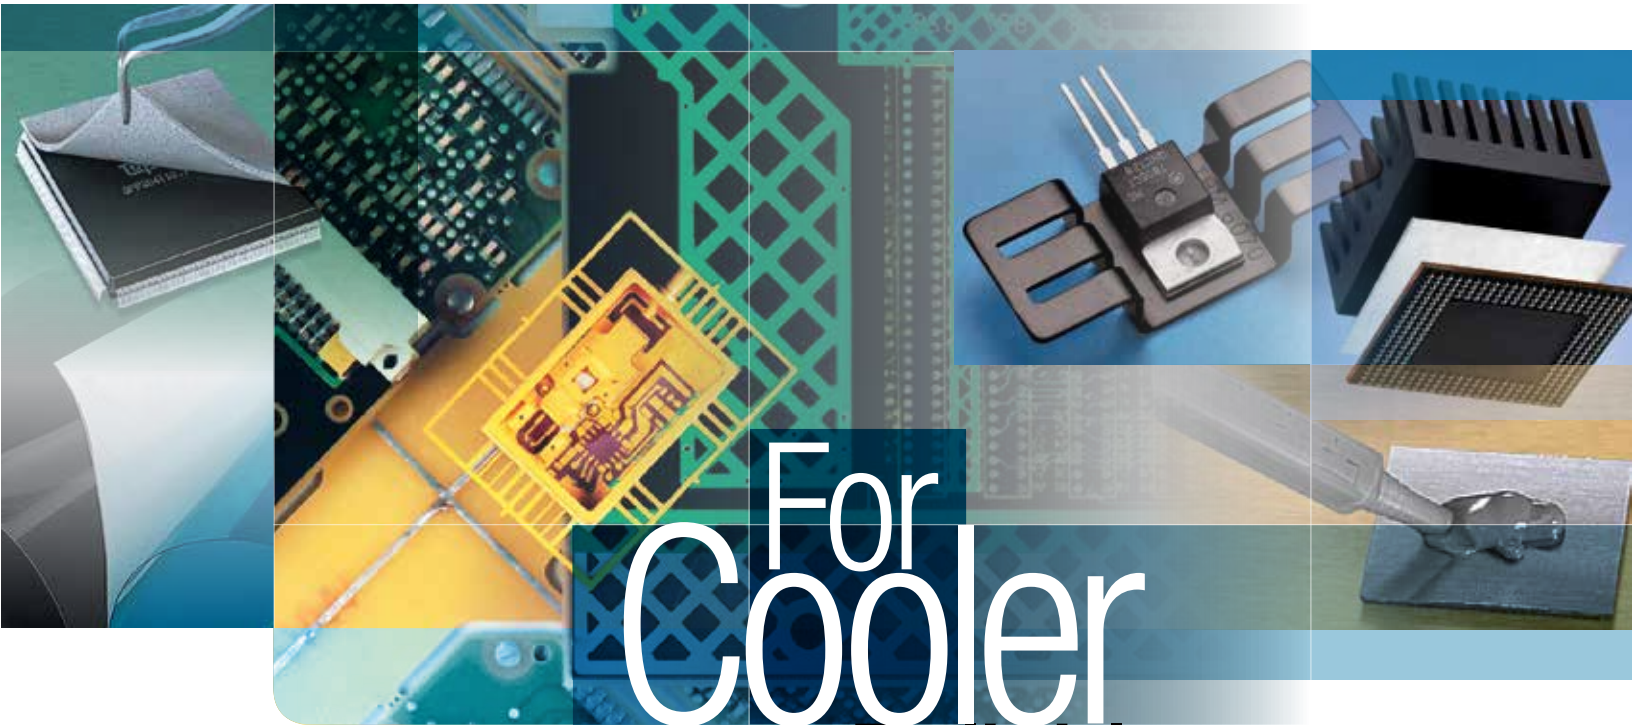


For
Cooler
More Reliable
Devices

3M


3M™ Thermally Conductive Adhesive Transfer Tapes

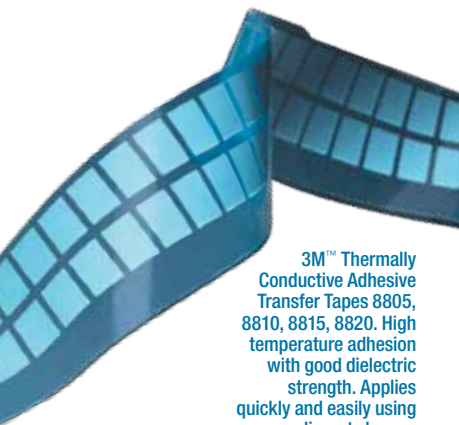

3M™ Thermally Conductive Adhesive Transfer Tapes 8805, 8810, 8815, 8820. High temperature adhesion with good dielectric strength. Applies quickly and easily using die-cut shapes.



Heat Sink. Thermally Conductive Adhesive Transfer Tape bonds a heat sink to a component and provides a thermal path for component cooling.

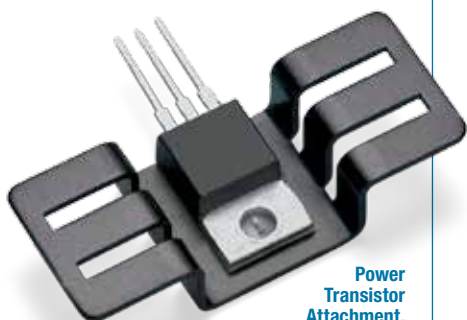

Power Transistor Attachment. 3M™ Thermally Conductive Adhesive Transfer Tape 8810 replaces silicone grease and screws for attaching transistors to heat sink.

This range of high adhesion thin tapes offers efficient thermal transfer for a wide range of applications requiring a thermal management solution: bonding heat sinks, heat spreaders and other cooling devices to IC packages, power transistors, and other heat generating components.

Each tape combines 3M high performance acrylic adhesive with highly conductive ceramic particles for an extremely reliable and user-friendly thermal interface. Highly conformable construction provides excellent wet-out on surfaces.

Select 5, 10, 15 and 20 mil thicknesses to meet application requirements.

3M™ Thermally Conductive Interface Materials Selection Guide

| Product | Description | | | Adhesion Peel Strength @ 72 hr Dwell at RT (N/cm) | Thermal Performance | | Dielectric Properties | |
|---------|--------------------|----------------------------|-------------|--|---------------------|------------------------|--------------------------------|-----------------------------|
| | Base Material Type | Product Thickness (mil/mm) | Filler Type | | Liner Type | Conductivity (W/m-K)** | Impedance °C-1/r²/W (°C-cm²/W) | Dielectric Strength (KV/mm) |

3M™ Thermally Conductive Interface Tapes

Softer - Improved Surface Conformability Acrylic Thermal Tape

| | | | | | | | | | |
|------|------------------------|-----------|---------|------------------|------|-----|------------|-------------------|------------------------|
| 8805 | | 5 (0.13) | | Silicone Release | 7.5 | 0.6 | 0.48 (3.1) | 26 8815 tested | 5.2 x 10 ¹¹ |
| 8810 | Filled Acrylic Polymer | 10 (0.25) | Ceramic | Polyester | 13.0 | | 0.88 (5.7) | | 3.9 x 10 ¹¹ |
| 8815 | | 15 (0.38) | | Polyester | 19.0 | | 1.17 (7.6) | | 3.8 x 10 ¹¹ |
| 8820 | | 20 (0.51) | | Dual Liners | 26.0 | | 1.50 (9.7) | | 3.8 x 10 ¹¹ |

3M™ Thermally Conductive Interface Tapes

Standard Acrylic Thermal Tape

| | | | | | | | | | |
|------|------------------------|-----------|---------|------------------|-----|-----|------------|-------------------|----------------------|
| 9882 | Filled Acrylic Polymer | 2 (0.05) | Ceramic | Silicone Release | 5 | 0.6 | 0.32 (2.1) | 29 9890 tested | 2 x 10 ¹⁴ |
| 9885 | | 5 (0.13) | | Polyester | 6.5 | | 0.49 (3.2) | | |
| 9890 | | 10 (0.25) | | Polyester | 9.5 | | 0.89 (5.7) | | |

3M™ Thermally Conductive Interface Tapes***

High Adhesion

| | | | | | | | | | |
|-----------|------------------------|------------|---------|------------------|-----------|-----|-----------|-----------------------|---|
| TM-670SA* | Filled Acrylic Polymer | 10 (0.25) | Ceramic | Silicone Release | 25.0/5.5 | 0.6 | 1.1 (7.1) | 24 TM-670SA tested | - |
| TM-671SA* | | 15 (0.375) | | Polyester | 30.0/9.3 | | 1.2 (7.8) | | |
| TM-672SA* | | 20 (0.5) | | Polyester | 42.0/11.6 | | 1.4 (9.1) | | |
| 8943 | | 6.7 (0.17) | | Film Liner | 6.7 | | 0.4 | | |

3M™ Thermally Conductive Interface Tapes

Flame Retardant Acrylic Thermal Tape

| | | | | | | | | | |
|----------|------------------------|------------|---------|-----------------|------|-----|-------------|----------------|---|
| 8904-02 | Filled Acrylic Polymer | 7.9 (0.2) | Ceramic | Clear PET Liner | 8.8 | 1.5 | 1.31 (8.49) | 15 | - |
| 8904-025 | | 10 (0.25) | | | 11 | 1.5 | 1.35 (8.74) | 15 | - |
| 8904-05 | | 20 (0.5) | | | 9.9 | 1.5 | 1.50 (9.70) | 15 | - |
| 8940 | | 7.5 (0.19) | | Film Liner | 6.7 | 0.4 | 0.78 (5.1) | 33 8940 tested | - |
| 8910-03 | | 11.8 (0.3) | | Paper | 20.5 | 0.6 | 1.1 (7.2) | 23 | - |

3M™ Thermally Conductive Heat Spreading Tapes

Thermally Conductive / Heat Spreading Tape

| | | | | | | | | | |
|---------|-----------------------------|------------|-----|--|----|---------------------------|------------|----------------------|---|
| 9876-10 | Acrylic Polymer on Cu Layer | 3.9 (0.1) | N/A | 3M Logo Printed Silicone Release Paper | 9 | 250 (X-Y) 0.8 (Z-axis) | 0.21 (1.4) | 20 9876-15 tested | - |
| 9876-15 | | 5.9 (0.15) | | 3M Logo Printed Film Liner | 10 | | 0.28 (1.8) | | |


* TM-67X tapes are designed with a high/low adhesion construction. Face side or non-liner side when product roll is unwound is the lower adhesion side.

** 3M tested in accordance with ASTM 05470TM method.


*** Products are special order in the USA. Please contact your 3M sales support for details.

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.


Effect of Thermal Interface Impedance and Device Power on Chip Temperature

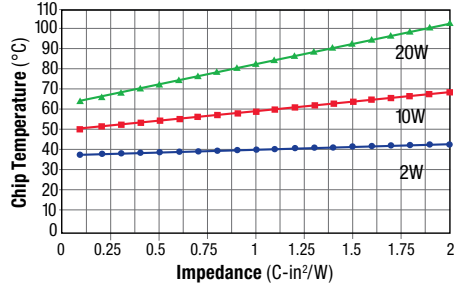

Effect of Wet-Out (Interface Contact) and Device Power on Chip Temperature

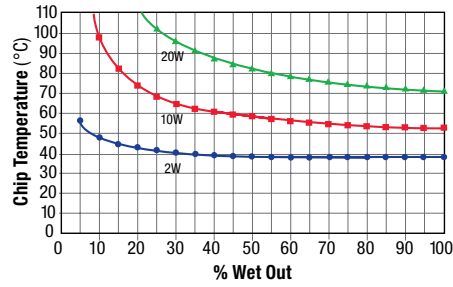

90° Peel Adhesion to Bare Untreated Aluminum/3M 88xx TCATT

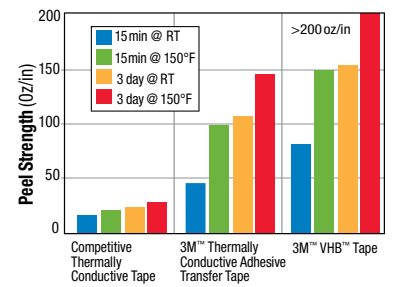

3M™ Thermally Conductive Interface Materials Selection Guide (Continued)

| Product | UL Flammability Rating | Potential Operating Temperature Range* (°C) | Typical Applications | Notes |
|--|--|---|--|--|
| 3M™ Thermally Conductive Interface Tape – Softer - Improved Surface Conformability Acrylic Thermal Tape | | | | |
| 8805 | UL Testing Note: Adhesive tapes are not intended to be used independently as a single component. Tapes are recognized for use with specific substrates and the tape/substrate is tested for a UL rating. | Short Term (Hours-Days) 125-150 Long Term (Weeks-Months) 90-100 | Thermally conductive adhesive transfer tapes with high mechanical strength, improved surface wet-out, and excellent shock performance. Applications include: heat sink attachment, flex circuit bonding, power device attachment and general thermal attachment solutions. | |
| 8810 | | | | |
| 8815 | | | | |
| 8820 | | | | |
| 3M™ Thermally Conductive Interface Tape – Standard Acrylic Thermal Tape | | | | |
| 9882 | UL Testing Note: Adhesive tapes are not intended to be used independently as a single component. Tapes are recognized for use with specific substrates and the tape/substrate is tested for a UL rating. | Short Term (Hours-Days) 125-150 Long Term (Weeks-Months) 90-100 | 3M's original thermally conductive adhesive transfer tape for applications requiring thin bonding with good thermal transfer. | |
| 9885 | | | | |
| 9890 | | | | |
| 3M™ Thermally Conductive Interface Tape – High Adhesion** | | | | |
| TM-670SA* | Not Applicable - Non-Compliant | Short Term (Hours-Days) 110-130 Long Term (Weeks-Months) 80-90 | 3M TCAT TM-67X tapes are designed with a high/low adhesion construction. Face side or non-liner side when product is unwound is the lower adhesion side for good reworkability. | |
| TM-671SA* | | | | |
| TM-672SA* | | | | |
| 8943 | Not Applicable | Short Term (Hours-Days) 125-150 Long Term (Weeks-Months) 90-100 | Thermally conductive tape with good bonding strength. 3M tape 8943 is a single coated tape version of 3M tape 8940. | |
| 3M™ Thermally Conductive Adhesive Tapes (TCAT) – Flame Retardant Acrylic Thermal Tape** | | | | |
| 8904-02 | UL 94-V-0 | Short Term (Hours-Days) 80-90 Long Term (Weeks-Months) 70-80 | High thermal conductivity adhesive tape (15W/m-k), application in LED and heat sink bonding. Re-workability and with excellent conformability to surfaces. | ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL. |
| 8904-025 | UL 94-V-0 | | | |
| 8904-05 | UL 94-V-0 | | | |
| 8940 | UL 94 V-0 See UL listing for specifics of UL test criteria. Product tested with a substrate. | Short Term (Hours-Days) 125-150 Long Term (Weeks-Months) 90-100 | Thermally conductive tape with good bonding strength and flame retardant performance. | |
| 8910-03 | UL 94 V-2 | Short Term (Hours-Days) 110 - 130 Long Term (Weeks-Months) 80 - 90 | For the advanced thermally conductive tape with super adhesion and good flame retardant, 3M TCAT 8910-03 can be considered and recommended as one of high performance thermal attachment solutions. | ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL. |
| 3M™ Thermally Conductive Heat Spreading Tapes | | | | |
| 9876-10 | | Short Term (Hours-Days) 110-130 Long Term (Weeks-Months) 80-90 | Excellent heat spreading on plane direction and low heat conduction on depth direction with good electrical insulation on surface. It is designed for thermal management by heat spreading. | TCoHST has adhesive on one side only. Product is not used to hold an assembly together. TCoHST use is primarily heat spreading in low profile applications when attached to or on a surface opposite a hot device. |
| 9876-15 | | | | |

* End use application testing will determine final temperature range based on final design and other environmental conditions. Suggested temperature range is based on a UL-746 Test Method or a 3M Test Method.

** Products are special order in the USA. Please contact your 3M sales support for details.


Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

3M™ Thermally Conductive Interface Pads



LED BLU Application


LED Assembly



3M™ Thermally Conductive Interface Pads or 3M™ Thermally Conductive Interface Tapes
Heat Sink or Heat Spreader Plate


Automotive Battery Application

Battery Assembly



3M™ Thermally Conductive Acrylic Interface Pads


Notebook Thermal Module Application



3M™ Thermally Conductive Interface Tapes
3M™ Thermally Conductive Grease

Through innovative 3M technology, these soft and conformable pads provide high levels of conductivity for the more demanding applications in the electronics industry. The pads provide excellent handling and can be die cut to fit most applications. Available in silicone and non-silicone elastomers.

- Thermal conductivity: 1.0-4.9 W/m-k
- Available in silicone and acrylic elastomers

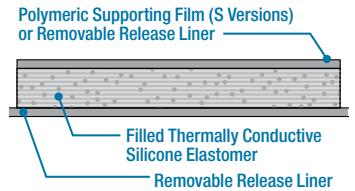

3M™ Thermally Conductive Interface Pads Selection Guide

| Product | Description | | | Adhesion/Shore 00 Softness | Thermal Performance | | Dielectric Properties | |
|---------|--------------------|------------------------|------------|----------------------------|------------------------|--|-----------------------------|-----------------------------|
| | Base Material Type | Product Thickness (mm) | Liner Type | | Conductivity** (W/m-K) | Impedance*** (°C-in ² /W) (°C-cm ² /W) | Dielectric Strength (kV/mm) | Volume Resistivity (Ohm-cm) |




| 3M™ Thermally Conductive Silicone Interface Pads | | | | | | | | | |
|--|-------------------------|---------|-----|--|---|--------------------------|--|------------------------|------------------------|
| 5514 | Filled Silicone Polymer | Ceramic | PET | No added adhesive layer. Pad is tacky and conformable/// Shore 00=58 | 1.6 | 0.44 (2.8) 0.47 (3.0) | 14.0 | 8.6 × 10 ¹³ | |
| 5515 | | | | 7.9 (0.2) 9.8 (0.25) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=80 | 3.0 | 0.29 (1.8) 0.40 (2.6) | 14.5 | 3.6 × 10 ¹⁴ |
| 5515S* | | | | | No added adhesive layer. Pad is tacky and conformable/// Shore 00=50 | 2.7 | 0.62 (3.9) 0.70 (4.5) | 17.7 | 8.6 × 10 ¹⁴ |
| 5516 | | | | 20 (0.5) 40 (1.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=33 | 3.1 | 0.31 (2.0) 0.53 (3.4) | 13.1 | 6.9 × 10 ¹⁴ |
| 5516S* | | | | 60 (1.5) 80 (2.0) | No adhesive layer. Pad is tacky and highly conformable/// Shore = 33 | 3 | 0.75 (4.9) 0.98 (6.3) | 16.0 | |
| 5517 | | | | 40 (1.0) 60 (1.5) 80 (2.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=70 | 4.9 | 0.73 (4.7) 0.98 (6.3) 1.22 (7.9) | 4.1 | 5.0 × 10 ¹³ |
| 5519 | | | | 20 (0.5) 40 (1.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=10-15 | 1.0 | 0.29 (1.9) 0.48 (3.1) | 11.1 | 1.7 × 10 ¹⁴ |
| 5519S* | | | | 60 (1.5) 80 (2.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=43 | 1.1 | 0.65 (4.2) 0.82 (5.3) | 13.5 | |
| 5591 | | | | 20 (0.5) 40 (1.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=50 | 1.6 | 1.14 (7.3) 1.92 (12.4) | 5.5 | 2.0 × 10 ¹² |
| 5591S* | | | | 60 (1.5) 80 (2.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=70 | 2 | 2.71 (17.5) 3.49 (22.5) | 7.9 | |
| 5592 | | | | 20 (0.5) 40 (1.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=61 | 3.0 | 0.64 (4.1) 1.15 (7.4) | 12.2 | 3.0 × 10 ¹² |
| 5592S* | | | | 60 (1.5) 80 (2.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=63 | 3.0 | 1.66 (10.7) 2.43 (15.7) | 14.7 | |
| 5595 | | | | 20 (0.5) 40 (1.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=50 | 1.6 | 0.70 (4.5) 1.21 (7.8) | 13.1 | 5.0 × 10 ¹² |
| 5595S* | | | | 60 (1.5) 80 (2.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=50 | 1.6 | 1.71 (11.0) 2.22 (14.3) | 15.7 | |

| 3M™ Thermally Conductive Acrylic Interface Pads | | | | | | | | | |
|---|------------------------|---------|-----|--|--|--|--|------------------------|------------------------|
| 5570 | Filled Acrylic Polymer | Ceramic | PET | No added adhesive layer. Pad is tacky and conformable/// Shore 00=50 | 1.3 | 0.67 (4.3) 1.18 (7.6) 1.69 (10.9) 2.30 (14.9) | 20 | 2.9 × 10 ¹² | |
| 5571 | | | | 20 (0.5) 40 (1.0) 60 (1.5) 80 (2.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00 = 70 | 2 | 0.81 (5.2) 1.24 (8.0) 1.68 (10.8) 2.11 (13.6) | 23 | 3.3 × 10 ¹² |
| 5578H | | | | 20 (0.5) 40 (1.0) | No added adhesive layer. Pad is tacky and conformable/// Shore 00 = 70 | 3.5 | 0.81 (5.4) | 19 | 1.7 × 10 ¹² |
| 5589H | | | | 40 (1.0) 60 (1.5) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=48 | 2.0 | 1.33 (8.6) 1.67 (10.8) | 21 | 3.4 × 10 ¹² |
| 5590H | | | | 20 (0.5) 40 (1.0) 60 (1.5) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=61 | 3.0 | 0.46 (3.0) 0.70 (4.5) 0.95 (6.1) | 16 | 2.7 × 10 ¹² |
| 5567H | | | | 20 (0.5) 40 (1.0) 60 (1.5) | No added adhesive layer. Pad is tacky and conformable/// Shore 00=63 | 3.0 | 0.46 (3.0) 0.70 (4.5) 0.95 (6.1) | 16 | 2.7 × 10 ¹² |

*Pads ending with S have a polymeric film on one side to be used as a non-tacky surface for ease of reworking an assembly.
**3M tested in accordance with ASTM 05470 test method.
***Thermal impedance is measured with the test sample under a nominal 10 psi pressure to reflect a typical end use application.

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

Compression vs. Stress

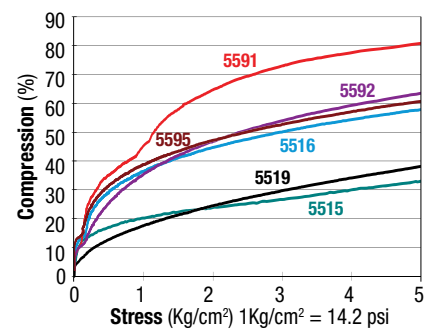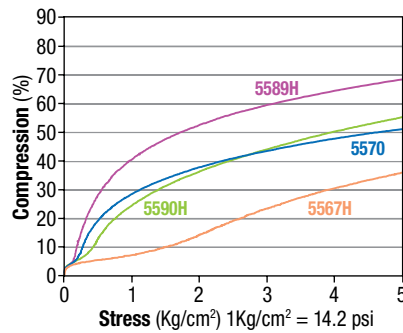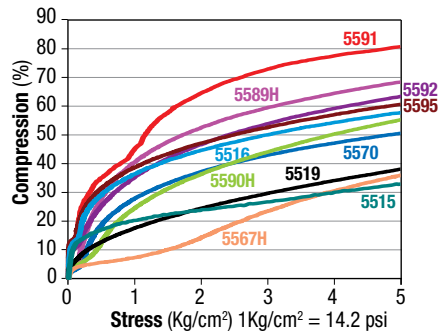

3M™ Thermally Conductive Interface Pads Selection Guide (Continued)

| Product | UL Flammability Rating | Potential Operating Temperature Range****(°C) | Typical Applications | Notes |
|---------|------------------------|---|----------------------|-------|
|---------|------------------------|---|----------------------|-------|

3M™ Thermally Conductive Silicone Interface Pads

| | | | | |
|-------|------------------|---|---|--|
| 5514 | UL 94 V-1 | Short Term (Hours-Days) 180-200°C Long Term (Weeks-Months) 150-160°C | 3M Pad 5514 is designed for applications requiring complicated shape, thin thickness (<0.25 mm) and good flexibility with over-bending. | Thermally conductive interface pads (silicone) for applications requiring gap filling and superior thermal performance without bonding. Provides IC package and PCB thermal interfacing with heat sinks or other cooling device, and metal cases. “S” designation signifies a polyester (PET) or a PEN film on one side to provide a non-tacky surface. “H” designation signifies a product with one non-tacky surface without the use of a PET film. ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL. |
| 5515 | UL 94 V-0 | | 3M Pad 5515 is designed for applications requiring higher K(3 w/m-k) and thin thickness (<0.25 mm). | |
| 5515S | Not Applicable | | 3M Pad 5515S is Thermal Pad 5515 with a permanent polyimide film on one side to be used as a non-tacky surface for anti-abrusion and ease of reworking on assembly. Thermal conductivity and thermal impedance are slightly changed with addition of thin polyimide film. | |
| 5516 | UL 94 V-0 | | 1) 3M Pad 5516S is Thermal Pad 5516 with a polymeric permanent film on one side to be used as a non-tacky surface for ease of reworking an assembly. Thermal conductivity and thermal impedance are slightly changed with addition of the film, while Dielectric strength is improved. 2) Optional thickness > 2.0 mm are available. | |
| 5516S | UL 94 V-1 or V-0 | | | |
| 5517 | – | | 3M Pad 5517 is a highly conformable, slightly tacky silicone elastomer flexible to fit to the shape. | |
| 5519 | UL 94 V-0 | | 1) 3M Pad 5519S is Thermal Pad 5519 with a polymeric permanent film on one side to be used as a non-tacky surface for ease of reworking an assembly. Thermal conductivity and thermal impedance are slightly changed with addition of the film, while Dielectric strength is improved. 2) Optional thickness > 2.0 mm are available. | |
| 5519S | | | | |
| 5591 | Not Applicable | | 1) 3M Pad 5591S has a polymeric permanent film on one side to be used as a non-tacky surface for ease of reworking an assembly. 2) 3M Pad 5591S is available in 0.5 mm -2.0 mm thickness . 3) Optional thickness > 2.0 mm are available. | |
| 5591S | UL 94 V-1 or V-0 | | | |
| 5592 | UL 94 V-1 or V-0 | 1) 3M Pad 5592S is Thermal Pad 5592 with a polymeric film on one side to be used as a non-tacky surface for ease of reworking and assembly. Thermal conductivity and thermal impedance are slightly changed with addition of the film, while dielectric strength is improved. 2) 3M Pad 5592S is available in the 0.5 mm-2.0mm thickness. 3M Pad 5592 1.0-2.0 mm thickness 3) Optional thicknesses > 2.0 mm are available. | | |
| 5592S | | | | |
| 5595 | UL 94 V-0 | 1) 3M Pad 5595S is Thermal Pad 5595 with a polymeric film on one side to be used as a non-tacky surface for ease of reworking and assembly. Thermal conductivity and thermal impedance are slightly changed with addition of the film, while dielectric strength is improved. 2) 3M Pad 5595S is available in the 0.5 mm-2.0 mm thickness. 3M Pad 5595 1.0-2.0 mm thickness 3) Optional thicknesses > 2.0 mm are available. | | |
| 5595S | | | | |

3M™ Thermally Conductive Acrylic Interface Pads

| | | | | |
|-------|-----------|--|--|--|
| 5570 | UL 94 V-0 | Short Term (Hours-Days) 110-130°C Long Term (Weeks-Months) 90-100°C | 3M Pad 5570 has good recovery and a medium tack surface for both sides and uses an acrylic elastomer for applications that require a non-silicone thermal pad. | ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL. |
| 5571 | | | 3M Pad 5571 has good recovery and a medium tack surface for both sides and uses an acrylic elastomer for applications that require a non-silicone thermal pad. | |
| 5578H | | | 3M Pad 5578H has good recovery, a low tack surface and a very low tack surface, and uses an acrylic elastomer for applications that require a non-silicone thermal pad. | |
| 5589H | | | 3M Pad 5589H has a very low tack surface and a medium tack surface and uses an acrylic elastomer for applications that require a non-silicone thermal pad. | |
| 5590H | | | 3M Pad 5590H has a very low tack surface and a medium tack surface and uses an acrylic elastomer for applications that require a non-silicone thermal pad. | |
| 5567H | | | 3M Pad 5567H has low odor, a very low tack surface and a medium tack surface on soft layer and uses an acrylic elastomer for applications that require a non-silicone thermal pad. | |

**** End use application testing will determine final temperature range based on final design and other environmental conditions. Suggested temperature range is based on a UL-746 Test Method or a 3M Test Method.


Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

3M™ Thermally Conductive Epoxies

This range of liquid adhesives has less odor and good structural strength adhesion. Dispensing is easy for high output, in-line automated manufacturing and manual application. Adhesive flows and fills micro-spaces on surfaces. Ultra-thin bond line helps achieve low thermal impedance.

3M™ Thermally Conductive Epoxies Selection Guide

| Product | Description | | | Thermal Performance | Dielectric Properties | | Potential Operating Temperature Range* (°C) | Typical Applications | Notes |
|---------|--------------------|------------------------------|-------------|---------------------|--------------------------------------|--|---|----------------------|-------|
| | Base Material Type | Product Thickness (mil) (mm) | Filler Type | Packaging | Conductivity (W/m-K 3M-ASTM 054701M) | Impedance (°C-in ² /MW ² /°C-cm ² /W) 2.0 mil (50µm) bondline thickness | | | |

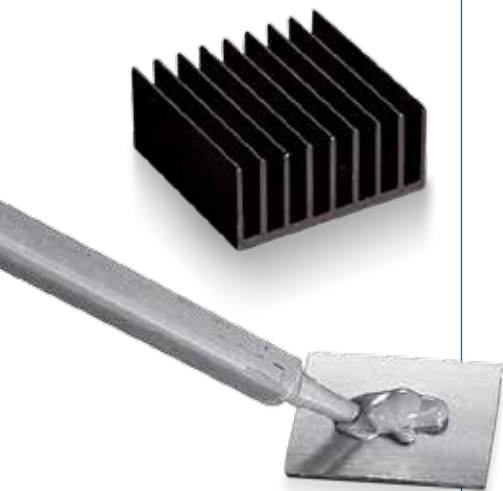

3M™ Thermally Conductive Epoxies

| | | | | | | | | | |
|---------|--------------|---------|----------------|-------------------------|---------|--------------|-----|------------------------|---|
| TC-2707 | Filled Epoxy | Various | Aluminum Metal | 2-part Epoxy/3M Duo-Pak | 0.72 | 0.105 (0.67) | 2.1 | 2.4 × 10 ¹¹ | <p>As the 3M™ Thermally Conductive Adhesive TC-2707 uses aluminum metal fillers, under certain end use application conditions the effective resistivity and/or effective dielectric strength could be significantly lower than noted. If the metal fillers are "trapped" or "pinched" between two surfaces, an electrical bridge path via the aluminum fillers could occur between these surfaces. Epoxy Adhesive TC-2707 is not suggested for applications where a powered electrical circuit is used or where a reliable volume resistivity and/or dielectric strength is desired. 3M™ Thermally Conductive Epoxy Adhesive TC-2810 uses ceramic filler and is suggested product to test for these types of application performance needs.</p> <p>Thermal Conductivity (TC) can vary in an application as the filler is a boron nitride (BN) platelet shape and alignment can change effective TC.</p> |
| TC-2810 | | | Ceramic | | 1.0-1.4 | 0.05 (0.32) | 3 | 76 × 10 ¹² | |

* End use application testing will determine final temperature range based on final design and other environmental conditions. Suggested temperature range is based on a UL-746 Test Method or a 3M Test Method.

3M™ EPX Applicator and Nozzle simultaneously and accurately mixes, meters, and applies adhesive with a squeeze of the trigger



Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

The 3M™ Thermally Conductive Greases are high performance thermal interface materials for transferring thermal energy from a heat source (e.g. processor chip, graphics chip, High Power LED) to a heat sink. The proprietary blend of inorganic fillers contained in an organic matrix (non-silicone) ensures high thermal conductivity and low thermal resistance. Grease products are available in two versions: Standard viscosity and a lower viscosity version that can be useful in screen printing application methods.


3M™ Thermally Conductive Greases

3M™ Thermally Conductive Greases Selection Guide

| Product | Description | | | Thermal Performance | | Dielectric Properties | | Potential Operating Temperature Range* (°C) | Typical Applications | Notes |
|-----------------------|-------------------------------|----------------------------|-------------|--|-----------------------------|---|---|---|---|--|
| | Base Material Type | Product Thickness (mil/mm) | Filler Type | Steady State Shear Viscosity @ 1.0 Shear/Rate (05470 TM) | Conductivity (W/m-K3M-ASTM) | Impedance (°C-in ² /W (°C-cm ² /W)) | Dielectric Strength (KV/mm (Film version tested)) | | | |
| TCG-2035/ TCG-2031 | Non-Silicone Polymeric Binder | Various | Ceramic | 2100/150 | 4.1 | 0.0127 (0.81) | 4.7 | 1.36 x 10 ⁸ | Short Term (Hours-Days) 125-150°C Long Term (Weeks-Months) 100-125°C | Thermally conductive greases provide a thin thermal interface to optimize thermal heat transfer between hot running devices and heat sinking surfaces. Excellent flow properties for improved interface wet-out. 3M Greases TCG-2031 and TCG-2033 are supplied with a small wt% of a solvent added to lower viscosity. Lower viscosity can allow for reduced thickness during application and may benefit screen printing options. Effective thermal measurements are not significantly different from non-solvent added versions. Shear rate viscosity reduced by 5-10x. |

* End use application testing will determine final temperature range based on final design and other environmental conditions. Suggested temperature range is based on a UL-746 Test Method or a 3M Test Method.

3M™ Thermal Grease

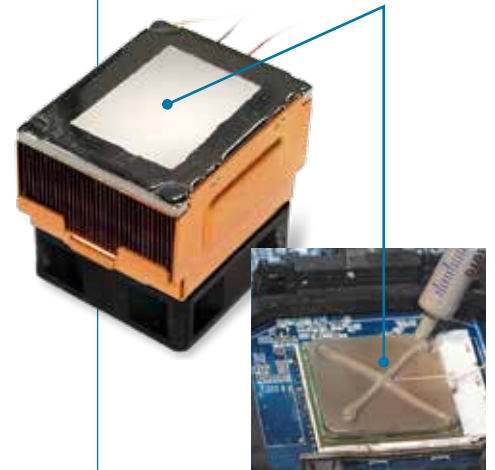

Note: The technical information and data on these pages should be considered representative or typical only and should not be used for specification purposes.

Technical Information: The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer: Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**Electronics Materials
Solutions Division**

3M Center, Building 224-3N-11
St. Paul, MN 55144-1000
www.3M.com/electronics
1-800-251-8634

Please recycle. Printed in USA.
© 3M 2015. All rights reserved.
Issued: 7/15 10776HB
78-9236-7060-4

3M and VHB are trademarks of
3M Company. Used under license
by 3M subsidiaries and affiliates.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[3M:](#)

[5590H](#)