

Click here to display the contents.

Click here to download the PDF file.



Operation can be made from the toolbar at the center of the lower portion of the screen.

Nozzles for Blowing

Series KN




Nozzle with self-align fitting/KN

(mm)



Model	Nozzle size øD	Applicable tubing O.D.	Width across flats		L ₁	M	Weight (g)
			H ₁	H ₂			
KN-04-100	ø1	ø4	10	10	27	15	13
KN-04-150	ø1.5	ø4	10	10	27.7	15	14
KN-06-100	ø1	ø6	12	12	30.1	16	19
KN-06-150	ø1.5	ø6	12	12	30.8	16	20
KN-06-200	ø2	ø6	12	12	31.5	16	22
KN-08-150	ø1.5	ø8	14	14	33.8	16	28
KN-08-200	ø2	ø8	14	14	34.6	16	30
KN-10-250	ø2.5	ø10	14	17	35.6	17	35
KN-10-300	ø3	ø10	14	17	36.3	17	36
KN-10-350	ø3.5	ø10	14	17	37.1	17	37
KN-10-400	ø4	ø10	14	17	29.5	17	30
KN-10-600	ø6	ø10	14	17	27.7	17	28
KN-12-350	ø3.5	ø12	17	19	40.4	17	54
KN-12-400	ø4	ø12	17	19	41.3	17	55
KN-12-600	ø6	ø12	17	19	31.2	17	40
KN-16-400	ø4	ø16	22	24	40.1	17	77
KN-16-600	ø6	ø16	22	24	38.4	17	79
KN-20-400	ø4	ø20	26	27	45.6	17	117
KN-20-600	ø6	ø20	26	27	43.9	17	112




Nozzle with male thread/KN

(mm)



Model	Nozzle size øD	Connection thread	Width across flats		L ₁	A*	Weight (g)
			H ₁	H ₂			
KN-R01-100	ø1	R 1/8	10	21.4	17.4	8	
KN-R01-150	ø1.5	R 1/8	10	21	17	8	
KN-R02-100	ø1	R 1/4	14	31.4	25.4	19	
KN-R02-150	ø1.5	R 1/4	14	31	25	20	
KN-R02-200	ø2	R 1/4	14	30.5	24.5	21	
KN-R02-250	ø2.5	R 1/4	14	30.1	24.1	21	
KN-R02-600	ø6	R 1/4	14	27.1	21.1	22	
KN-R03-400	ø4	R 3/8	17	31.8	25.4	36	
KN-R03-600	ø6	R 3/8	17	30.1	23.7	37	
KN-R04-400	ø4	R 1/2	22	41.8	33.6	75	
KN-R04-600	ø6	R 1/2	22	40.1	31.8	76	
KN-R06-600	ø6	R 3/4	27	49.6	40.1	149	
KN-R06-800	ø8	R 3/4	27	47.8	38	152	
KN-R10-800	ø8	R 1	36	62.8	52.4	328	

* Reference dimensions after R thread installation.




Copper extension nozzle/KNL

(mm)



Model	Nozzle size øD	Outside diameter	L ₁	Weight (g)
KNL3-06-150	ø1.5	ø6	300	43
KNL3-06-200	ø2	ø6	300	43
KNL3-08-200	ø2	ø8	300	61
KNL3-08-250	ø2.5	ø8	300	61
KNL3-10-250	ø2.5	ø10	300	94
KNL3-10-300	ø3	ø10	300	94
KNL6-06-150	ø1.5	ø6	600	84
KNL6-06-200	ø2	ø6	600	84
KNL6-08-200	ø2	ø8	600	117
KNL6-08-250	ø2.5	ø8	600	117
KNL6-10-250	ø2.5	ø10	600	183
KNL6-10-300	ø3	ø10	600	183




Nozzle for One-touch fitting/KN

(mm)



Connecting products with metal rods
Products with metal rods cannot be connected to Series KQ2 One-touch fittings. If connected, the metal rod cannot be retained by the chuck of the One-touch fitting and products with metal rods may project during pressurization, causing serious personal injury or accident.
For details about One-touch fittings that can connect products with metal rods, contact SMC.

Model	Nozzle size øD	Applicable fitting size ød	L ₁	A	Weight (g)
KN-Q06-100	ø1	ø6	35	18	5
KN-Q06-150	ø1.5	ø6	35	18	5
KN-Q06-200	ø2	ø6	35	18	5
KN-Q08-150	ø1.5	ø8	39	20.5	9
KN-Q08-200	ø2	ø8	39	20.5	9
KN-Q10-200	ø2	ø10	43	22	16
KN-Q10-250	ø2.5	ø10	43	22	16
KN-Q12-250	ø2.5	ø12	45.5	24	23
KN-Q12-300	ø3	ø12	45.5	24	23




Pivoting nozzle with self-align fitting/KNK

(mm)



Model	Nozzle size øD	Applicable tubing O.D.	Width across flats		L ₁	M	Weight (g)
			H ₁	H ₂			
KNK-10-400	ø4	ø10	17	17	41.7	17	44
KNK-10-600	ø6	ø10	17	17	41.7	17	44
KNK-12-400	ø4	ø12	17	19	41.2	17	44
KNK-12-600	ø6	ø12	17	19	41.2	17	44
KNK-16-400	ø4	ø16	17	24	41.8	17	64
KNK-16-600	ø6	ø16	17	24	41.8	17	64
KNK-20-400	ø4	ø20	17	27	43.8	17	77
KNK-20-600	ø6	ø20	17	27	43.8	17	77




Pivoting nozzle with male thread/KNK

(mm)



Model	Nozzle size øD	Connection thread	Width across flats		L ₁	A*	Weight (g)
			H ₁	H ₂			
KNK-R02-400	ø4	R 1/4	17	17	38	31.9	32
KNK-R02-600	ø6	R 1/4	17	17	38	31.9	32
KNK-R03-400	ø4	R 3/8	17	17	39	32.4	40
KNK-R03-600	ø6	R 3/8	17	17	39	32.4	40
KNK-R04-400	ø4	R 1/2	17	22	42.2	34.1	54
KNK-R04-600	ø6	R 1/2	17	22	42.2	34.1	54

* Reference dimensions after R thread installation.



High efficiency nozzle/KNH


(mm)



The air blow thrust is improved by 10%.

Model	Nozzle size øD	Connection thread	Width across flats		L ₁	A*	Weight (g)
			H ₁	H ₂			
KNH-R02-100	ø1	R 1/4	14	14	52	46	38
KNH-R02-150	ø1.5	R 1/4	14	14	52	46	38
KNH-R02-200	ø2	R 1/4	14	14	52	46	38

* Reference dimensions after R thread installation.




Low noise nozzle with self-align fitting/KNS

(mm)



Model	Nozzle size øD	Applicable tubing O.D.	Width across flats		L ₁	M	Weight (g)
			H ₁	H ₂			
KNS-08-075-4	ø0.75 x 4	ø8	12	14	24.3	16	17
KNS-08-100-4	ø1 x 4	ø8	12	14	24.3	16	17
KNS-10-075-4	ø0.75 x 4	ø10	14	17	24	17	24
KNS-10-090-8	ø0.9 x 8	ø10	14	17	24	17	24
KNS-10-100-4	ø1 x 4	ø10	14	17	24	17	24




Low noise nozzle with male thread/KNS

(mm)



Model	Nozzle size øD	Connection thread	Width across flats		L ₁	A*	Weight (g)
			H ₁	H ₂			
KNS-R01-075-4	ø0.75 x 4	R 1/8	12	18	14	9	9
KNS-R01-100-4	ø1 x 4	R 1/8	12	18	14	9	9
KNS-R01-090-8	ø0.9 x 8	R 1/8	12	18	14	9	9
KNS-R02-075-4	ø0.75 x 4	R 1/4	14	20	14	13	13
KNS-R02-090-8	ø0.9 x 8	R 1/4	14	20	14	13	13
KNS-R02-100-4	ø1 x 4	R 1/4	14	20	14	13	13
KNS-R02-110-8	ø1.1 x 8	R 1/4	14	20	14	13	13

* Reference dimensions after R thread installation.




Sensing Heads

Standard sensing head/KNP



Model	Nozzle size øD	Applicable tubing O.D.	Width across flats		M	L ₁	L ₂	Weight (g)
			H ₁	H ₂				
KNP-1	ø2.5	ø4	5	8	12.7	63.7	987.3	7

* A 1 m polyurethane tube is included.




Needle sensing head/KNP




Model	Nozzle size øD	Applicable tubing O.D.	Cassette size H ₁	M	L ₁	L ₂	L ₃	Weight (g)

* A 1 m polyurethane tube is included.



Use to measure workpiece collision pressure.

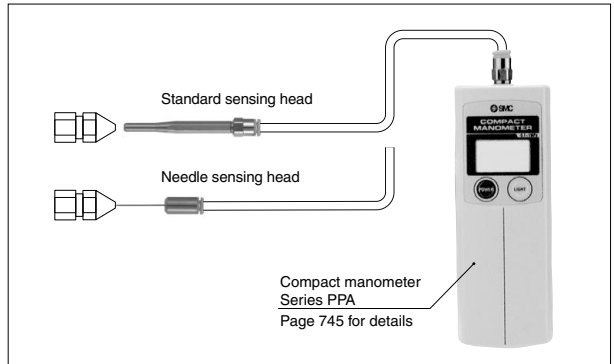

Principal Parts Material

KN, KNK, KNH, KNS

Body, nut	C3604
Sleeve (Self-align fitting type)	C2700
Nozzle (Pivoting type)	Stainless steel 303

KNL

Pipe	C1220T-0
Nozzle	C3604

KNP-1

Pressure spindle	Stainless steel 303
One-touch fittings	POM, NBR, Stainless steel 303, Stainless steel 304
Polyurethane tube (ø4, 1 m)	Polyurethane

KNP-2

Pipe	Stainless steel 304
One-touch fittings	POM, NBR, Stainless steel 304
Polyurethane tube (ø4, 1 m)	Polyurethane

Specifications

Nozzle (KN, KNK, KNH, KNS, KNL)

Applicable tubing material	Nylon, Soft nylon, Flexible copper pipe (C1220T-O), OST pipe	
Applicable tubing O.D.	ø4, ø6, ø8, ø10, ø12, ø16, ø20	
Fluid	Air, Coolant	
Maximum operating pressure	1 MPa (0.3 MPa with OST pipe)	
Ambient and fluid temperature	-5 to 60°C (No freezing)	
Threads	Mounting	JISB0203 (taper threads for piping)
	Nut	JISB0205 (Metric fine thread)
Seal on the threads	None	
Copper-free (Standard)	Brass parts are all electroless nickel plated.	

Sensing head (KNP)

Applicable tubing O.D.	ø4
Fluid	Air
Maximum operating pressure (at 20°C)	0.8 MPa
Ambient and fluid temperature	-5 to 60°C (No freezing)

VMG

KN