REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.11	阿树

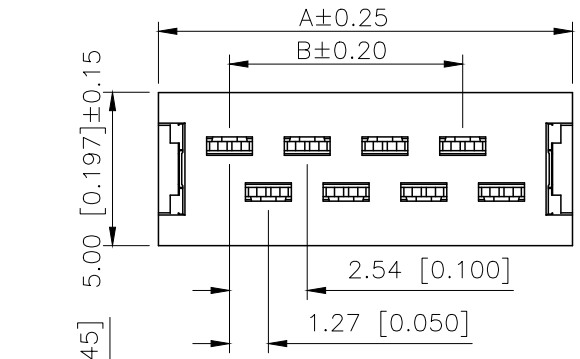

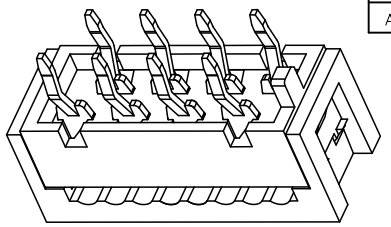

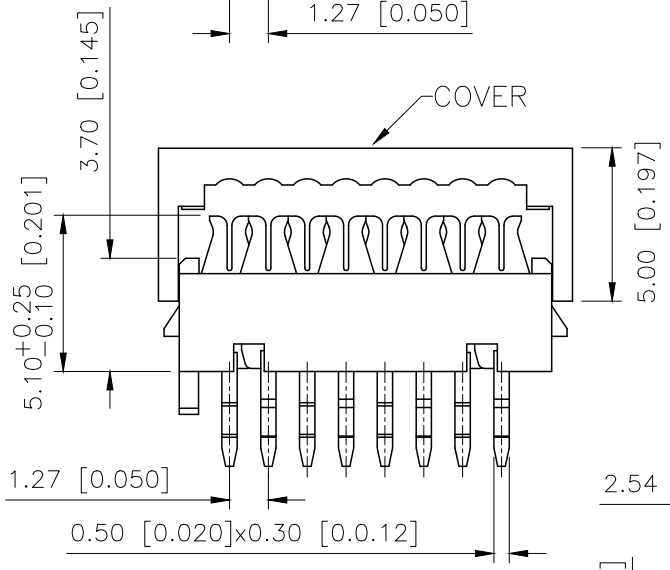

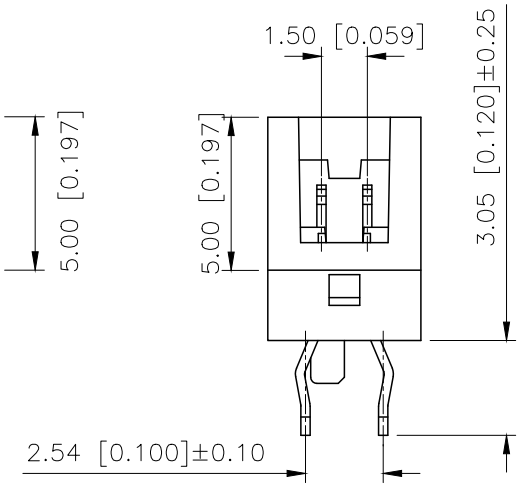



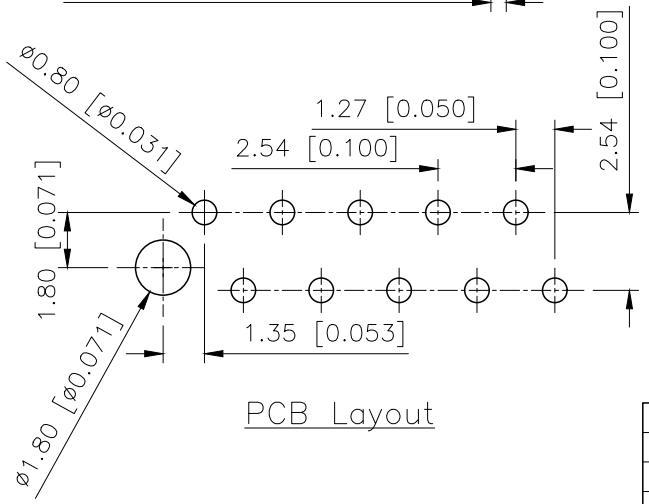

PCB Layout

PART NO.:

X9127 H I−XX A−PT XX
① ② ③ ④ ⑤ ⑥

①Series No
②Category:H−HSG
③Welding Board Angle:I−HSG+handware
④Row No−Pin No:XX−04P~26P
⑤Plug the Pin & Special No.:A−Double Deflcency
Material:PT−PBT UL94V−0
⑥Color: RD−purplish red
RE−Red Color

■SPECIFICATIONS
•Voltage rating:500V AC/DC
•Current rating:1A AC/DC
•Withstanding Voltage:1000V AC/minute
•Temperature range:−40°C~+125°C
•Insulation resistance:≥1000MΩ
•Contact resistance: ≤20mΩ
•After environment testing: ≤30mΩ

Poles	Dimensions(mm)	
	A	B
04	8.45	2.54
06	10.99	5.08
08	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.40
24	33.85	27.94
26	36.39	30.48

PART NO	Color	Material	Material(Pin)	Finish(Pin)
X9127HI−XXA−PTRE	Red	PBT UL 94V−0	Brass	Tin−Plated
X9127HI−XXA−PTRD	purplish red			

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection

DESIGN	阿树	VIEW:	MODEL TYPE: 1.27mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X9127HI−XXA−PTXX
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1