

RECOMMENDED P.C.B LAYOUT  
PCB THICKNESS=0.60MM(TOLERANCE=±0.05)

XKB Connectivity

XKB Connectivity

1. 材料规格 MATERIAL SPECIFICATION:

- 1) 胶壳 HOUSING: WHITE PBT UL94V-0.
- 2) 外壳 SHELL: SPCC T=0.30mm
- 4) 接点 CONTACT: C5191 T=0.25mm

2. 电镀 PLATING:



- 1) 接点 CONTACT :  
G/F GOLD PLATING ON CONTACT AREA  
80~100u".Bright Tin PLATING ON SOLDER TAILS  
50u"Min.Nickel UNDERPLATING OVER ALL
- 2) 外壳 SHELL: 50u"Min.Nickel Underplated Over All

3. 电气特性 ELECTRICAL CHARACTERISTIC:

- 1) 电压电流额定值 VOLTAGE CURRENT RATING: 1AMP,30V DC;
- 2) 绝缘电阻 INSULATION RESISTANCE: 1000MΩ,MIN;
- 3) 接触电阻 CONTACT RESISTANCE: 30mΩ,MAX;
- 4) 耐压 WITHSTANDING VOLTAGE: 500V AC;

4. 机器特性 MACHINE CHARACTERISTICS:


- 1) 插入力 MATING FORCE:3.57 KG MAX
- 2) 拔出力 UNMATING FORCE:1.02 KG MIN.

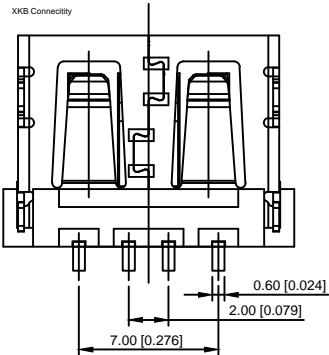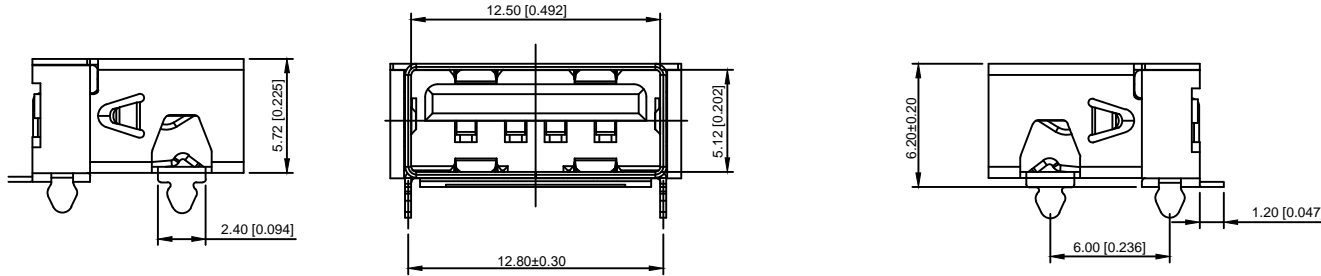

XKB Connectivity

XKB Connectivity

# U221-04XN-1WVS62-F5D

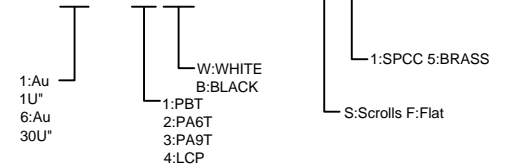

					DSND		DATE		SCALE: N/A	MODEL TYPE: USB 2.0		
					ΔX		DATE		VIEW:	PART NO.:		
					ΔX		DATE		UNIT: mm/in	DWG NO.:		
					ΔX		DATE		SIZE: A4	U221-04XN-1WVS62-F5D		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES		DATE			WEIGHT	SHEET	REVISION
REVISIONS										1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					XKB INDUSTRIAL PRECISION CO.,LIMITED							