
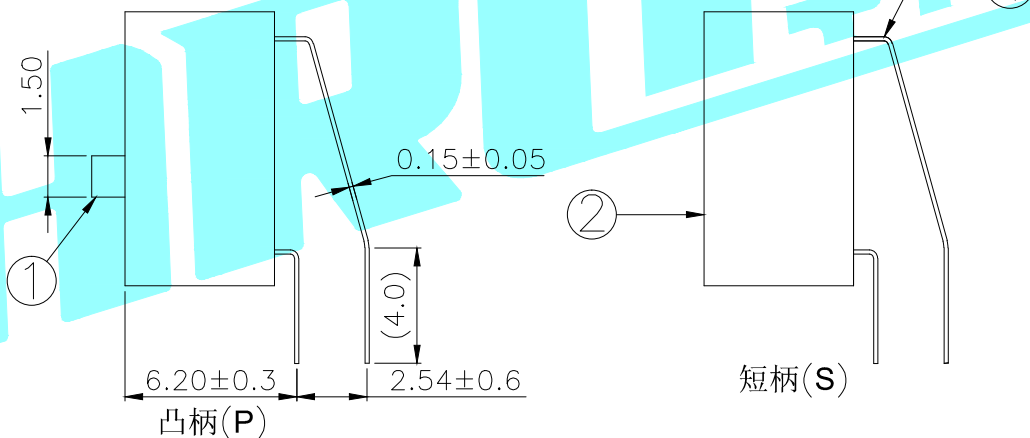
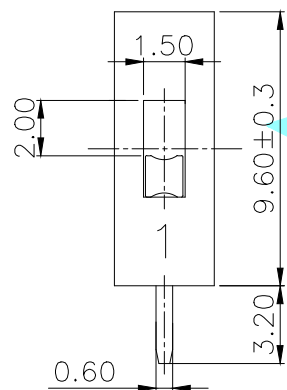
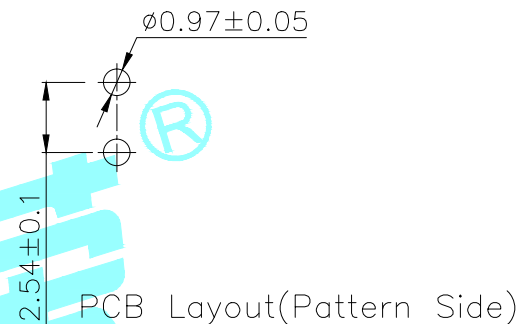



NOTE:

- 1.Rating: 24V 25mA DC
- 2.Insulation Resistance: $\geq 100 \text{ M}\Omega$
- 3.Withstand voltage: AC 500V 1Minute
- 4.Operating Force Range: 1000gf Max
- 5.Electrical Life: 2,000 Cycles
- 6.Operating Temperature range $-20^{\circ}\sim+70^{\circ}\text{C}$
- 7.Ambient Humidity used: $\leq 85\%RH$

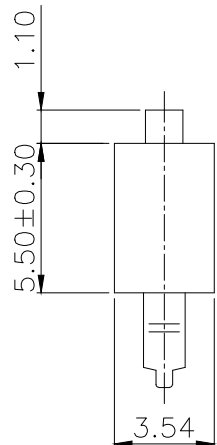

Position(位数)		1P
PART NO.	凸柄(P)	DA-01RP
盖子/红色(R)	短柄(S)	DA-01RS
PART NO.	凸柄(P)	DA-01BP
盖子/蓝色(B)	短柄(S)	DA-01BS

⑤	Gum Water	—		Epikote	Black	—
④	Terminal	—	2	Phosphor bronze	Au Plating	—
③	Base	—	1	PBT	Black	—
②	Cover	—	1	PBT	Red/Blue	—
①	Keystoke	—	1	PBT	White	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	HRO 韩荣® ELECTRONICS CO.,LTD			
DRAWN	LIUCAN	2021.3.19	TITLE:		MULTIFUNCTIONAL SWITCHES	
CHECKED			PART NO.		DA-□□□□	
APPROVALS			TOLERANCES ARE		ANGLE	
			30~以上	±0.30	±2'	UNIT: mm
			10~30	±0.20		
			5~10	±0.15		
			~ 5	±0.10	SCALE: 1:1	
DRAWING NO.		SHEET		1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—