


P/N	DC-038/A-A	DC-038/A-B
Schematic code		

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

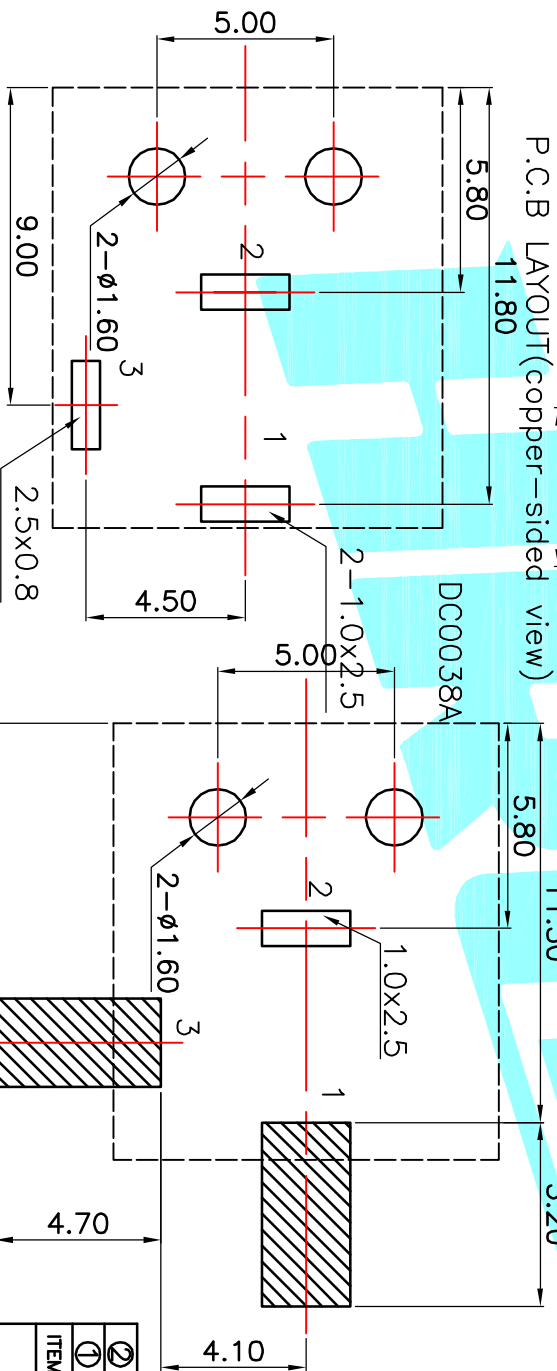

② Terminal	3	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERN.O.	QTY.
APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/11/11	
CHECKED		TITLE: PHONE JACKES	
APPROVALS		PART NO. DC-038	
TOLERANCES ARE		SCALE: 1:1	PROJ. SHEET 1 OF 1
30 <sup>±</sup> 0.15	±0.30	ANGLE	
10 <sup>±</sup> 0.10	±0.20	UNIT: mm	
5 <sup>±</sup> 0.10	±0.15	±Z	DRAWING NO.
~ 5	±0.10		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO.,LTD