



Circuit diagram

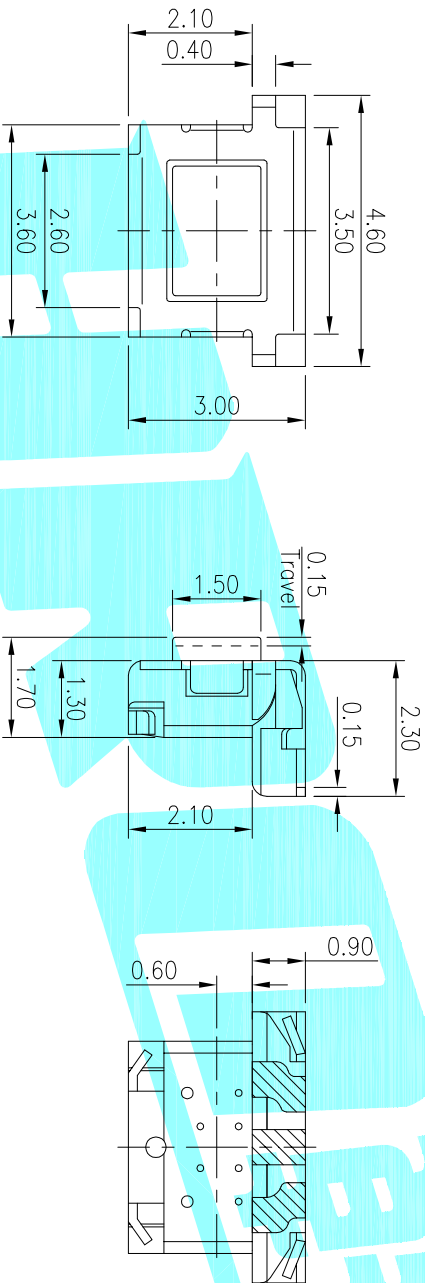

- Notes:
- 1.Rating: 12V DC 50mA
 - 2.Contact resistance: 100mΩ max
 - 3. Insulation resistance: 100MΩ 250v AC for 1min
 - 4.Dielectric strength: 250V AC(50/60hz) for 1min
 - 5.Life test:100,000 Cycles
 - 6.Travel:0.15±0.05mm

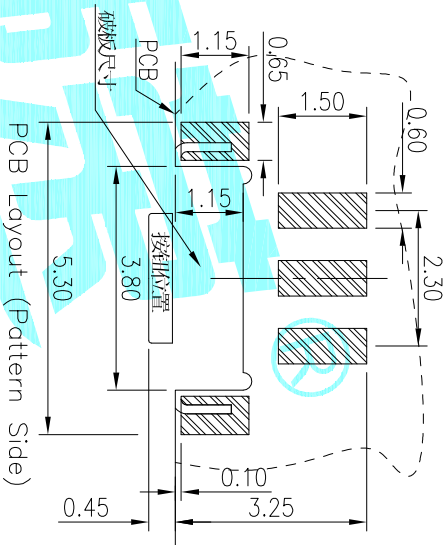

NO.1		NO.3-NO.4	
PART NO	vigor	PART NO	NOTE
1	90±30	01~99	SERIAL NUMBER
2	130±30		
3	180±30		
4	250±30		
5	350±50		

NO.2	
PART NO	MATERIAL/QTY
S	SUS/1PC
D	SUS/2PCS

⑤	Terminal	—	3	Phosphor Bronze	Plating silver	—
④	Contact	—	1	SUS	Plating silver	—
③	Base	—	1	Nylon	Black	—
②	Cover	—	1	SUS	Natural	—
①	Keystoke	—	1	Nylon	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	TITLE:	
DRAWN JKUN.LU		2016/6/30	Tact Switch	
CHECKED			ELECTRONICS CO.,LTD	
APPROVALS			PART NO. K2-1847FT-A00A-00	
TOLERANCES ARE		30~以上 ±0.30	ANGLE	SCALE: 1:1
		10~30 ±0.20		PROJ: ①
		5~10 ±0.15		SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.
	A		NEW	CHECK.
				APPRO.