



02P~03P Shape
Scale1:1






X3535WR-XXC1
Without Kink,With Stand off

Specifications:


规格:
Voltage rating:125V AC/DC
额定电压: 125V AC/DC
Current rating:2A AC/DC
额定电流: 2A AC/DC
Withstanding voltage:100V AC/minute
耐受电压: 100V AC/分钟
Temperature range:-40℃~+105℃
温度范围: -40℃~+105℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤20mΩ
接触电阻: ≤20mΩ

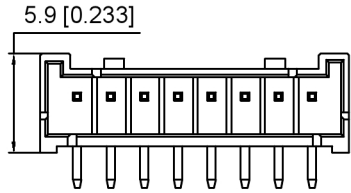


04P~20P Shape
Scale1:1

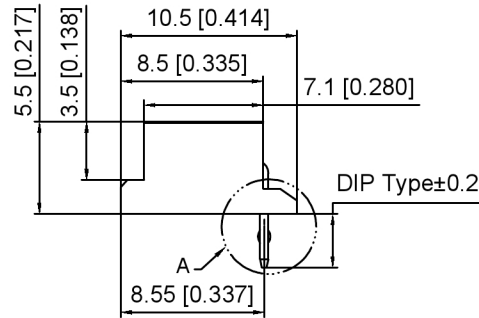


04P~15P Shape
Scale1:1

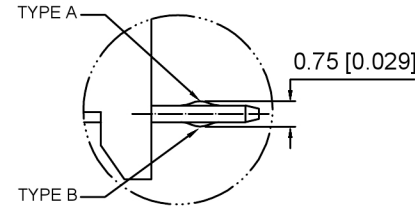

DETAIL A
SECALE2:1



02P~04P Shape
Scale1:1



Recommended PCB Layout

X3535 W R - XX X - N0 SN
① ② ③ ④ ⑤ ⑥ ⑦

- Series No
- Category:W-Wafer
- Welding Board Angle:R-Stright 90°
- Row No,Pin No:XX-02~16P
- DIP TYPE:
A-DIP=3.2mm,With Kink
B-DIP=2.5mm,With Kink
C-DIP=2.1mm,Without Kink
C1-DIP=2.1mm,Without Kink,With Stand off
D-DIP=3.0mm,With Kink
- Material:N0-PA66 ; 9T-PA9T UL94V-0
- Plating:SN-Bright Tin Plated ; SW-Matte Tin Plated

poles	Dimensions(mm)			poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	7.70	5.30	09	16.20	20.50	19.60
03	4.00	9.70	7.30	10	18.20	22.50	21.60
04	6.00	10.30	9.30	11	20.20	24.60	23.60
05	8.00	12.30	11.30	12	22.20	26.60	25.70
06	10.00	14.30	13.30	13	24.20	28.70	27.70
07	12.10	16.30	15.50	14	26.20	30.70	29.70
08	14.10	18.30	17.50	15	28.30	32.80	31.60

With K to Choose the type(A Or B)

PIN NO	1	2	3	4	5	6	N-2	N-1	N
6PIN Over	-	A	B	-	-	-	B	A	-
6PIN	-	A	B	B	A	-	-	-	-
5PIN	A	B	-	B	A	-	-	-	-
4PIN	A	B	B	A	-	-	-	-	-
3PIN	A	B	A	-	-	-	-	-	-
2PIN	A	B	-	-	-	-	-	-	-

DIP DIM	PART NO	Material	Material(pin)	Suitable XKB Housing
A-DIP=3.20	X3535WR-XXA-N0SN	PA66 UL 94V-0	Brass	X3535H
B-DIP=2.50	X3535WR-XXB-N0SN			
C-DIP=2.10	X3535WR-XXC-N0SN			
C1-DIP=2.1	X3535WR-XXC1-N0SN			
D-DIP=3.0	X3535WR-XXD-N0SN			

DSND	SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN	VIEW:	PART NO.:
CHKD	UNIT: mm/in	X3535WR-XXX-N0SN
APPD	SIZE: A4	DWG NO.:
		X-X3535WR-XXX-N0SN



XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0

广东星坤科技股份有限公司
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
Δ*	日期			
Δ*				
Δ*				

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5