


SCALE: 1:1

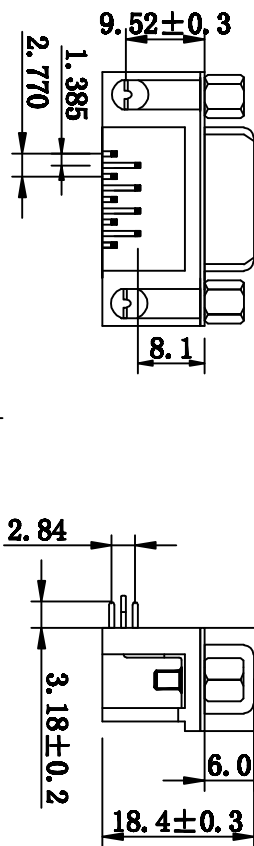

P.C.B LAYOUT

MATERIAL & FINISHES
 INSULATOR - PBT GLASS FIBER UL94V-0
 CONTACT- BRASS
 SHELL - STEEL
 PLATING - CONTACT GOLD FLASH PLATED

ELECTRICAL CHARACTERISTICS
 RATING CURRENT : 3A
 CONTACT RESISTANCE : <15mΩ
 INSULATION RESISTANCE : <3000MΩ AC 500V
 DIELECTRIC VOLTAGE : 1000V /MIN
 OPERATING TEMPERATURE : -50° C TO+105° C

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:
CHECKED:	DATE:
DRAWN:	DATE:
Juli-Liu	2015-04-25

<p>客户: 深圳市灿科盟实业有限公司 CLIENT P/N: DMR009PPR003QT00</p>	
UNIT: mm	SCALE: Free
FILE NO: Charly-DMR-0025	REV: A