


FEATURES

- Unshrouded Straight 3-way Pin Header
- 0.64 mm square pins
- Pitch of 2.54 mm
- Pin height of 7 mm
- Single row
- Straight body orientation (right-angled to the surface)
- Through hole mounting
- Solder termination method
- Brass contacts, with tin-plated finish
- Current rating of 1.0 A

RS PRO, 3 Way, 1 Row, Straight Pin Header

RS Stock No.: 251-8092

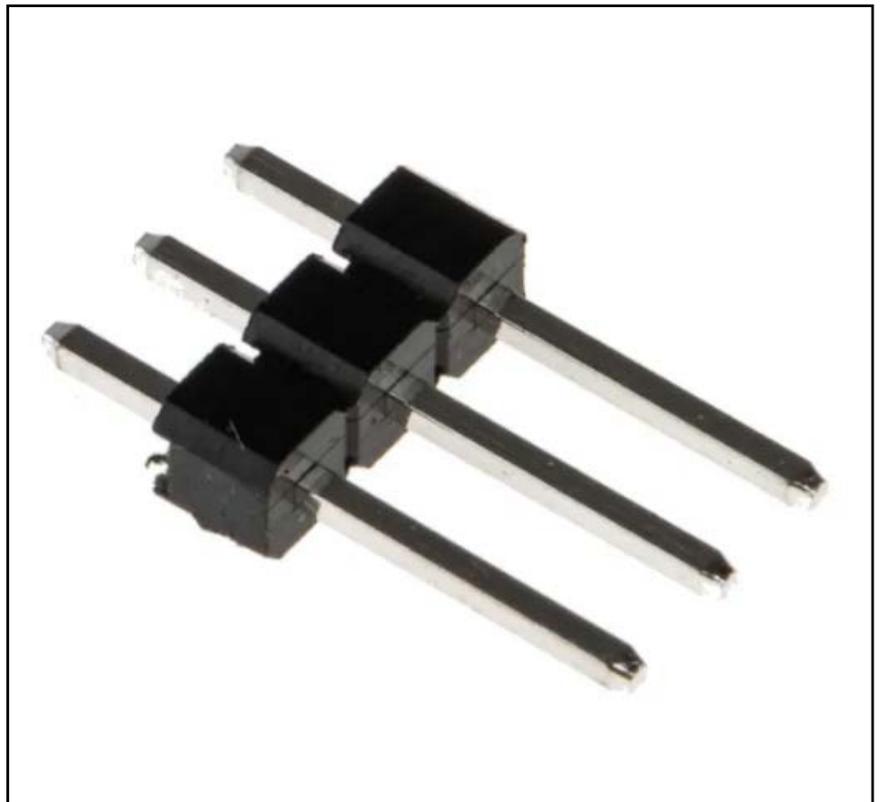

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This PCB pin header is a straightforward, time-saving way to connect two PCB (printed circuit board) units. No soldering or wiring is necessary, and you can easily separate the boards again if any problems arise. With a 2.54 mm pitch, the pin header can simply be snapped to achieve the desired length. It's unshrouded and features through-hole mounting and solder termination. This enables easier, more permanent connections. The contacts of the pin header are made from brass with a pure, bright tin plating to prevent oxidation, corrosion and degradation. The tin finish also means they have excellent surface flatness.

General Specifications

Number of Contacts	3
Number of Rows	1
Body Orientation	Straight
Shrouded/Unshrouded	Unshrouded
Termination Method	Solder
Contact Material	Brass
Contact Plating	Tin
Moulding Material	PBT
Flammability	UL94V-0
Colour	Black
Application	Wire wrap and board-to-board electronics applications, as well as programming.

Electrical Specifications

Current Rating	1.0A
-----------------------	------

Mechanical Specifications

Mounting Type	Through Hole
Pitch	2.54mm
pin diameter	0.64mm
pin height	7mm

Approvals

Compliance/Certifications	EN61340
----------------------------------	---------

