
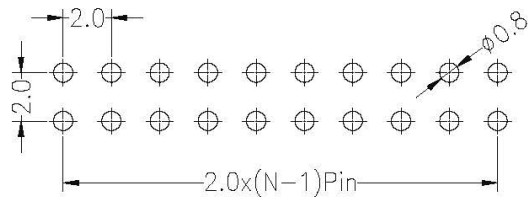

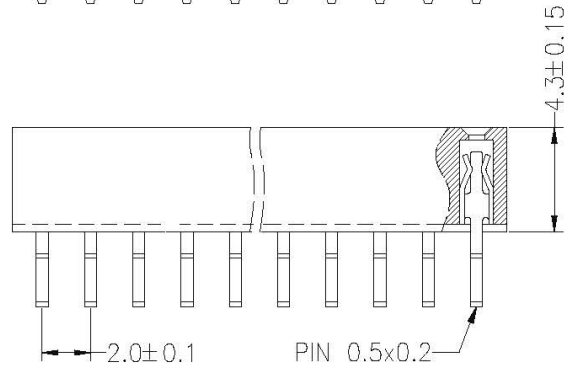


RoHS

版本 REV	变更内容 CHANGE CONTENT	版数 VERSION	变更日期 DATE
A0			

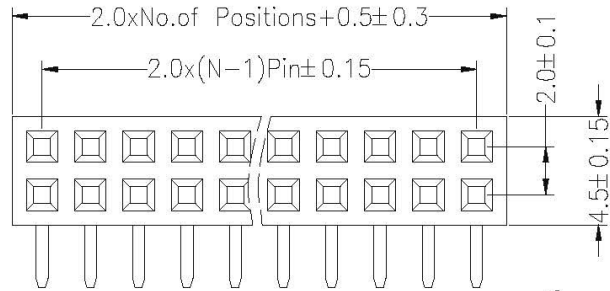

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

MATERIAL

- * Contact: Phosphor Bronze
- * Insulator: NYLON 6T & 30% G.F.
- * Plating: All Gold

SPECIFICATION

- * Current Rating: 1 A
- * Withstanding Voltage: 500 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -55°C to +105°C
- * Retention Force: 450g MIN.

		单位 UNIT	mm	深圳市泰华电子有限公司 TaiHua Electronics Co., Ltd		
比例 SCALE						
x. ±0.5	x. °±	核准: APPROVED BY		版本: A0	产品名称 Production name	PH2.0x4.3 双排母 90°
.x±0.30	.x °±	审核: CHECKED BY		页次: 1/1	产品料号 Product No	
.xx±0.20	.xx °±	制图: 封文辉 DRAWN BY		日期:	客户料号 Client No	
.xxx±0.005	.xxx °±					