
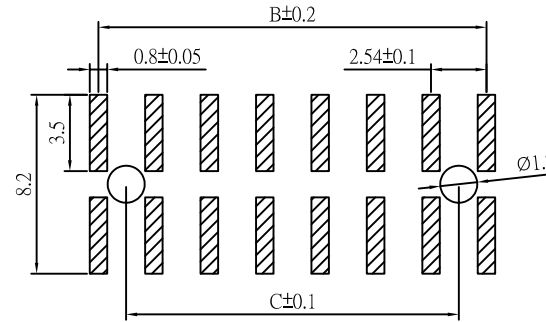

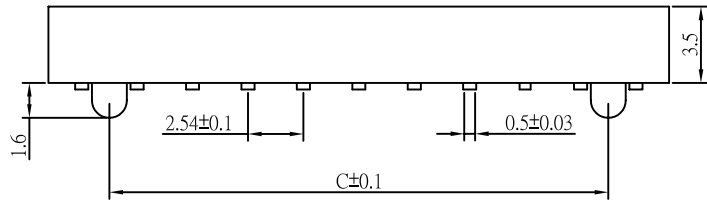


RoHS

版本 REV	变更事项 CHANGE CONTENT	依据 REFERENCE	变更日期 DATE
A0			

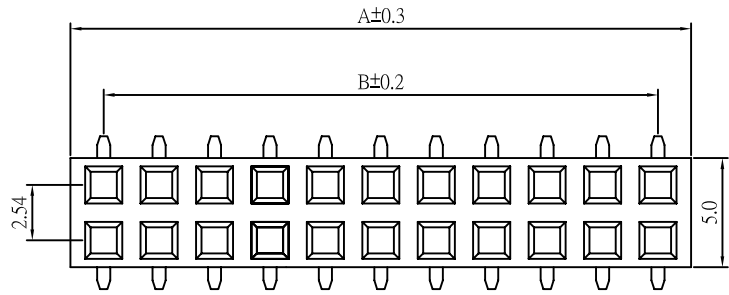

P.C.B LAYOUT

技术要求:  
Technical requirement

一. 电气性能:

electrical performance

1-1. 额定电流: 3A AC DC.

rated current: 3A AC DC.

1-2. 接触电阻: ≤20mΩ

Contact resistance: ≤20mΩ

1-3. 绝缘电阻: ≥1000MΩ

Insulation resistance: ≥1000MΩ

1-4. 耐压: 550V AC/Minute

withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics

2-1. 环境温度: -25℃~105℃

environmental temperature: -25℃~105℃

2-2. 焊接温度: +260℃, 10s max

welding temperature: +260℃, 10s max

三. 材质:

Material

3-1. 塑胶: PA6T(Black) UL94V-0

plastic: PA6T(Black) UL94V-0

3-2. 插针: 磷铜/镀金

pin: Phosphor Bronze/Gold plated

PIN	A	B	C
2x2A	5.58	2.54	/
2x3A	8.12	5.08	2.54
2x4A	10.66	7.62	5.08
2x5A	13.20	10.16	7.62
2x6A	15.74	12.70	10.16
2x7A	18.28	15.24	12.70
2x8A	20.82	17.78	15.24
2x9A	23.36	20.32	17.78
2x10A	25.90	22.86	20.32
2x11A	28.44	25.40	22.86
2x12A	30.98	27.94	25.40
2x13A	33.52	30.48	27.94
2x14A	36.06	33.02	30.48
2x15A	38.60	35.56	33.02
2x16A	41.14	38.10	35.56
2x17A	43.68	40.64	38.10
2x18A	46.22	43.18	40.64
2x19A	48.76	45.72	43.18
2x20A	51.30	48.26	45.72
2x21A	53.84	50.80	48.26
2x22A	56.38	53.34	50.80
2x23A	58.92	55.88	53.34
2x24A	61.46	58.42	55.88
2x25A	64.00	60.96	58.42
2x26A	66.54	63.50	60.96
2x27A	69.08	66.04	63.50
2x28A	71.62	68.58	66.04
2x29A	74.16	71.12	68.58
2x30A	76.70	73.66	71.12
2x31A	79.24	76.20	73.66
2x32A	81.78	78.74	76.20
2x33A	84.32	81.28	78.74
2x34A	86.86	83.82	81.28
2x35A	89.40	86.36	83.82
2x36A	91.94	88.90	86.36
2x37A	94.48	91.44	88.90
2x38A	97.02	93.98	91.44
2x39A	99.56	96.52	93.98
2x40A	102.10	99.06	96.52

3	包装	<input type="checkbox"/> 袋装 <input checked="" type="checkbox"/> 管装 <input type="checkbox"/> 卷装 <input type="checkbox"/> 盒装	1	PCS
2	塑胶	PH2.54*3.5 2*nP PA6T料 带内柱	1	PCS
1	端子	2.54X3.5 U型 SMT 磷铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUA'Y	UNIT

 单位 UNIT mm	比例 SCALE	泰华电子有限公司		
	核准: APPROVED BY	版本: A0	产品名称 Production name PH2.54x3.5mm 排母 G/F 立贴	
.x ± 0.5	x.* ±	审核: CHECKED BY	页次: 1/1	产品料号 Product No
.x ± 0.30	.x.* ±	制图: 吕灿东	日期:	客户料号 Client No
.xx ± 0.20	.xx.* ±	DRAWN BY		
.xxx ± 0.005	.xxx.* ±			

TaiHua Electronics Co., Ltd