
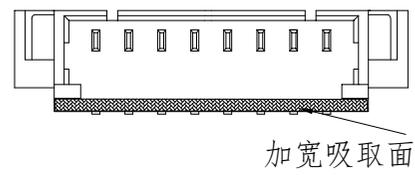
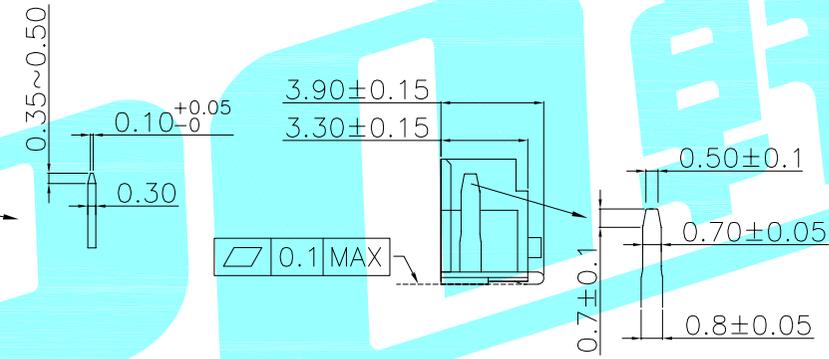
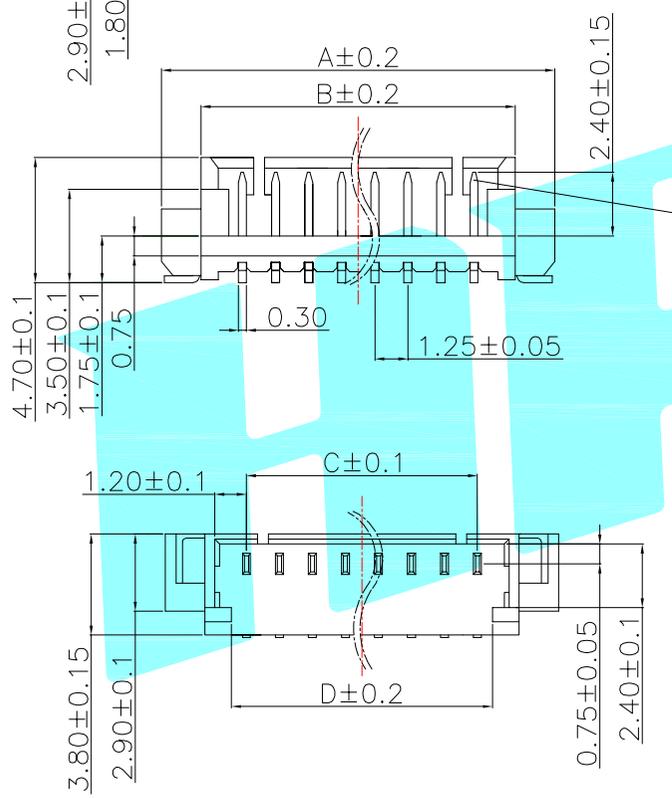
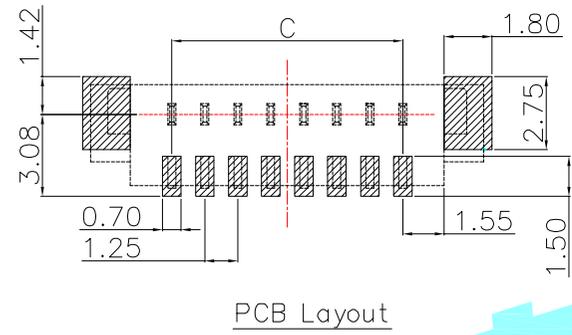


# ROHS

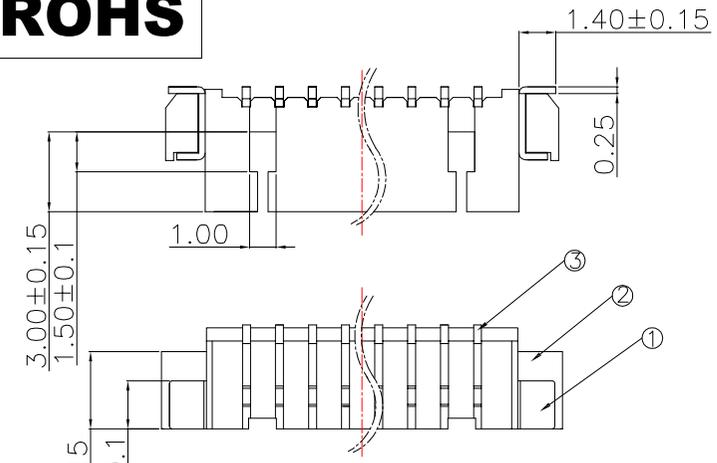

### 技术参数 SPECIFICATIONS

- ◆ 额定电压: 125V DC,AC(rms)
- ◆ Rated voltage: 125V DC,AC(rms)
- ◆ 额定电流: 1A
- ◆ Rated Current: 1A
- ◆ 耐压值: 500V AC/minute
- ◆ Withstand voltage: 500V AC/min.
- ◆ 工作温度: -25°C ~ +85°C
- ◆ Working Temp: -25°C ~ +85°C
- ◆ 绝缘电阻: ≥100 MΩ
- ◆ Insulation resistance: ≥100 MΩ
- ◆ 接触电阻: ≤20mΩ
- ◆ Contact resistance: ≤20mΩ

No. of Contacts	DIMENSIONS			
	A	B	C	D
2P	7.40	4.30	1.25	2.40
3P	8.65	5.55	2.50	3.65
4P	9.90	6.80	3.75	4.90
5P	11.15	8.05	5.00	6.15
6P	12.40	9.30	6.25	7.40
7P	13.65	10.55	7.50	8.65
8P	14.90	11.80	8.75	9.90
9P	16.15	13.05	10.0	11.15
10P	17.40	14.30	11.25	12.40
11P	18.65	15.55	12.50	13.65
12P	19.90	16.80	13.75	14.90
13P	21.15	18.05	15.00	16.15
14P	22.40	19.30	16.25	17.40
15P	23.65	20.55	17.50	18.65
16P	24.90	21.80	18.75	19.90

③	Solder Tab	—	2	Brass	Sn-PLATED	—
②	PIN	—	—	Phosphor bronze	Sn-PLATED	—
①	Base	—	1	LCP	Beige	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		 ELECTRONICS CO.,LTD						
DRAWN	LIUCAN	2022.12.1								
CHECKED				TITLE: Bar Connector Series						
APPROVALS				PART NO. 1.25T-nP-WV						
TOLERANCES ARE			30~以上	±0.30	ANGLE	UNIT: mm				
			10~30	±0.20						
			5~10	±0.15						
			~ 5	±0.10						
			±2'	SCALE: 1:1		PROJ:				
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	DRAWING NO.	SCALE: 1:1	PROJ:	SHEET 1 OF 1

NEW	—	—	—	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.