

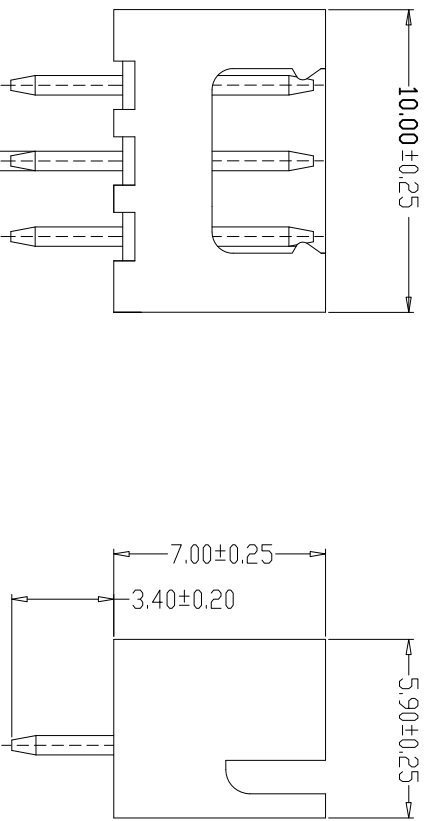


- SPECIFICATIONS**
- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperature Range: -25°C~+85°C
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltage: 1000V AC/minute
 - 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

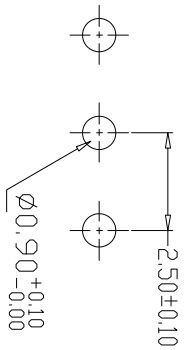


0.64±0.05

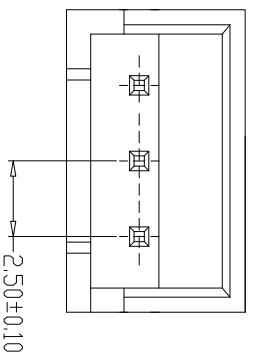

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A2501-02A	2.50	7.50
A2501-03A	5.00	10.00
A2501-04A	7.50	12.50
A2501-05A	10.00	15.00
A2501-06A	12.50	17.50
A2501-07A	15.00	20.00
A2501-08A	17.50	22.50
A2501-09A	20.00	25.00
A2501-10A	22.50	27.50
A2501-11A	25.00	30.00
A2501-12A	27.50	32.50
A2501-20A	47.50	52.50



单位 UNIT	mm
比例 SCALE	
批准: APPROVED BY	版本: A0
审核: CHECKED BY	产品料号 Production name
制图: DRAWN BY	日期: Client No

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

产品名称: TJC3直针 WAFER DIP TYPE

图号: TH-A2501-3A

客户料号: TH-A2501-3A

日期: 2022.9.6

1 2 3 4 5 6 7 8

A B C D E F