

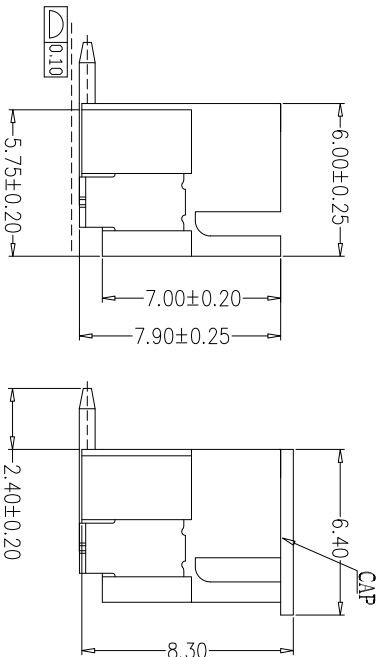
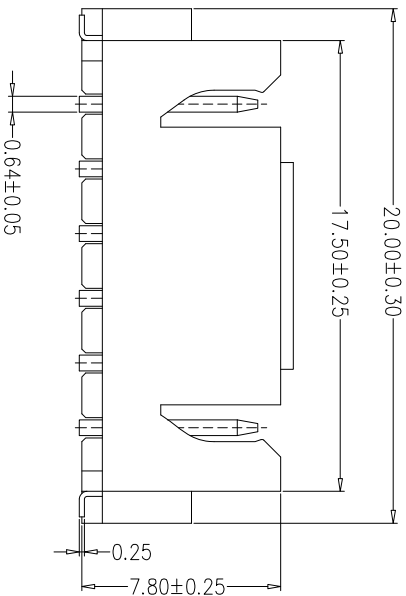


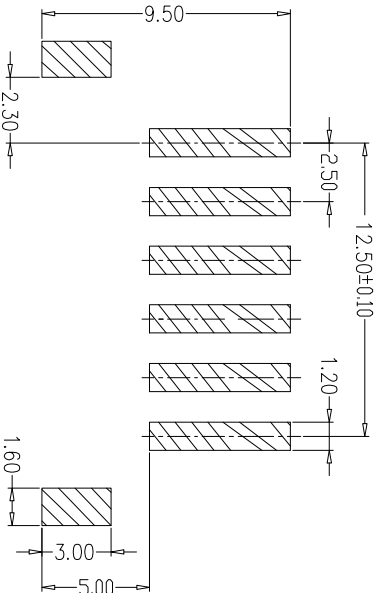

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltang: 1000V AC/minute
 - 7、Material: Wafer LCP, PA6T, UL94V-0
- PIN Brass Tin-plated
Solder tad Phosphoric bronze Tin-plated

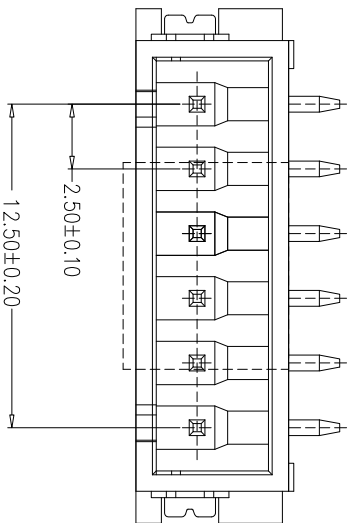

PCB LAYOUT

编 号	尺寸 (mm)		
	A	B	C
A2501LF-02A	2.50	7.50	10.00
A2501LF-03A	5.00	10.00	12.50
A2501LF-04A	7.50	12.50	15.00
A2501LF-05A	10.00	15.00	17.50
A2501LF-06A	12.50	17.50	20.00
A2501LF-07A	15.00	20.00	22.50
A2501LF-08A	17.50	22.50	25.00
A2501LF-09A	20.00	25.00	27.50
A2501LF-10A	22.50	27.50	30.00
A2501LF-11A	25.00	30.00	32.50
A2501LF-12A	27.50	32.50	35.00
A2501LF-20A	47.50	52.50	55.00



x. ±0.5	x.*±
. x±0.30	. x.*±
. xx±0.20	. xx.*±
. xxx±0.005, xxx.*±	

单位 UNIT	mm
比例 SCALE	
核准: APPROVED BY	版本: A0
审核: CHECKED BY	页次: 1/1
制图: DRAWN BY	日期:

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

产品名称 Production name	TJC3立贴 WAFER SMT TYPE
产品料号 Product No	TH-A2501LF-6A
客户料号 Client No	

F

E

D

C

B

A

F

E

D

C

B

A

版本 VERSION	变更履历 CHANGE HISTORY	变更日期 DATE
1.0		