


- SPECIFICATIONS**
- 1、Current Rating: 7A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperature Range: -25°C~+85°C
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltage: 1500V AC/minute
 - 7、Material: Wafer PBT, UL94V-0
PIN Brass Tin-plated

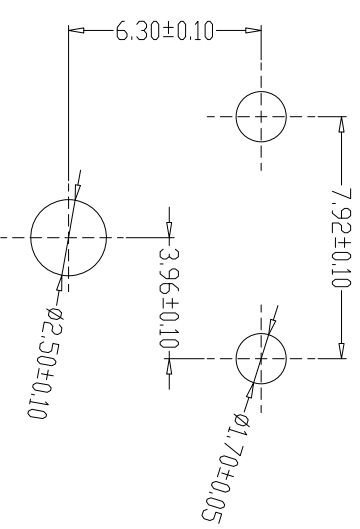

PCB LAYOUT

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

	X ± 0.5	X ± 0.5	单位 UNIT	mm
			比例 SCALE	
	X ± 0.30	X ± 0.30	核准: APPROVED BY	版本: A0
			审核: CHECKED BY	产品名称 Production name
	.XX ± 0.20	.XX ± 0.20	制图: DRAWN BY	日期: DATE
			封文辉	客户料号 Client No
	.XXX ± 0.008, .XXX ± 0.01	.XXX ± 0.008, .XXX ± 0.01		产品料号 Product No
				TH-A3964-3A2TW
				VHD弯针 WAFER DIP TYPE

版本 REV	变更日期 CHANGE DATE	变更内容 CHANGE CONTENT	变更人 CHANGE BY
10			