
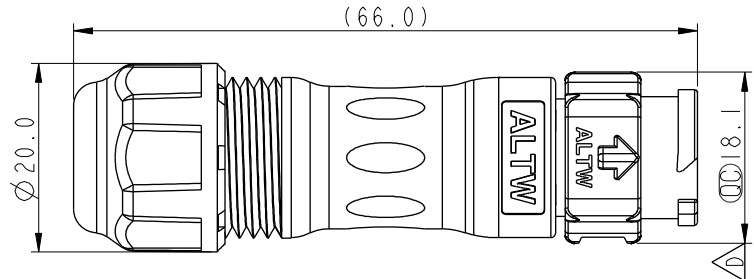


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	CI91677	2019/09/24	Brady Chung	Add New Type
C	CI91760	2019/10/15	Jane	$\triangle C$ X5
D	CI92023	2019/11/20	Vicky	$\triangle D$ X4

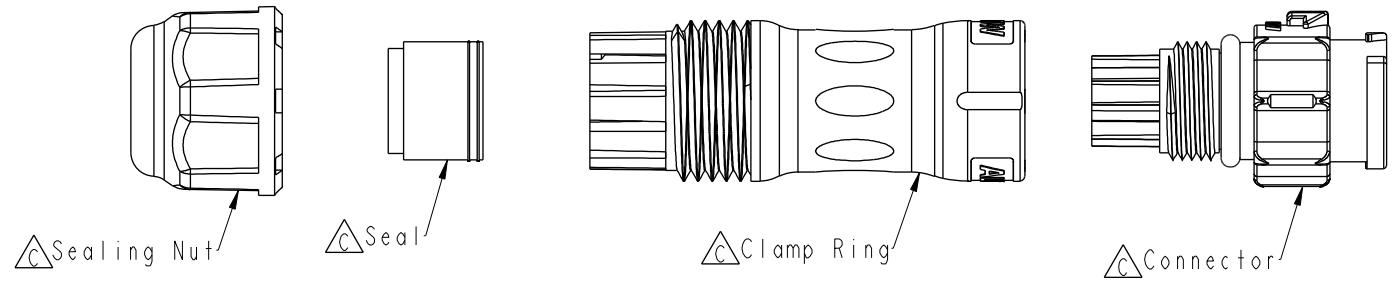


BD-XXBMM-QL8XP0

- 02-2Pin
- 03-3Pin
- 04-4Pin
- 05-5Pin
- 06-6Pin
- 07-7Pin
- 08-8Pin



- S: With Red Color Seal 1, Cable OD 5.0~6.0mm.
- M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.
- L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.
- A: With Seal 1 & Seal 2 & Seal 3.

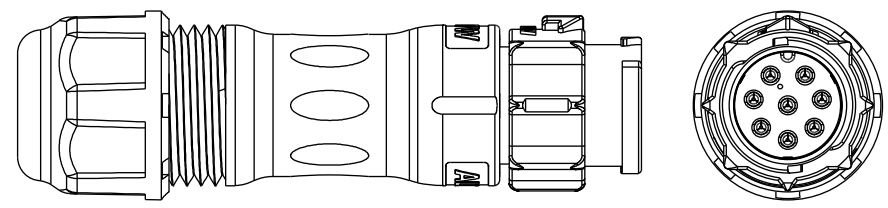

$\triangle D$  Note:

- \*  $\odot$  Important Dimension
- \* Waterproof Rate: IP68, Mated  
IP68: 1M Depth Of Water In 24hours
- \* Housing: Thermoplastic, Black
- \* Pin: Copper Alloy, Gold Plated
- \* Clamp Ring: Thermoplastic, Black
- \* Sealing Nut: Thermoplastic, Black
- \* Seals: Rubber

Pin Assignments Front View	2 Pin	3 Pin	4 Pin	5 Pin	6 Pin	7 Pin	8 Pin

UNIT:mm TOLERANCE $\pm 0.5mm$	TITLE XLOK, B-5A, CABLE W/O SR M, M, FI CRIMP, XLOK		<b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Brady Chung	DATE 2019-09-24		
	SCALE 1:1				SIZE A4	SHEET 1 OF 1	DWG NO BD-XXBMM-QL8XP0	CHECKED BY Jane Wang	DATE 2019-09-24
	REV. D	WC-REV. A.5			$\odot$ : Inspection item	CUSTOMER ALTW	APPROVED BY Neo Tsai	DATE 2019-09-24	