

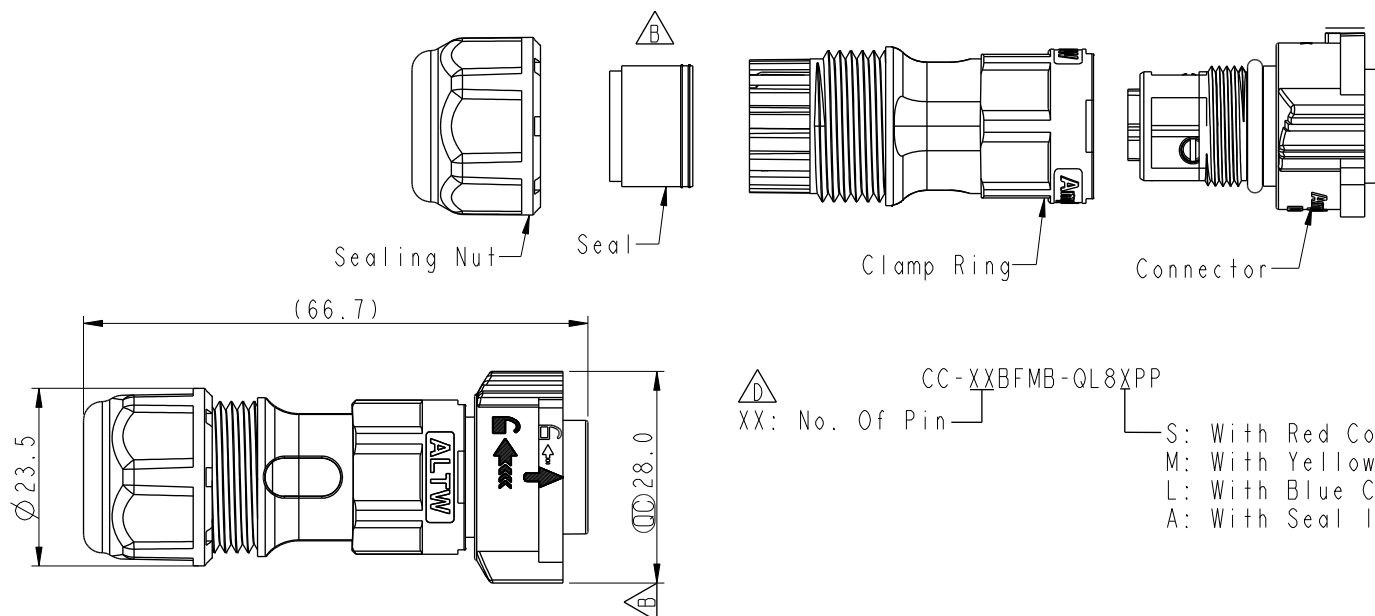


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	E191814	2019/10/23	Ruru	 X4
C	C200639	2020/05/11	Victor Hung	 X2
D	C220464	2022/04/07	Ruru	 X4



 CC-XXBFMB-QL8XPP
XX: No. Of Pin

S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

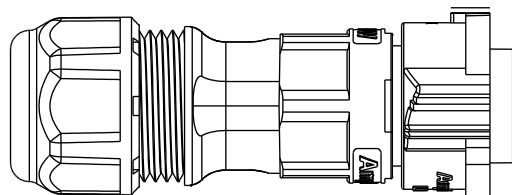


Note:  

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper Alloy, Silver Plated
 - Nut: Thermoplastic, Black
 - O-Ring-1: Rubber, Gray
 - O-Ring-2: Rubber, Dark Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seals: Rubber

Pin
Assignments
Front View




2 Pin



3 Pin

UNIT:mm



TOLERANCE

±0.5 mm

TITLE
XLOK, C-20A, CABLE W/O SR
F, M, FI SCREW IN, PUSH LOCK

SCALE
8:5

SIZE
A4

SHEET
1 OF 2

REV.
D

WC-REV.
A.3

 Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO

DWG NO

CUSTOMER

CC-XXBFMB-QL8XPP
ALTW

DRAWN BY

CHECKED BY

APPROVED BY

Victor Hung
Aric Ko
Max Yang


DATE

DATE

DATE

2020/05/11
2020/05/11
2020/05/11

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

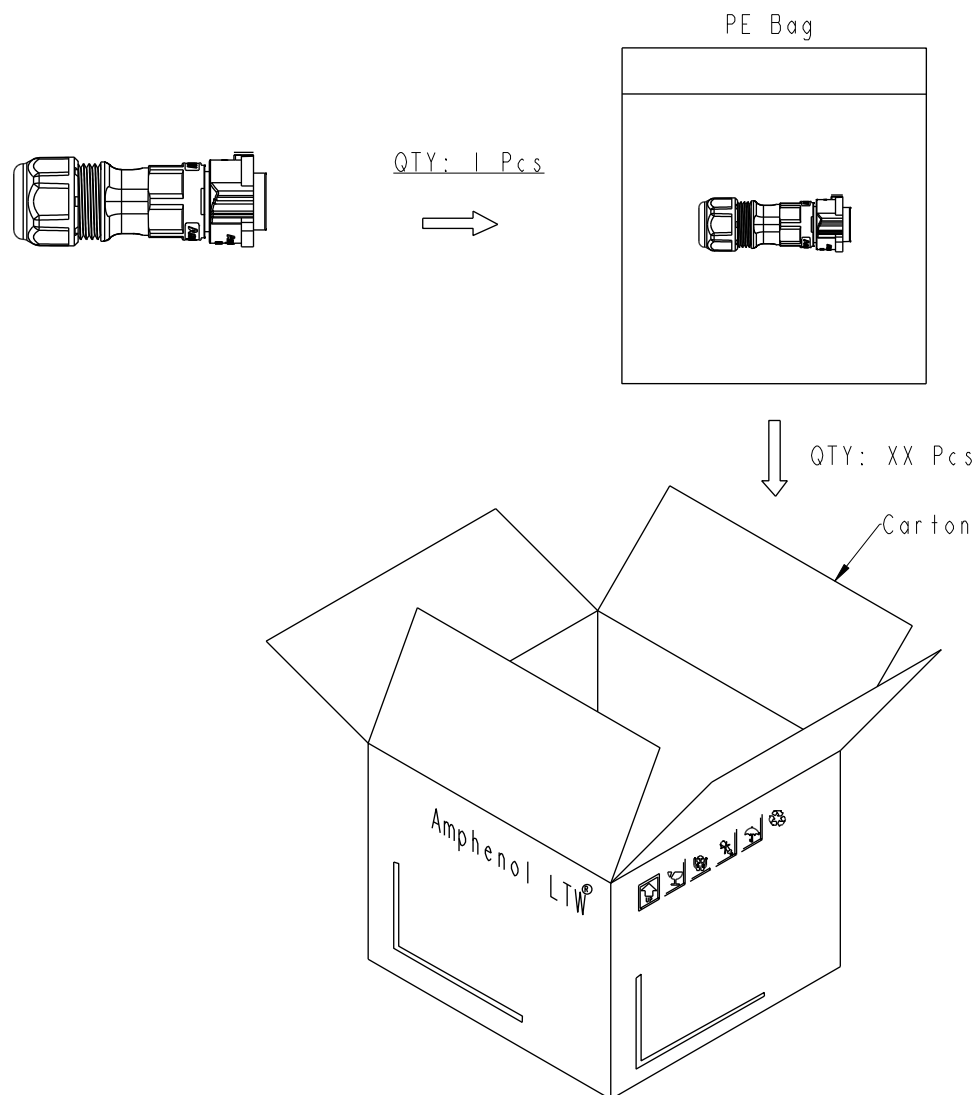

Note:
* One Set Unassembled In One PE Bag.
(每一組未組裝, 放置於一個PE袋, 並封口, 如圖示)
* Label is Attached To PE Bag Front.
(標籤貼在PE袋正面)

UNIT:mm		TITLE	
TOLERANCE		XLOK, C-20A, CABLE W/O SR	
±0.5 mm		F, M, FI SCREWIN, PUSH LOCK	
SCALE	8:5	SIZE	A4
REV.	D	WC-REV.	A.3
		SHEET	2 OF 2
		QC:Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Victor Hung	2020/05/11
CUSTOMER	CHECKED BY	DATE
ALTW	Aric Ko	2020/05/11
	APPROVED BY	DATE
	Max Yang	2020/05/11