




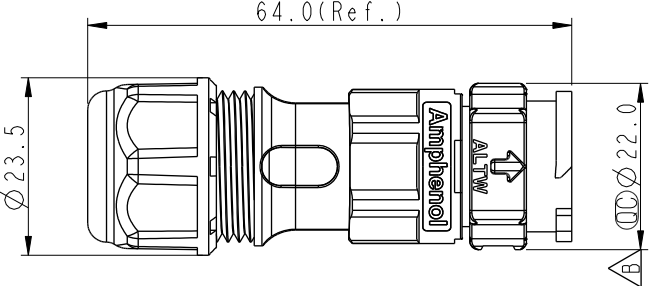
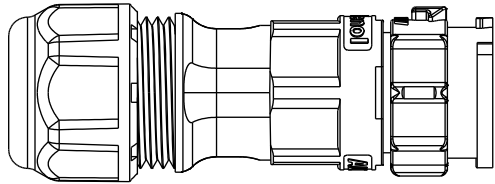




	1	2	3	4	5	6	7	8		
F					REV.	ECN NO.	DATE	SIGN	DESCRIPTION	
					B	E191814	2019/10/23	Ruru	 X3	
					C	C200598	2020/05/08	Victor Hung	 X2	
				D	C220464	2022/04/07	Ruru	 X4		
E	 Sealing Nut				 Seal	 Clamp Ring		 Connector		
D					 CC-XXBMFB-QL8XPP XX: No. Of Pin					S: With Red Color Seal 1, Cable OD 6.0~8.0mm. M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm. L: With Blue Color Seal 3, Cable OD 10.0~12.0mm. A: With Seal 1& Seal 2 & Seal 3.
C										
B	Pin Assignments Front View		 2 Pin		 3 Pin		Note:   * RoHS Compliant *  Important dimension * Waterproof rate: IPX8, mated 1m/24h * Connector - Housing: Thermoplastic, Black - Pin: Copper Alloy, Silver Plated - O-Ring: Rubber, Dark Gray * Clamp Ring: Thermoplastic, Black * Sealing Nut: Thermoplastic, Black * Seals: Rubber			
A	UNIT:mm		TITLE XLOK, C-20A, CABLE W/O SR M, F, FI SCREW IN, PUSH LOCK		 		ITEM NO		DRAWN BY Victor Hung	DATE 2020/05/08
TOLERANCE		±0.5 mm		SCALE 8:5	SIZE A4	SHEET 1 OF 2	DWG NO CC-XXBMFB-QL8XPP		CHECKED BY Aric Ko	DATE 2020/05/08
		REV. D		WC-REV. A.3	 Inspection item		CUSTOMER ALTW		APPROVED BY Max Yang	DATE 2020/05/08
	1	2	3	4	5	6	7	8	W10814-03-0001A2	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

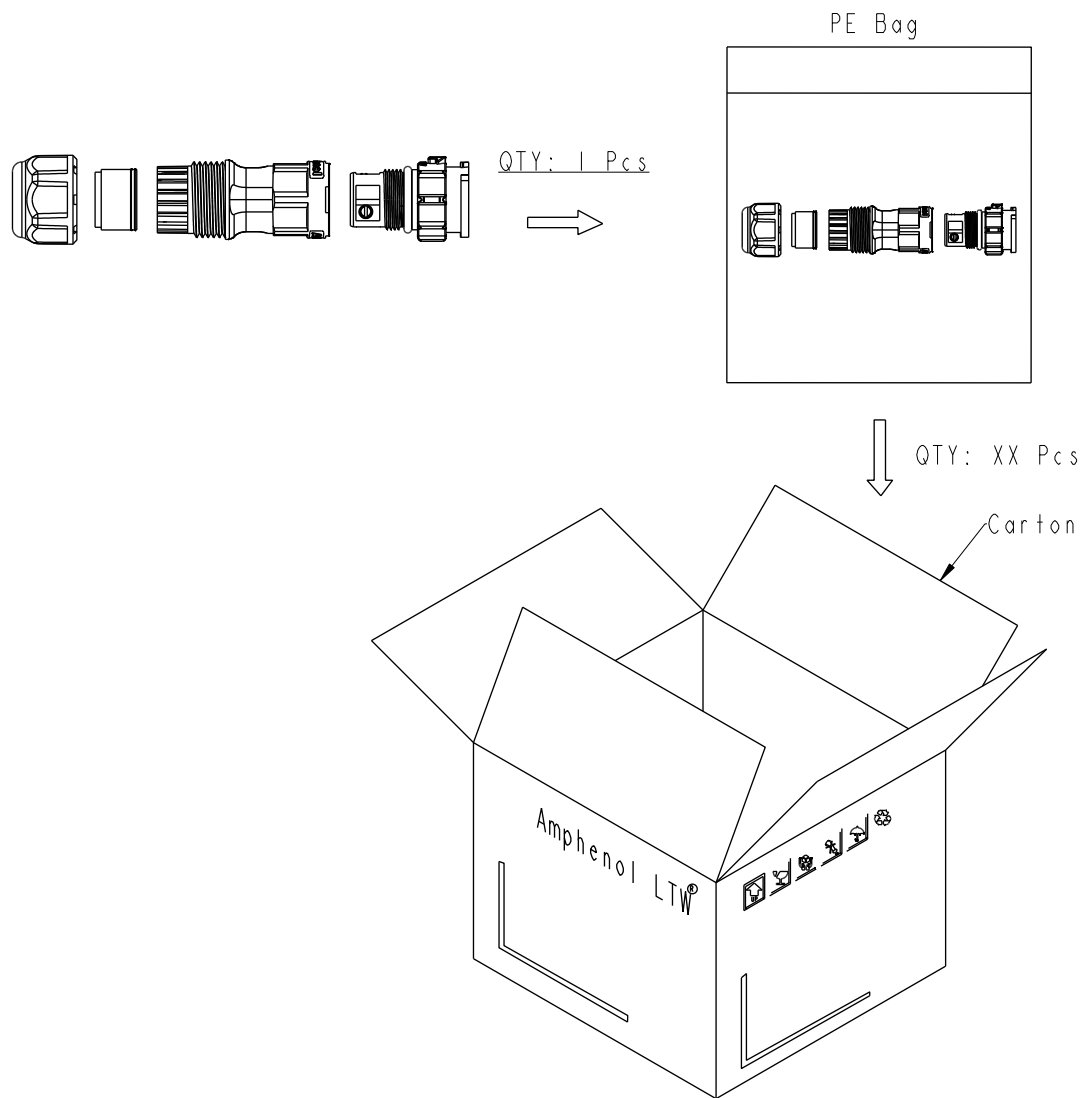

Note:
* One Set Unassembled In One PE Bag.
(每一組未組裝，放置於一個PE袋，並封口，如圖示)
* Label is Attached To PE Bag Front.
(標籤貼在PE袋正面)

UNIT:mm		TOLERANCE ± 0.5 mm		TITLE XLOK, C-20A, CABLE W/O SR M, F, FI SCREW IN, PUSH LOCK	
SCALE 8:5		SIZE A4		SHEET 2 OF 2	
REV. D		WC-REV. A.3		QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY Mafei		DATE 2018-03-14	
DWG NO CC-XXBMFB-QL8XPP		CHECKED BY Jerry		DATE 2018-03-14	
CUSTOMER ALTW		APPROVED BY Max		DATE 2018-03-14	