


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201740	2020/11/10	Vicky	$\triangle B$ X3
C	C210024	2021/01/12	Vicky	$\triangle C$ X1
D	C210235	2021/03/24	Ruru	$\triangle D$ X2

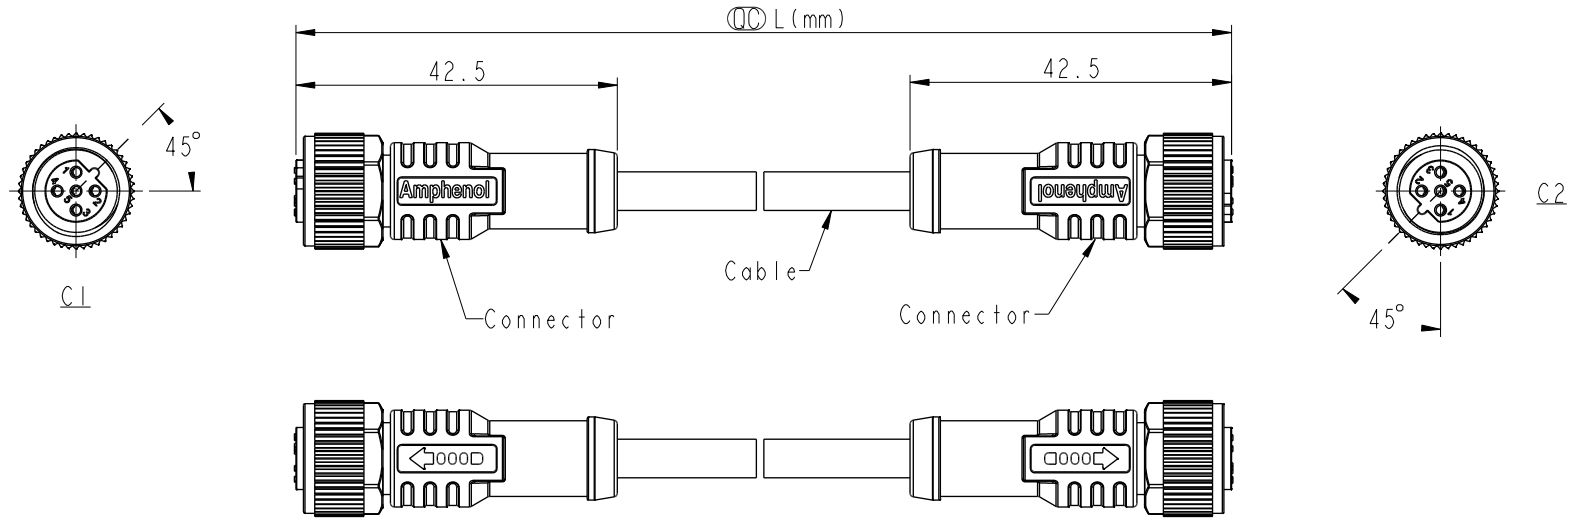

Pin Out	Wire	Color
5	Gary	灰
4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕

Pin #	Wire
5	Gary
4	Black
3	Blue
2	White
1	Brown

$\triangle B$ MI2BXXFL-12BFL-SDXXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 1 Meter
 002: 2 Meters
 :
 099: 99 Meters

Note: $\triangle B \triangle C \triangle D$
 * RoHS Compliant
 * \textcircled{Q} Important dimension
 * Waterproof rate: IPX8, mated 1m/24h
 IPX9K, mated
 * Connector:
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 O-Ring: Rubber, Green
 Nut: Metal
 Outer mold: Thermoplastic, Black
 * Cable: UL2517, 22#*5C, OD=5.1mm, PVC Jacket, Black
 * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

Pin Assignments Front View

5P

UNIT:mm	$\textcircled{\text{H}}$
TOLERANCE	±0.5 mm

TITLE ACC, SEN, B Code, DB-ENDED FF $\triangle D$			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. D	WC-REV.	\textcircled{Q} : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2018-12-07
DWG NO $\triangle B$ MI2BXXFL-12BFL-SDXXX	CHECKED BY Rita	DATE 2018-12-07
CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-07