
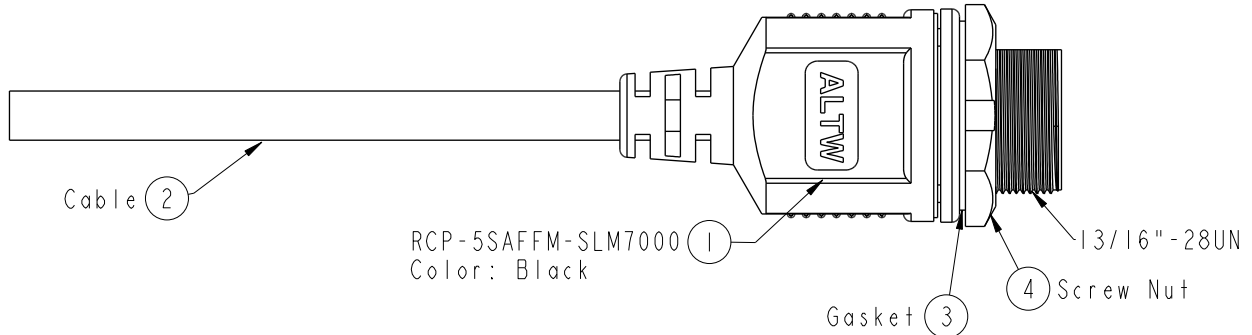
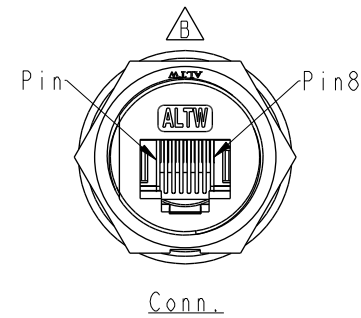



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014/06/19	Tom	Change Rev. I To Rev. A
B	C200524	2020/04/21	Vicky	△B*5

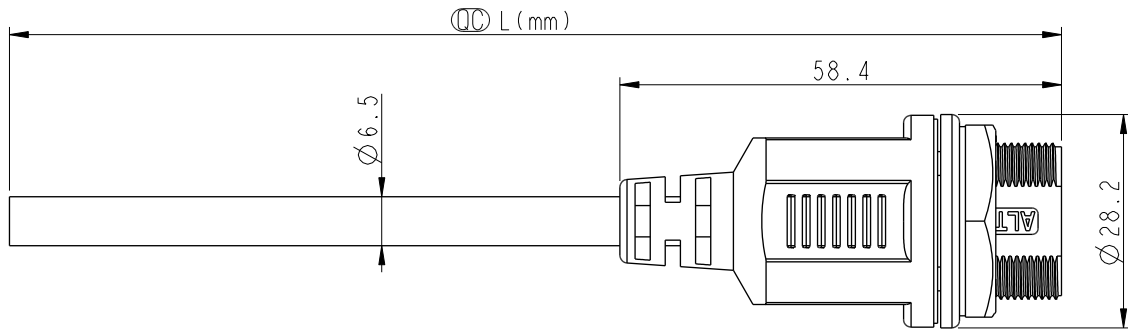

RCP-5SAFFM-SLM7BXX
 XX: 01~99Meter
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters
 Cable Length(L): 01~99Meters

Drain Wire	地線	Shield	
Brown	棕	8	Twist 對線
White/Brown	白/棕	7	
Green	綠	6	Twist 對線
White/Blue	白/藍	5	
Blue	藍	4	Twist 對線
White/Green	白/綠	3	
Orange	橙	2	Twist 對線
White/Orange	白/橙	1	
Wire Color		Conn.	
Pin Out			



Note:
 * Ⓞ Important Dimension To Check.
 △B* Waterproof Rate: IP67, Mated
 △B* Connector: Thermoplastic, Black
 * Cable: CAT5E FTP 24AWG*4P+My+Drain+AL/My, UV Resistant, OD=6.5mm, Black
 △B* Cable Length Tolerance:
 01M: +50/-0mm
 02M~03M: +100/-0mm
 04M~05M: +150/-0mm
 06M~10M: ±100mm
 11M~20M: ±200mm
 21M~30M: ±300mm
 31M~99M: ±500mm

UNIT: mm		TITLE	RJ, C PLASTIC, C5E SHLD CABLE W/SR, F, MOLDING, SCREW
TOLERANCE	±0.5mm	SCALE	1:1
		SIZE	A4
		SHEET	1 OF 1
		REV.	B
		WC-REV.	A.4
		Ⓞ	Inspection item

Amphenol LTW		ITEM NO	DRAWN BY	DATE
安費諾亮泰企業股份有限公司		DWG NO	Tom	2014-06-19
		RCP-5SAFFM-SLM7BXX	CHECKED BY	DATE
			Jerry	2014-06-19
		CUSTOMER	APPROVED BY	DATE
		ALTW	Victor	2014-06-19