

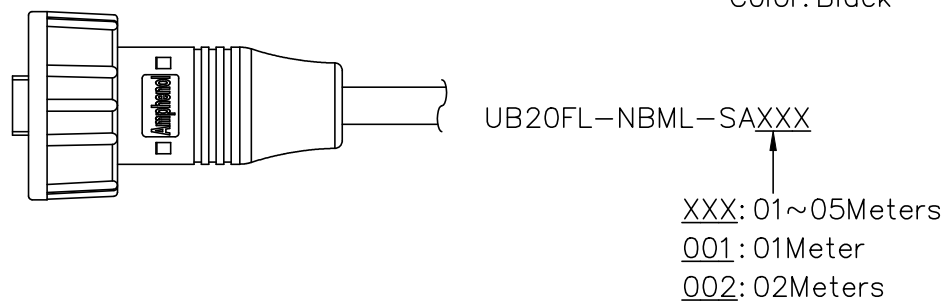


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C210802	2021/05/19	Ruru	B X1
C	C211509	2021/09/22	Ruru	A X1
D	C220720	2022/05/16	Vicky	A X1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

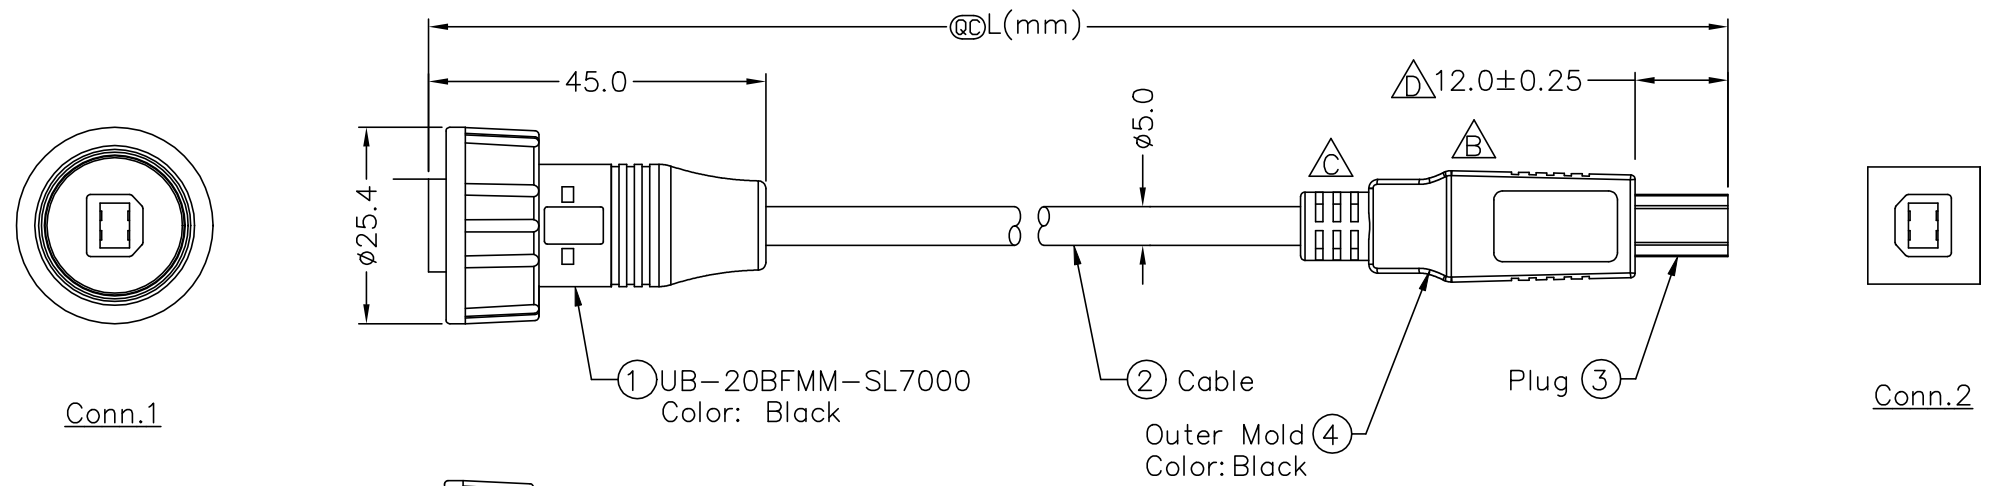

- Note:
- * @C Important Dimension.
 - * Housing: Thermoplastic, Black.
 - * USB B: Male Solder Type, Gold Plated.
 - * Cable: USB2.0 28#*1P+24#*2C+Al.My+D+B, PVC Jacket,UV Resistant,Black,OD=5.0mm.
 - * Do Not Include On The Connector"
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm

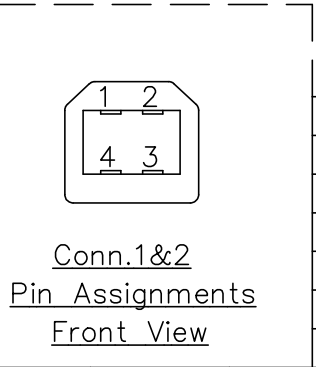

Shield	Drain	地線	Shield
4	Black (24AWG)	黑	4
3	Green (28AWG)	綠	3
2	White (28AWG)	白	2
1	Red (24AWG)	紅	1
Conn.1	Wire Color		Conn.2
Pin Out			

Twist

UNIT: mm		TITLE ACC, USB, B TYPE, DB-ENDED, FM	Amphenol LTW	ITEM NO	DRAWN BY Ruru	DATE 2020/08/21
TOLERANCE ±0.5 mm		SCALE Free	安費諾亮泰企業股份有限公司	DWG NO UB20FL-NBML-SAXXX	CHECKED BY Rita	DATE 2020/08/21
		REV. D		CUSTOMER ALTW	APPROVED BY Max	DATE 2020/08/21
		SIZE A4				
		@C : Inspection Item				