


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Released	2020/08/24	Ruru	Old Item No. UC-20AFF-QA8AXX

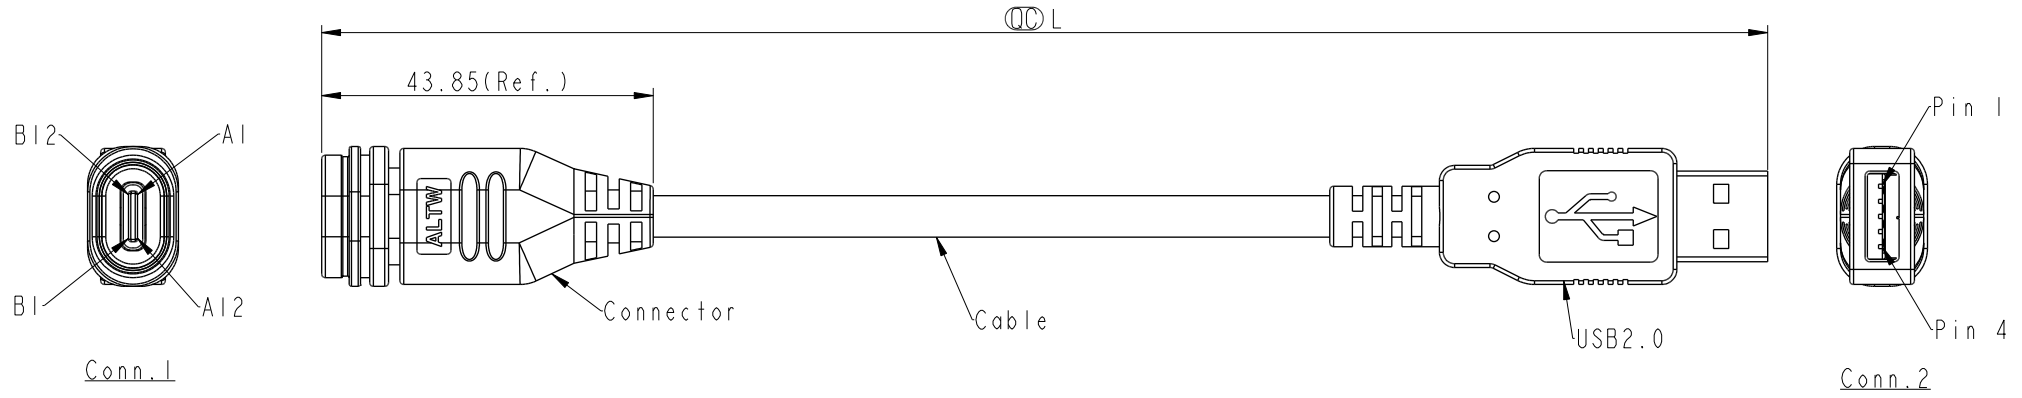

UC20FL-NAML-QAXXX
 XXX: 01-03Meters
 001: 1Meters
 002: 2Meters
 003: 3Meters

Jump Wire	Shield		Shield	
	4	Braid 編織	B12	
			B1	
			A12	
			A1	
	3	Green 綠	A6	Twist
	2	White 白	A7	
	1	Red 紅	B9	
			B4	
			A9	
		A4		
Conn. 2	Wire Color	Conn. 1		
Pin Out (QC)				

Note:
 * (QC) Important Dimension.
 * Conn.1: Waterproof Rate: IP68, Mated.
 * Conn.2: Non Waterproof.
 * Housing: Thermoplastic, Black.
 * Cable: USB3.0(30#*1P+D+AL+MY)*2C+
 (30#*1P+AL)*1C+26#*2C+F+AB OD: 3.7+/-0.2mm Black
 * Cable Length Tolerance: 01M: +60/-0
 02M~03M: +120/-0

UNIT: mm			TITLE ACC, USB, C TYPE, DB-ENDED, FM	Amphenol LTW		ITEM NO	DRAWN BY Ruru	DATE 2020-08-24
TOLERANCE ±0.5mm			SCALE 1:1	SIZE A4	SHEET 1 OF 1	DWG NO UC20FL-NAML-QAXXX	CHECKED BY Rita	DATE 2020-08-24
REV. A			WC-REV. .0	(QC): Inspection item		CUSTOMER ALTW	APPROVED BY Max	DATE 2020-08-24