# 

TE Internal #: ANT-433-WRT-RPS Dome/Puck Antenna, Single Band, LPWAN / LoRaWAN, External Mount, Stud/Screw/Lug Mount, Solder, Omnidirectional, Single Port, Gain < 0 dBi

### View on TE.com >

Antennas



## Wireless Application: LoRaWAN, LPWAN

Mounting Location: External

Mounting Type: Stud/Screw/Lug Mount

Frequency Category: 410-470

Antenna Type: Dome/Puck

## Features

## Product Type Features

Antenna Termination	Solder
Antenna Product Type Configuration Features	Antenna



Antenna Style	Dome
Mounting Location	External
Antenna Type	Dome/Puck
Band Type	Single Band
Port Configuration	Single Port
Electrical Characteristics	
VSWR (Max)	<1.9:1
Impedance	50 Ω
Signal Characteristics	
Frequency Band	433 MHz
Frequency Category	410 - 470
Peak Gain	< 0 dBi
Body Features	
Product Weight	14.12 g[.49805 oz]

## ANT-433-WRT-RPS

Dome/Puck Antenna, Single Band, LPWAN / LoRaWAN, External Mount, Stud/Screw /Lug Mount, Solder, Omnidirectional, Single Port, Gain < 0 dBi



#### **Mechanical Attachment**

Polarization	Linear
Mounting Type	Stud/Screw/Lug Mount
Dimensions	
Cable Length	.21 m[.71 ft]
Product Width	19 mm[.75 in]
Product Length	26.8 mm[1.06 in]
Product Height	0 mm[0 in]
Operation/Application	
Antenna Environment	Outdoor
Directionality	Omnidirectional
Industry Standards	
Wireless Application	LoRaWAN, LPWAN
Primary Application	LoRaWAN, LPWAN

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

## Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished

## ANT-433-WRT-RPS

Dome/Puck Antenna, Single Band, LPWAN / LoRaWAN, External Mount, Stud/Screw /Lug Mount, Solder, Omnidirectional, Single Port, Gain < 0 dBi



product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# **Compatible Parts**



TE Part # CONREVSMA001-G RP-SMA Jack 50 Ohm PCB Through Hole



TE Part # CONREVSMA002-SMD-G RP-SMA RA Jack 50 Ohm PCB Surface Mount



TE Part # L9000251-01 RP-SMA Jack 50 Ohm .062 PCB Edge Mount




TE Part # L9000254-01 RP-SMA Jack 50 Ohm .031 PCB Edge Mount

# Customers Also Bought





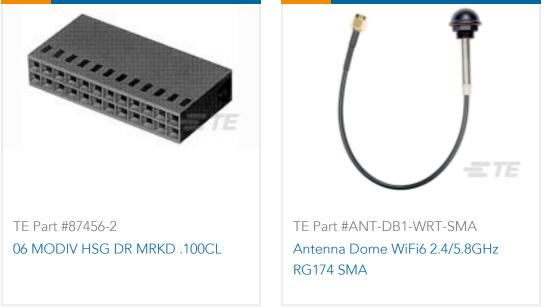

## Documents

Product Drawings

Antenna Dome 433MHz RG174 216 RPS

### ANT-433-WRT-RPS

Dome/Puck Antenna, Single Band, LPWAN / LoRaWAN, External Mount, Stud/Screw /Lug Mount, Solder, Omnidirectional, Single Port, Gain < 0 dBi



### English

CAD Files Customer View Model ENG\_CVM\_CVM\_ANT-433-WRT-RPS\_C.2d\_dxf.zip English 3D PDF 3D Customer View Model ENG\_CVM\_CVM\_ANT-433-WRT-RPS\_C.3d\_igs.zip English Customer View Model ENG\_CVM\_CVM\_ANT-433-WRT-RPS\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

## Datasheets & Catalog Pages 433 MHz External Panel-Mount Antenna

English