



Part Number : [1731120328](#)


Product Description : FCT High Power Contact, Male, Straight, Crimp, 0.20µm Gold Mating Plating, 3.00-5.00µm Nickel Termination Plating, 10.0A, 20-16 AWG

Series Number : 173112

Status : Active

Product Category : D-Sub Contacts

Engineering Number : FMP002P190

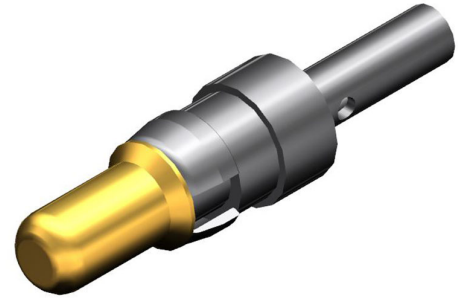

Documents & Resources

Drawings

[Drawing 1731120328_sd.pdf](#)

Specifications

[Application Specification 2195600660-000.pdf](#)

[Packaging Specification 1731120008-PK-000.pdf](#)

[Product Specification 2195600660-000.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Reviewed per IEC 61249-2-21
REACH SVHC	Contains Lead per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

[Multiple Part Product Compliance Statements](#)

- Eu RoHS
- REACH SVHC
- Low-Halogen

[Multiple Part Industry Compliance Documents](#)

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	D-Sub Contacts
Series	173112
Description	FCT High Power Contact, Male, Straight, Crimp, 0.20µm Gold Mating Plating, 3.00-5.00µm Nickel Termination Plating, 10.0A, 20-16 AWG
Contact Type	High Power
Magnetic	Yes
Product Family	FCT D-Sub Connectors
Product Name	FCT Products
Type	Mixed Layout
UPC	191128055635

Electrical

Current - Maximum per Contact	10.0A
-------------------------------	-------

Physical

Durability (mating cycles max)	200
Gender	Male
Material - Contact	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Nickel over Copper
Material - Retaining Clip	Copper Alloy
Net Weight	2.000/g
Orientation	Straight
Packaging Type	Bag

Plating min - Mating	0.200µm
Plating min - Termination	3.000-5.000µm
Temperature Range - Operating	-55° to +155°C
Termination Style	Crimp
Wire Size (AWG)	16, 18, 20

Use with Part(s)

Description	Part Number
Use With	FCT Mixed Layout Connectors

Application Tooling

Global

Description	Part Number
FCT Hand Crimp Tool, 8-Step Adjust	<u>1731121731</u>
FCT Locator for High Power Contacts	<u>1731121734</u>
FCT Removal Tool for Size 8 Contacts	<u>1731121747</u>