

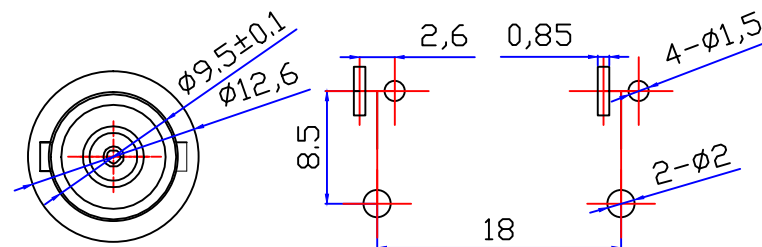
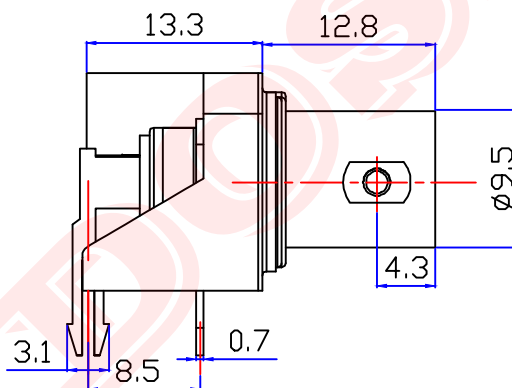


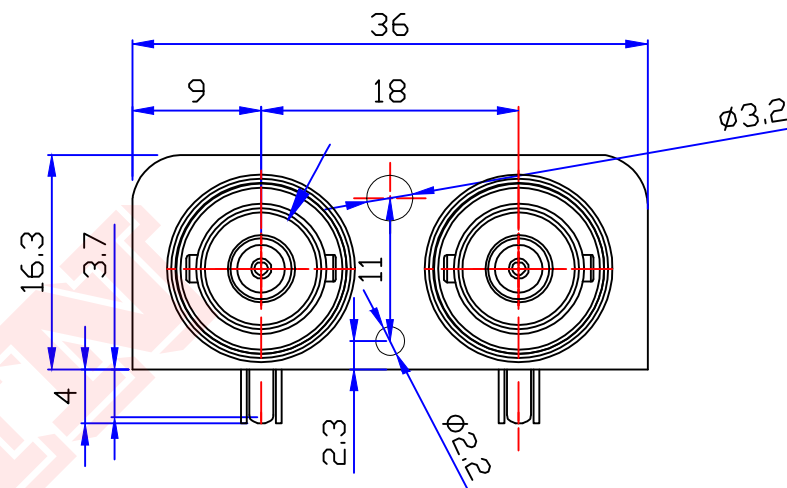

Customer NO:		DOSIN-801-0433		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr.chen	2017/11/26	John kine
B				

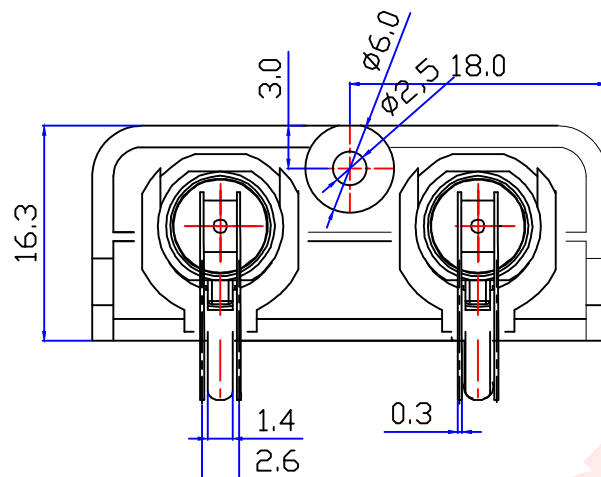

PCB

Specifications:

IMPEDANCE: 50 Ohms

Frequency range: 0~3GHz

VSWR: 1.5MAX

Working voltage: 500V rms @ sea level

Insulation resistance: 5000 Ohms min

Temperature range: -55°C TO +155°C

Relative temperature: ≤95%(40° C±2° C)

1	BODY	Zinc	NICKEL	2	NOTE:	Tolerance	X.	±0.15	 Dosin Industrial (H K) Co. Ltd 东莞市德索五金电子制品有限公司 Dosin Hardware Electronics Co., Ltd	E-mail: dosin2005@163.com dosin2005@dosin-china.com Web: http://www.dosinconn.com TEL: (0086) 769-81153906 FAX: (0086) 769-81875836	
2	SOLDER COLUMN	Iron	NICKEL	2			X. X	±0.10			
3	IRON PLATES	Iron	NICKEL	1			X. XX	±0.05			
4	PIN	phosphor copper	GOLD	4			Angular	±5°			
5	INSULATOR	POM	White	2	DRAWN		View	UNIT	MM	Name: BNC Jack 1*2 Port 90° PCB Mount	
6	PANEL	PBT	Black	1	Zelin.chen						
7					CHECKED						
8											
9											
10					APPROVALS						
NO	Component Number	Material	Finish	QTY	John	SCALE	1:1	Date	Time	CAD FILE	SHEET: 1 OF 1
A		B		C		D		E		F	