



RoHS 2.0

REV.	ECN	NO.	DESCRIPTION	DATE	DESIGN
A1.		/.	重新核对图面	21.01.03	LiHui



3D VIEW

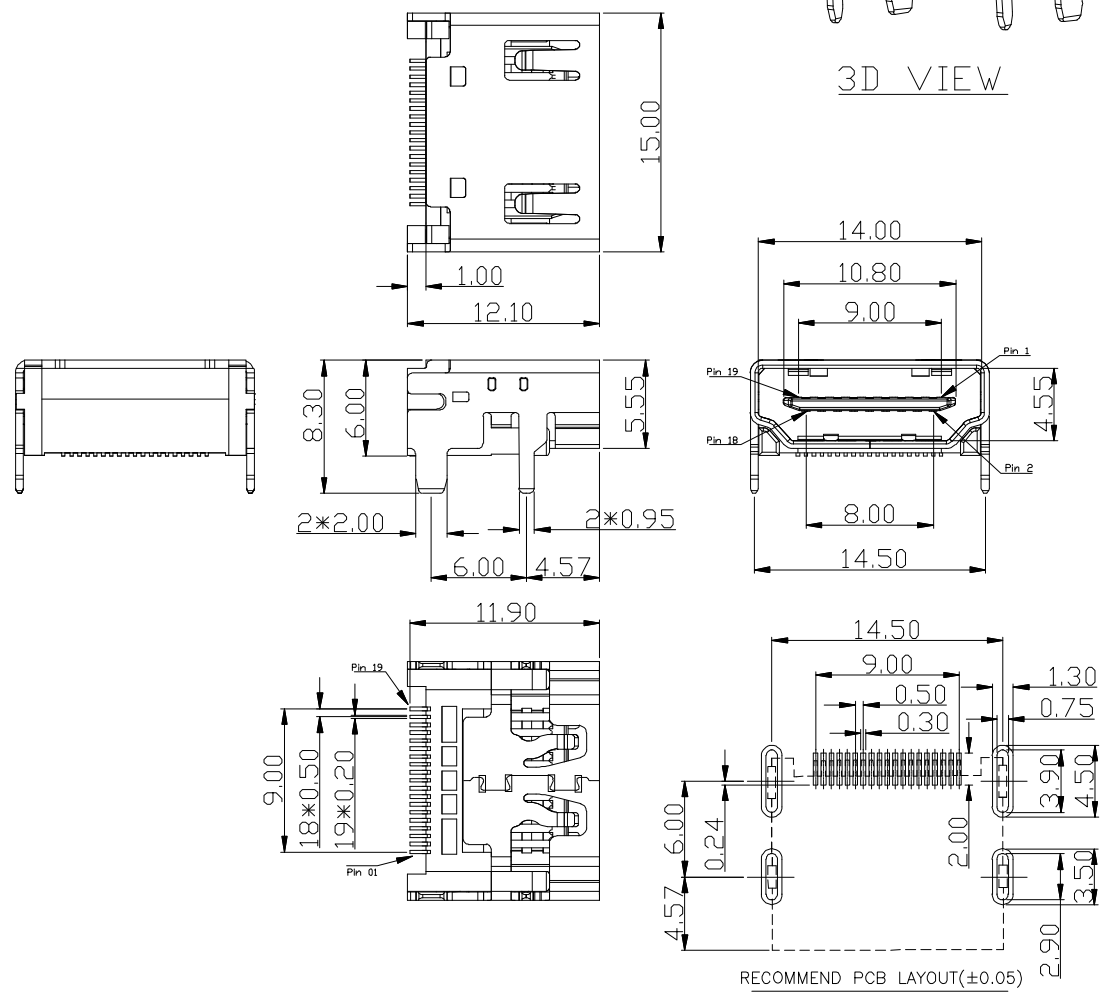

RECOMMEND PCB LAYOUT(±0.05)

NOTES:

- MATERIAL:
 - HOUSING: LCP,COLOR IS GRAY,HIGH TEMPERATURE PLASTIC;
 - CONTACT: BRASS(H65 T=0.20mm);
 - SHELL: COLD ROLLED IRON(SPCC,T=0.50mm);
- FINISH:
 - TERMINAL:
 - CONTACT AREA: GOLD PLATED G/Fu”(2.0 AREA) ;
 - SOLDER AREA: PLATED OVER TIN;
 - SHELL: NI PLATED OVER ALL ;
- ELECTRICAL:
 - VOLTAGE RATING: 40 VAC RMS;
 - CURRENT RATING: 0.5 AMP;
 - CONTACT RESISTANCE: 30mΩ MAX.;
 - WITHSTAND VOLTAGE: 500 VAC RMS
50(60)Hz,1MIN.;
 - INSULATION RESISTANCE: 100MEGOHMS MIN
@500V DC;
- MECHANICAL:
 - MATING FORCE: 44.1N MAX.;
 - UNMATING FORCE: 9.8N MIN.;
 - OPERATING LIFE: 10000 CYCLES MIN.;
- ENVIRONMENTAL:
 - STORAGE TEMPERATURE RANGE: -40°C~+85°C;
 - OPERATION TEMPERATURE RANGE: -25°C~+70°C;

深圳市华灿天禄电子有限公司					
UNLESS OTHERWISE GENERAL TOLERANCE:	NAME:	P/N: 09.02.02.003		DWG NO.: HDMI-01	
X.xx ±0.10	HDMI 铁无点镍2.0	THIRD ANGLE PROJECTION	UNIT: mm	SCALE: 1:1	SIZE: A4
X.xx ±0.20					SHEET: 1/1
X.x ±0.30					REV.: A1
ANGULAR:	DRAWN:	CHECKED:	APPROVED		
X.xx° ±1°					
X.x° ±3°					
X.° ±5°					