


# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse terminal block for assembly on NS 35, for 5 x 20 cartridge fuse inserts

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 3039887                        |
| Packing unit                         | 1 pc                           |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | BE02                           |
| Product key                          | BE2134                         |
| GTIN                                 | 4017918936815                  |
| Weight per piece (including packing) | 14.73 g                        |
| Weight per piece (excluding packing) | 14.73 g                        |
| Customs tariff number                | 85369095                       |
| Country of origin                    | TR                             |

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## Technical data

### Product properties

|                       |                     |
|-----------------------|---------------------|
| Product type          | Fuse terminal block |
| Number of connections | 2                   |
| Number of rows        | 1                   |
| Potentials            | 1                   |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |                                                                                                              |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Fuse type                                       | Glass / ceramics / ...                                                                                       |
| Rated surge voltage                             | 6 kV                                                                                                         |
| Maximum power dissipation for nominal condition | 1.02 W                                                                                                       |
| Fuse                                            | G / 5 x 20                                                                                                   |
| Maximum power dissipation                       | max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)                     |
|                                                 | max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)        |
|                                                 | max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)                |
|                                                 | max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit) |

### Connection data

|                                 |                   |
|---------------------------------|-------------------|
| Number of connections per level | 2                 |
| Nominal cross section           | 4 mm <sup>2</sup> |

#### 1 level

|                                                                                           |                                                    |
|-------------------------------------------------------------------------------------------|----------------------------------------------------|
| Stripping length                                                                          | 8 mm ... 10 mm                                     |
| Internal cylindrical gage                                                                 | A4                                                 |
| Connection in acc. with standard                                                          | IEC 60947-7-3                                      |
| Conductor cross section rigid                                                             | 0.08 mm <sup>2</sup> ... 6 mm <sup>2</sup>         |
| Cross section AWG                                                                         | 28 ... 10 (converted acc. to IEC)                  |
| Conductor cross section flexible                                                          | 0.08 mm <sup>2</sup> ... 4 mm <sup>2</sup>         |
| Conductor cross section, flexible [AWG]                                                   | 28 ... 12 (converted acc. to IEC)                  |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>         |
| Flexible conductor cross section (ferrule with plastic sleeve)                            | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>         |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup>          |
| Nominal current                                                                           | 6.3 A                                              |
| Maximum load current                                                                      | 6.3 A (the current is determined by the fuse used) |
| Nominal voltage                                                                           | 500 V                                              |
| Nominal cross section                                                                     | 1 mm <sup>2</sup>                                  |

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## Dimensions

|       |        |
|-------|--------|
| Width | 6.2 mm |
|-------|--------|

## Material specifications

|                                                                         |             |
|-------------------------------------------------------------------------|-------------|
| Color                                                                   | blue        |
| Flammability rating according to UL 94                                  | V0          |
| Insulating material group                                               | I           |
| Insulating material                                                     | PA          |
| Static insulating material application in cold                          | -60 °C      |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C      |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C      |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg    |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed      |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed      |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed      |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Environmental and real-life conditions

### Needle-flame test

|                  |             |
|------------------|-------------|
| Time of exposure | 30 s        |
| Result           | Test passed |

### Oscillation/broadband noise

|                        |                                             |
|------------------------|---------------------------------------------|
| Spectrum               | Service life test category 2, bogie-mounted |
| Frequency              | 5 - 250 Hz                                  |
| ASD level              | 6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz   |
| Acceleration           | 3.12g                                       |
| Test duration per axis | 5 h                                         |
| Test directions        | X-, Y- and Z-axis                           |
| Result                 | Test passed                                 |

### Shocks

|                                |           |
|--------------------------------|-----------|
| Pulse shape                    | Half-sine |
| Acceleration                   | 30g       |
| Shock duration                 | 18 ms     |
| Number of shocks per direction | 3         |

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

|                 |                                   |
|-----------------|-----------------------------------|
| Test directions | X-, Y- and Z-axis (pos. and neg.) |
| Result          | Test passed                       |

## Ambient conditions

|                                          |                                                                           |
|------------------------------------------|---------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)       |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                           |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                           |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                             |

## Standards and regulations

|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-3 |
|----------------------------------|---------------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |

# ST 4-HESI (5X20) BU - Fuse modular terminal block




3039887

<https://www.phoenixcontact.com/us/products/3039887>

## Drawings

### Application drawing

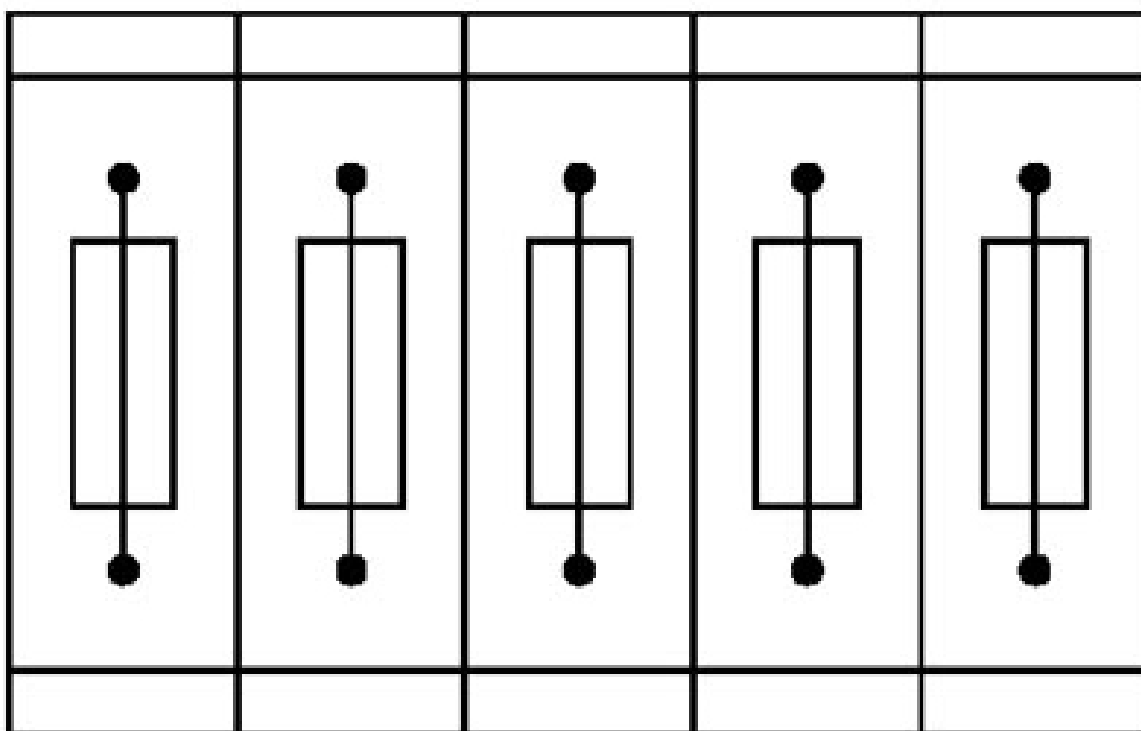

Fuse terminal blocks in interconnected arrangement,  
block consisting of 5 fuse terminal blocks


# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

Application drawing

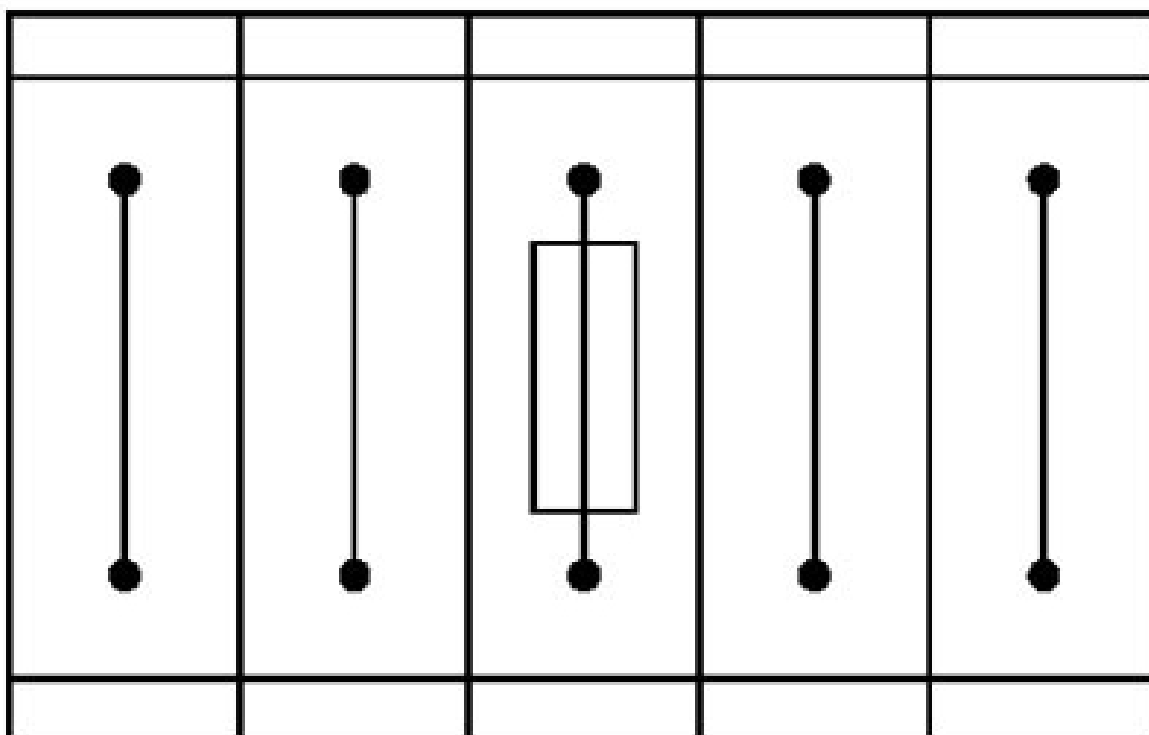

Fuse terminal block in single arrangement,  
block consisting of one fuse terminal block and 4 feed-through terminal blocks


# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

Circuit diagram

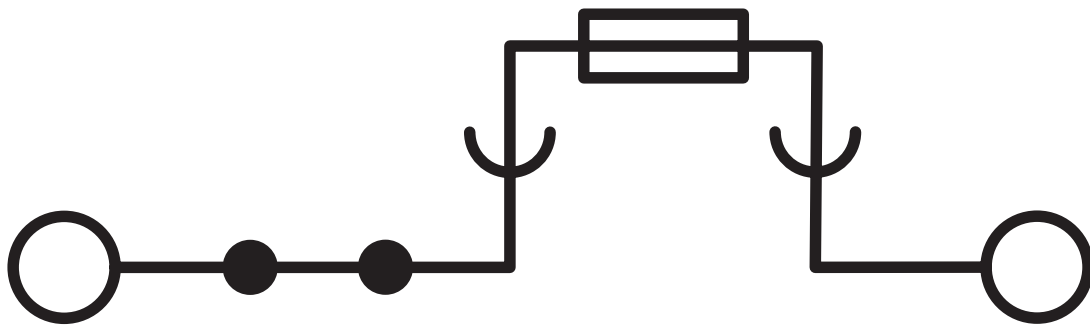

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141116 |
|-------------|----------|

### ETIM

|          |          |
|----------|----------|
| ETIM 8.0 | EC000899 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|



# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## Environmental product compliance

### EU RoHS

|                                         |                    |
|-----------------------------------------|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|-----------------------------------------|--------------------|

### China RoHS

|                                        |                                          |
|----------------------------------------|------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|                                        | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## Accessories

**i** Note: Applying some accessories below might limit this product.

### FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/us/products/3030336>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

**i** Max. current carrying capacity: 32 A

### FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/us/products/3030242>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

**i** Max. current carrying capacity: 32 A

# ST 4-HESI (5X20) BU - Fuse modular terminal block

3039887

<https://www.phoenixcontact.com/us/products/3039887>

## FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/us/products/3030255>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 32 A

---


## FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/us/products/3030349>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 32 A

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/us/products/1008238>



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, color: red

 Max. current carrying capacity: 32 A

---


## FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/us/products/3030271>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 32 A

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/us/products/3030365>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 32 A

---


## FBSR 2-6 - Plug-in bridge

3033715

<https://www.phoenixcontact.com/us/products/3033715>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

# ST 4-HESI (5X20) BU - Fuse modular terminal block

3039887

<https://www.phoenixcontact.com/us/products/3039887>


## FBSR 3-6 - Plug-in bridge

3001594

<https://www.phoenixcontact.com/us/products/3001594>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: red

 Max. current carrying capacity: 24 A

---


## FBSR 4-6 - Plug-in bridge

3001595

<https://www.phoenixcontact.com/us/products/3001595>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 24 A

---

# ST 4-HESI (5X20) BU - Fuse modular terminal block

3039887

<https://www.phoenixcontact.com/us/products/3039887>


## FBSR 5-6 - Plug-in bridge

3001596

<https://www.phoenixcontact.com/us/products/3001596>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 10-6 - Plug-in bridge

3033716

<https://www.phoenixcontact.com/us/products/3033716>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 24 A

---

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## FBSRH 2-6 - Short-circuit connector

3033812

<https://www.phoenixcontact.com/us/products/3033812>



Short-circuit connector, pitch: 6.2 mm, number of positions: 2, color: red

 Max. current carrying capacity: 24 A

---


## FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/us/products/3036932>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 32 A

---



# ST 4-HESI (5X20) BU - Fuse modular terminal block

3039887

<https://www.phoenixcontact.com/us/products/3039887>

## FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/us/products/3036945>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 32 A

---


## FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/us/products/3036958>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 32 A

---

# ST 4-HESI (5X20) BU - Fuse modular terminal block

3039887

<https://www.phoenixcontact.com/us/products/3039887>


## FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/us/products/3036961>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 32 A

---


## FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/us/products/3032198>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 32 A

# ST 4-HESI (5X20) BU - Fuse modular terminal block


3039887

<https://www.phoenixcontact.com/us/products/3039887>

## FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/us/products/3032208>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 32 A

---

## FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/us/products/3032211>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, color: blue

 Max. current carrying capacity: 32 A

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## ATP-ST 4 - Partition plate

3030721

<https://www.phoenixcontact.com/us/products/3030721>

Partition plate, depth: 39 mm, width: 2 mm, height: 59.8 mm, color: gray



---

## SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/us/products/1204517>

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



## ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

### DMET 5X20 - Feed-through connector

3032075

<https://www.phoenixcontact.com/us/products/3032075>



Feed-through metal in the shape of a 5 x 20 mm glass tube fuse insert for use in fuse terminal blocks.

---

### ST-IL - Mounting material

3039900

<https://www.phoenixcontact.com/us/products/3039900>

Operating decal for the ST terminal block



## ST 4-HESI (5X20) BU - Fuse modular terminal block

3039887

<https://www.phoenixcontact.com/us/products/3039887>



### ST-BW - Actuation tool

1207608

<https://www.phoenixcontact.com/us/products/1207608>

Actuation tool, for all 2.5 mm<sup>2</sup> - 4.0 mm<sup>2</sup> spring-cages



---

### NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

## ST 4-HESI (5X20) BU - Fuse modular terminal block

3039887

<https://www.phoenixcontact.com/us/products/3039887>



### NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

### NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver



# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/us/products/1050004>




Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

---

## ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/us/products/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/us/products/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

---

## ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/us/products/1050020>



Zack marker strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm

# ST 4-HESI (5X20) BU - Fuse modular terminal block

3039887

<https://www.phoenixcontact.com/us/products/3039887>

## ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/us/products/1050033>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

---

## ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/us/products/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/us/products/0818108>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

---

## UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/us/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/us/products/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

---

## UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/us/products/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/us/products/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

---

## GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/us/products/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5



# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/us/products/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

---

## ZBF 6:UNBEDRUCKT - Zack Marker strip, flat

0808710

<https://www.phoenixcontact.com/us/products/0808710>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## ZBF 6 CUS - Zack Marker strip, flat

0825027

<https://www.phoenixcontact.com/us/products/0825027>



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

## UC-TMF 6 - Marker for terminal blocks

0818140

<https://www.phoenixcontact.com/us/products/0818140>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## UC-TMF 6 CUS - Marker for terminal blocks

0824646

<https://www.phoenixcontact.com/us/products/0824646>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 5.1 mm, Number of individual labels: 80

---

## UCT-TMF 6 - Marker for terminal blocks

0828746

<https://www.phoenixcontact.com/us/products/0828746>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## UCT-TMF 6 CUS - Marker for terminal blocks

0829665

<https://www.phoenixcontact.com/us/products/0829665>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.4 x 4.7 mm, Number of individual labels: 60

---

## ZBF 6,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808749

<https://www.phoenixcontact.com/us/products/0808749>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## ZBF 6,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808765

<https://www.phoenixcontact.com/us/products/0808765>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

---

## ZBF 6,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810834

<https://www.phoenixcontact.com/us/products/0810834>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

# ST 4-HESI (5X20) BU - Fuse modular terminal block



3039887

<https://www.phoenixcontact.com/us/products/3039887>

## ZBF 6,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810876

<https://www.phoenixcontact.com/us/products/0810876>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

## E/AL-NS 35 - End bracket

1201662

<https://www.phoenixcontact.com/us/products/1201662>



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)