


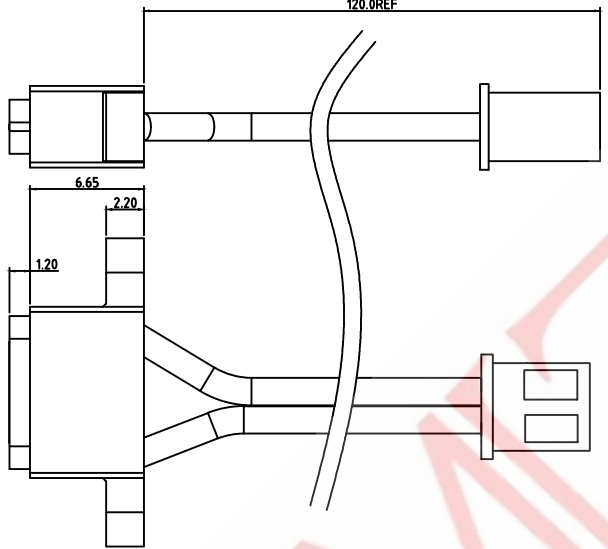


SAMZO REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.12

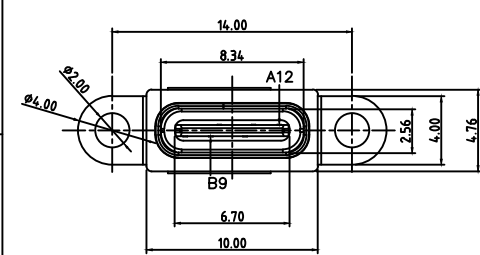


- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - RATING: 3A;
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
 - DURABILITY: 10,000 CYCLES MIN.;
 - INSERTION FORCE: 5-25N;
 - EXTRACTION FORCE: 6-25N;
 - WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX6.
 - PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
 - PACKAGING: TAPE & REEL.




注: 防水圈是圆形截面, 直径为1.0mm的硅胶圈, 防水圈挤压量, 由1.0mm挤压到0.5mm ~ 0.6mm, 防水效果好

黑 负极 A12/B12
红 正极 A9/B9

FKAKALCCA

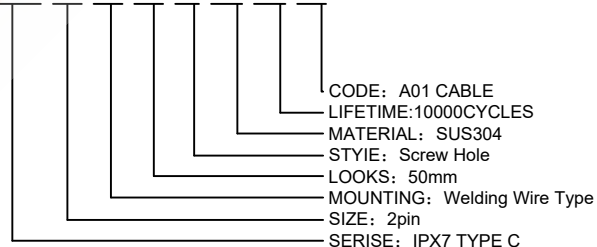


- CODE: A01 CABLE
- LIFETIME: 10000CYCLES
- MATERIAL: SUS304
- STYLE: Screw Hole
- LOOKS: 50mm
- MOUNTING: Welding Wire Type
- SIZE: 2pin
- SERISE: IPX7 TYPE C

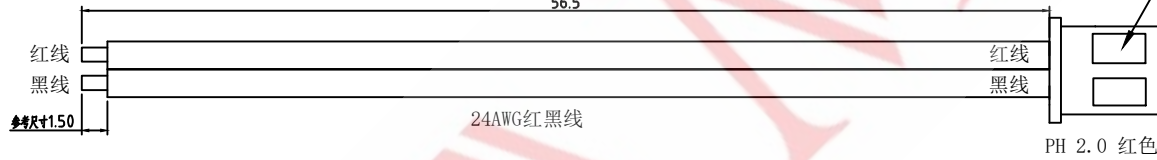

A9	VBUS	B12	GND
A12	GND	B9	VBUS
PIN	SIGNAL NAME	PIN	SIGNAL NAME

ITEM	PART NAME	Q'TY	FINISH	NOTE
1	线材	1	XH2.54-T 镀锡端子线径1.6mm	
3	Shell	1	SUS304R-1/2H Ni PlatingT=0.25mm	
2	Contact	6	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA10T (G.F30%)	



FIRST VIEW				The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM			
GENERAL TOLERANCE				TITLE: TYPE C 2.0 2Pin CABLE Type IPX7			
SCALE 1:1 UNIT mm				DWG NO: FKA02-P0001			
DESIGN WANGGUIFA 2018.06.12 ≥2~5< ±0.15				PART NO: FKA02210503L			
CHECKED ZHENGUILAN 2018.06.12 ≥0~2< ±0.15				MODEL NO: FKAKALCCA			
APPROVED LILIANJIANG 2018.06.14 ≥5 ±0.35				NAME: TYPE-C CONN			
SAMZO COMPONENTS Electronic switch and connector manufacturer							

