
8-322454-2 <

## SOLISTRAND TE Internal #: 8-322454-2 Closed Ring Tongue Terminal, 12 – 10 AWG, #8 Stud Size, 4.34 mm [.171 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated View on TE.com >



Terminals & Splices > Ring Terminals

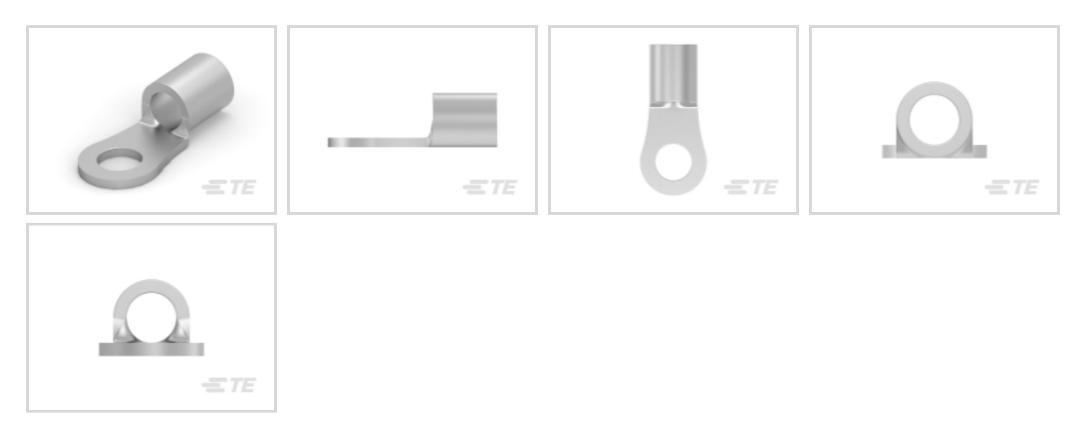

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 5180 – 13100 CMA

Stud Size: #8

### Features

#### Product Type Features

Ring Terminal Product Type

Closed Ring Tongue Terminal

Stud Size	#8
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	2
Body Features	
Product Weight	1.241 g
Contact Features	
Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Contact Underplating Material	Copper
Mechanical Attachment	
Wire Insulation Support	Without

#### 8-322454-2

Closed Ring Tongue Terminal, 12 – 10 AWG, #8 Stud Size, 4.34 mm [.171 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



#### Dimensions

Wire Size	5180 – 13100 CMA
Stud Diameter	4.34 mm[.171 in]
Tongue Thickness	.99 mm[.039 in]
Product Length	17.98 mm[.708 in]
Barrel Inside Diameter	3.28 mm[.129 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]
Operation/Application	
Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Industry Standards	
Government Qualified Terminal	No
Packaging Features	
Packaging Quantity	50

# Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and based on the information they provided. This information is subject to chang	


#### 8-322454-2

Closed Ring Tongue Terminal, 12 – 10 AWG, #8 Stud Size, 4.34 mm [.171 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated




EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

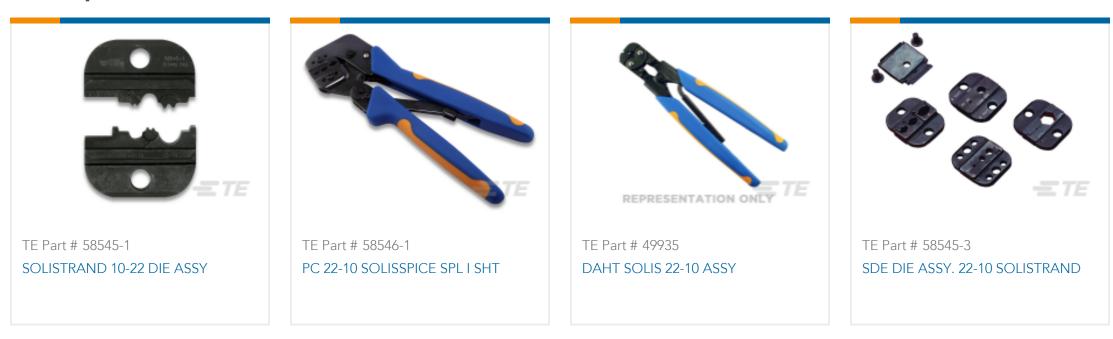

# Customers Also Bought

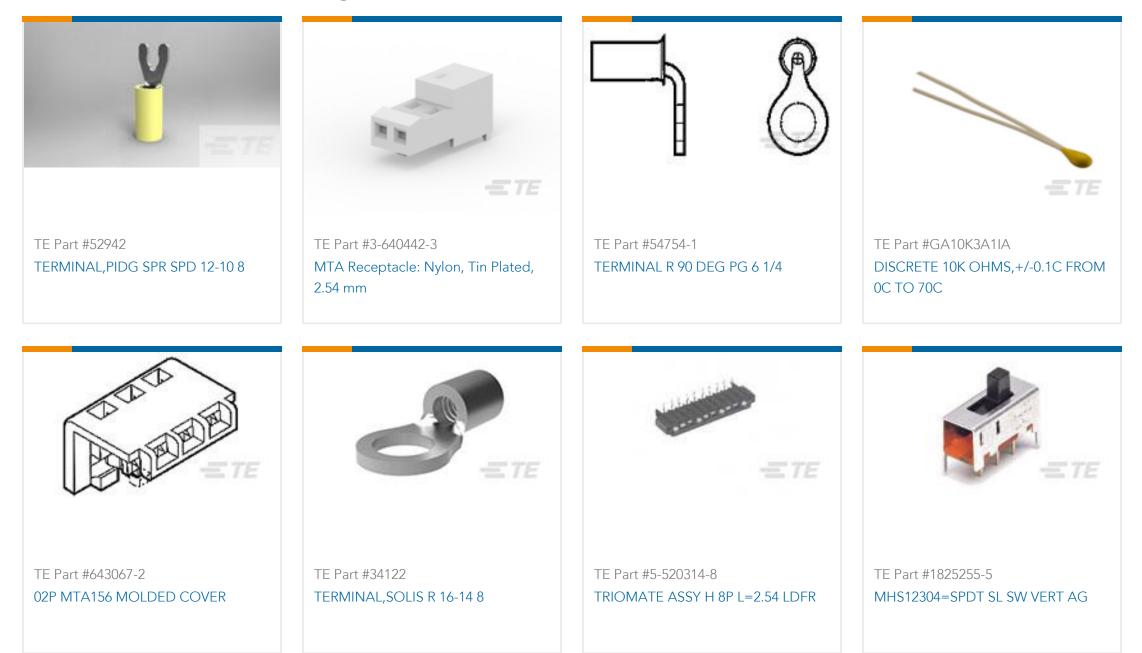



#### 8-322454-2

Closed Ring Tongue Terminal, 12 – 10 AWG, #8 Stud Size, 4.34 mm [.171 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



### Documents

Product Drawings TERMINAL, SOLIS R 12-10 8

English

#### **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_8-322454-2\_L.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_8-322454-2\_L.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_8-322454-2\_L.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOLISTRAND - QRG

English