


FEATURES

- 100% Tested at 200°C
- Absolute Maximum Operating Temperature: 225°C
- Guaranteed Temperature Coefficient

PIN CONFIGURATION

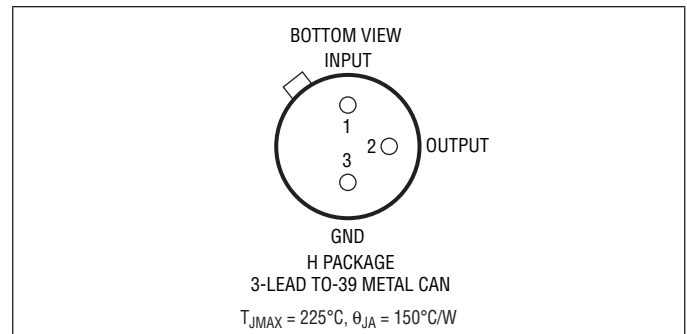

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

ORDER INFORMATION

ORDER PART NUMBER	PART MARKING	PACKAGE DESCRIPTION	TEMPERATURE RANGE
LT582XH	LT582UH	3-Lead TO-39 Metal Can	-55°C to 200°C

These parts are only available in SnPb finish.

This product is only offered in trays. For more information go to: <http://www.linear.com/packaging/>

ELECTRICAL CHARACTERISTICS $V_{IN} = 15\text{V}$, (Note 1)

SYMBOL	PARAMETER	CONDITIONS	MIN/MAX 25°C	TYP 150°C	TYP 175°C	MIN/MAX 200°C	UNITS
V_R	Output Voltage		Min	4.985	5.010	4.950	V
			Max	5.015		5.050	V
TC	Temperature Coefficient	-55°C ≤ T_A ≤ 125°C	10				ppm/°C
		125°C to 150°C		25			ppm/°C
		150°C to 175°C			90		ppm/°C
		125°C to 200°C				150*	ppm/°C
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	$10\text{V} \leq V_{IN} \leq 30\text{V}$	2	6	8	30	mV
		$8\text{V} \leq V_{IN} \leq 10\text{V}$	1	2	3	5	mV
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation (Sourcing)	$0\text{mA} \leq I_{OUT} \leq 5\text{mA}$	0.4	0.6	5	30*	mV/mA
I_Q	Quiescent Current		1.0	1.5	1.8	2.5	mA

*Not tested

Note 1: Devices are 100% tested at 200°C ±3° to the limits shown. Since parameters change rapidly with temperature, devices are guaranteed at 190°C ±3°C and QA testing is done at 190°C ±3°.

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.