




**Part Number :** [5031750700](#)

**Product Description :** 1.50mm Pitch, CLIK-Mate PCB Receptacle, Single Row, Through Hole, Right-Angle, Tin Plating, Positive Lock, with Peg, 7 Circuits, Natural

**Series Number :** 503175

**Status :** Active

**Product Category :** PCB Headers and Receptacles

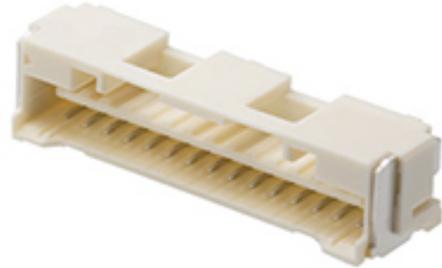

---

## Documents & Resources

### Drawings

[Drawing 5031750700\\_sd.pdf](#)

### 3D Models and Design Files

[2D Drawing DXF 5031750700.dxf](#)

[2D Drawing DXF \(PDF\) 5031750700.pdf](#)

[3D Model 5031750700\\_stp.zip](#)

### Specifications

[Application Specification AS-502578-001-001.pdf](#)

[Packaging Specification SPK-503175-001-001.pdf](#)

[Product Specification 5025780002-PS-000.pdf](#)

[Product Specification 5025781002-PS-000.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

[Multiple Part Product Compliance Statements](#)

- Eu RoHS

- REACH SVHC

- Low-Halogen

#### Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D

- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

#### EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	PCB Headers and Receptacles
Series	503175
Description	1.50mm Pitch, CLIK-Mate PCB Receptacle, Single Row, Through Hole, Right-Angle, Tin Plating, Positive Lock, with Peg, 7 Circuits, Natural
Application	Signal, Wire-to-Board
Component Type	PCB Receptacle
Product Family	CLIK-Mate Wire-to-Board Connectors
Product Name	CLIK-Mate
UPC	883906058135

### Electrical

Current - Maximum per Contact	2.0A
Voltage - Maximum	100V

### Physical

Circuits (Loaded)	7
Circuits (maximum)	7
Color - Resin	Beige
Durability (mating cycles max)	30
Glow-Wire Capable	No

Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	663.001/mg
Number of Rows	1
Orientation	Right Angle
Packaging Type	Tray
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm, 2.40mm
Pitch - Mating Interface	1.50mm
Pitch - Termination Interface	1.50mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Through Hole

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
1.50mm Pitch CLIK-Mate Single Row Plug Housings	<u>502578</u>
1.50mm Pitch CLIK-Mate-to-CLIK-Mate Off-the-Shelf (OTS) Cable Assemblies	<u>15135</u>