



# L34 Series 0.375" (9.5mm) Diameter Hole LED Panel Mount Indicator



Round LED indicator lights with internal cylindrical flat top lens and housing in one piece for 3/8" mounting hole

## Applications



- panel indication
- electrical panels
- entertainment
- industrial
- appliances
- displays

## Key Features

- 3/8" (0.375") diameter mounting hole
- one piece housing with integral cylindrical flat top lens, available in 6 colors: red, green, blue, white, clear and amber
- DC Voltage Range: 2 to 48 VDC
- wire leads: 6" (152.4mm), #18 AWG, bare cooper, PVC insulated, black and red, UL/CSA rated 105°C, 600V, UL 1015, 1/2" stripped.
- UL listed: File E20356

## Dimensions

mounting hole (dia.)

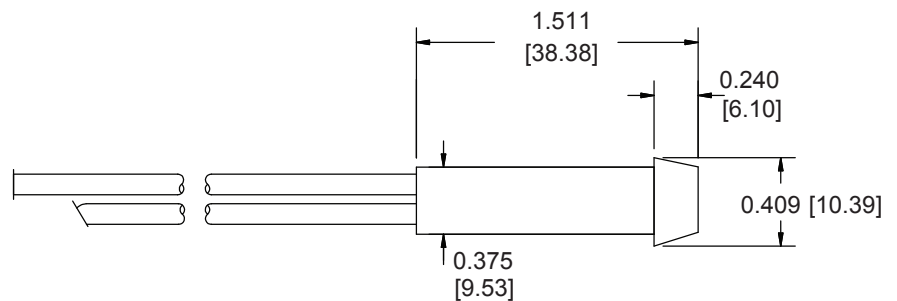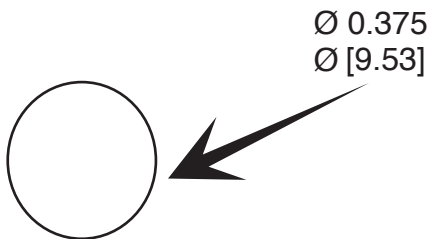

Dimensions in inches [mm]

## Product specifications and ordering data

Material	
One piece lens/housing	Nylon Zytel 6/6
Wire leads	Red and Black, PVC, 18-11C UL1015-1230, 105°C 600V

Installation specification	
Mounting hole	0.375" (9.525mm)
Panel thickness (minimum)	0.020" (0.508mm)
Wire leads	#18 AWG, 6" length

	LED Color	Lens Color	Test Current I <sub>f</sub>	Voltage
L34-R2-0581	Red	Red	20 mA	2 VDC
L34-G2-0582	Green	Green	10 mA	2 VDC
L34-A2-0583	Amber	Amber	10 mA	2 VDC
L34-B2-0584	Blue	Blue	20 mA	2 VDC
L34-W2-0585	White	Natural	14 mA	2 VDC
L34-Y2-0586	Yellow	Yellow	20 mA	2 VDC
L34-R6-0581	Red	Red	20 mA	6 VDC
L34-G6-0582	Green	Green	10 mA	6 VDC
L34-A6-0583	Amber	Amber	10 mA	6 VDC
L34-B6-0584	Blue	Blue	20 mA	6 VDC
L34-W6-0585	White	Natural	14 mA	6 VDC
L34-Y6-0586	Yellow	Yellow	20 mA	12 VDC
L34-R12-0581	Red	Red	20 mA	12 VDC
L34-G12-0582	Green	Green	10 mA	12 VDC
L34-A12-0583	Amber	Amber	10 mA	12 VDC
L34-B12-0584	Blue	Blue	20 mA	12 VDC
L34-W12-0585	White	Natural	14 mA	12 VDC
L34-Y12-0586	Yellow	Yellow	20 mA	24 VDC
L34-R24-0581	Red	Red	20 mA	24 VDC
L34-G24-0582	Green	Green	10 mA	24 VDC
L34-A24-0583	Amber	Amber	10 mA	24 VDC
L34-B24-0584	Blue	Blue	20 mA	24 VDC
L34-W24-0585	White	Natural	14 mA	24 VDC
L34-Y24-0586	Yellow	Yellow	20 mA	36 VDC
L34-R36-0581	Red	Red	20 mA	36 VDC
L34-G36-0582	Green	Green	10 mA	36 VDC
L34-A36-0583	Amber	Amber	10 mA	36 VDC
L34-B36-0584	Blue	Blue	20 mA	36 VDC
L34-W36-0585	White	Natural	14 mA	36 VDC
L34-Y36-0586	Yellow	Yellow	20 mA	36 VDC
L34-R48-0581	Red	Red	20 mA	48 VDC
L34-G48-0582	Green	Green	10 mA	48 VDC
L34-A48-0583	Amber	Amber	10 mA	48 VDC
L34-B48-0584	Blue	Blue	20 mA	48 VDC
L34-W48-0585	White	Natural	14 mA	48 VDC
L34-Y48-0586	Yellow	Yellow	20 mA	48 VDC

## Compliance and Approvals

