
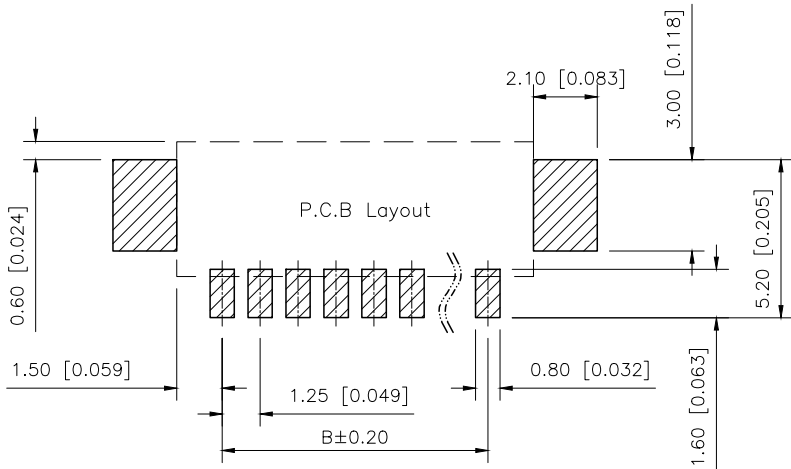
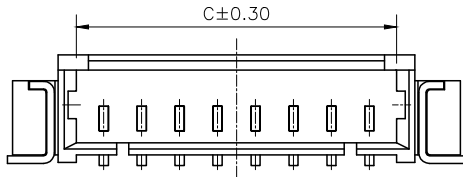



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图框升级整理图面	2024.08.13	阿 树

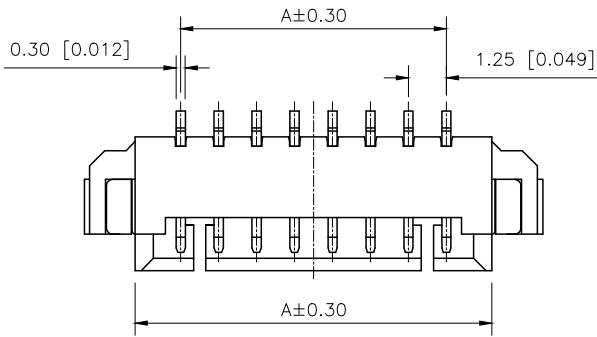

- SPECIFICATIONS
- Voltage rating:125V AC/DC
 - Current rating:1A AC/DC
 - Withstanding Voltage:250V AC/minute
 - Temperature range:-45°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤20mΩ
 - After environmental testing:≤40mΩ

PART NO.:
X9821 W R S-XX-9T SN
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
② Category:W-Wafer
③ Welding Board Angle:R-Stright 90°
④ Welding Way:S-SMT
⑤ Row No-Pin No: XX-02P~16P
⑥ Material:9T-PA9T UL94V-0
⑦ Planting Category:SN-Bright Tin Plating

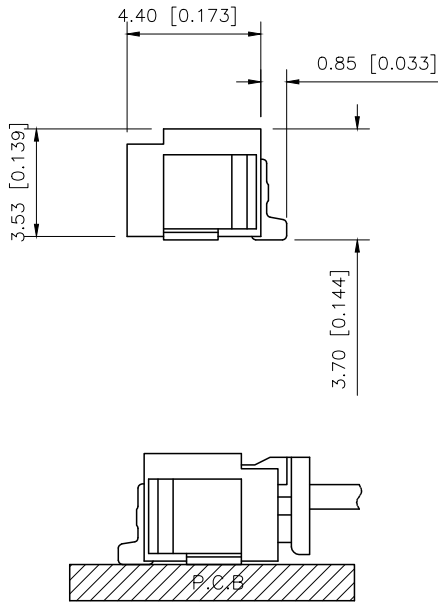

Poles	Dimension mm			Poles	Dimension mm		
	A	B	C		A	B	C
2	1.25	4.25	3.05	10	11.25	14.25	13.05
3	2.50	5.50	4.30	11	12.50	15.50	14.30
4	3.75	6.75	5.55	12	13.75	16.75	15.55
5	5.00	8.00	6.80	13	15.00	18.00	16.80
6	6.25	9.25	8.05	14	16.25	19.25	18.05
7	7.50	10.50	9.30	15	17.50	20.50	19.30
8	8.75	11.75	10.55	16	18.75	21.75	20.55
9	10.00	13.00	11.80				

X9821WRS-XX-9TSN	PA9T UL 94V-0	Brass	Tin-Plated	X9821H
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW:		MODEL TYPE: 1.25 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X9821WRS-XX-9TSN
APPROVED		SIZE:	A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1